

UL Certified Relays Catalog



www.elkoepna.com



ABOUT ELKO EP NORTH AMERICA

ELKO EP North America is a fast-growing US-based company representing a globally renowned brand with a 30-year history on the NA market under private labels, exporting to 80 countries with 15 branches worldwide. We are embarking on a new venture, proudly bringing the globally recognized ELKO brand directly to businesses and customers all across North America. With our headquarters nestled in the vibrant city of Miami and a strategically located warehouse in Louisville, KY, we can ensure a prompt service and product availability.

While our North American operations continue to thrive, our global reach is expansive. Under private labels, we collaborate with renowned entities worldwide, underscoring our global expertise and commitment to excellence. Our products are recognized for their high quality, holding UL, CE and EAC certifications.

Internationally, ELKO EP stands out as the largest DIN Rail Relay Manufacturer in the European Union. Our European headquarters consists of 400 dedicated employees, with 45 specialists engaged in Research & Development, pushing the boundaries of innovation.

With a revenue of 40 million USD, our commitment to quality, innovation, and customer satisfaction remains paramount.



Jan Pacovsky
Managing Member, CEO

Cell: +1 (608)746-1332

Email: pacovsky@elkoepna.com

www.elkoepna.com

5 Reasons to Become a Partner

- **Work Directly with the Manufacturer**

Forge a direct connection with the visionaries behind the products. Our EU-based R&D and manufacturing are enhanced by US-based warehouse, customer care and tech support.

- **US-Stocked Products**

Out commitment to local stock ensures zero drop-shipping and guarantees a swift delivery window of just 1-10 days.

- **Quality Endorsed by the North American Market**

Manufacturing for industry giants under private labels, ELKO EP products have been tested by the NA market and stood up to the highest standards.

- **US-Based Technical Support and Customer Care**

Our US-based team is ready to support you on all technical inquiries, with regular workshops being held for distributors. Customer care is available through phone and email, with average reply times of under 24h

- **An Unbeatable Price Advantage**

Savor the competitive edge with our direct-to-customer model, presenting partners with a lucrative margin.

Attained awards & Memberships




Electronic Components
Industry Association member



Vodafone
Company of the
Year 2012



Electronics
Representatives
Association member



Technology Fast 50



Global exporter
in 2016

...and many others.



ABOUT ELKO EP HOLDING

ELKO EP has been your partner in the field for 30 years, developing and manufacturing the highest quality electronic devices for electroinstallation and smart systems for residential and building automation.

ELKO EP employs more than 400 people across 15 foreign branches and exports its products to more than seventy countries. Company of the Year, Visionary of the Year, Superbrands and Global Exporter of the Year are just some of the awards we have received throughout the years as we consistently strive to move forward in the field of innovation and development.

Millions of relays, thousands of smart homes, hundreds of buildings and many satisfied customers - This is ELKO EP; a traditional company based in the center of Europe, where own development, production, logistics, and service are at the forefront of our focus.

Facts and stats



30 %

Czech

40 %

Export

30 %

Branches



WORLDWIDE

11 Branches
3 Franchises
80 Export Countries



400

Employees
in Holding




30 000 +

iNELS
Installations



30 000 000 +

Manufactured
Products



R&D

Continuously
Innovative



MANUFACTURER

Fully Automated
Complete Process



SUPPORT

24 / 7 / 365

World leader
In DIN Rail Relays Production

Product lines ELKO EP



Timers/Relays

Time relays, auxiliary relays, installation contactors, memory and bistable relays, staircase switches, time switches, twilight and light switches, dimmers and light intensity controllers, power supplies and bell transformers, controlling and signalling devices.

www.elkoep.com/relays



Monitoring Relays

Voltage relays 1-phase and 3-phase (undervoltage, overvoltage, phase failure, phase asymmetry and phase sequence), current relays, liquid level relays, thermostats, voltage indicator, power factor and frequency monitoring relays.

www.elkoep.com/monitoring

Multifunction current monitoring relay in 1P - PRI-34

It is a new line of PRI-34 current monitoring relays in a **multifunction** design. All types now measure **TRUE RMS** values (thus with minimal fault regardless of the shape of measured current). Of course, it is possible to **connect external current transformers** (possible extension of the measured range up to 1600A). There is a choice of eight functions incl. the memory ones.

Individual types are divided according to the nominal monitored current:

- PRI-34/1 A – monitored range AC 0.05 - 1 A
- PRI-34/2 A – monitored range AC 0.1 - 2 A
- PRI-34/5 A – monitored range AC 0.25 - 5 A
- PRI-34/8 A – monitored range AC 0.4 - 8 A
- PRI-34/16 A – monitored range AC 0.8 - 16 A



Multifunction voltage monitoring relay in 1P - HRN-3x, PMR1

The original HRN-3x types on a DIN rail will be replaced by new ones that are **multifunction** and bring several improvements. Now you have options with **one or two** output contacts. The **design into a socket** is the PMR1 model. As well as the previous novelty, also this one measures **TRUE RMS** values. This is related with monitoring of **DC voltage in higher ranges**. The original DC range was slightly modified for optional monitoring of 24V batteries. Multifunctionality enables the selection of up to nine functions incl. memory ones. Also an **external input** for memory reset was added.

Individual types are divided according to the monitored range:

On DIN rail:

- HRN-31, HRN-31/2, HRN-32/2 – monitored range AC/DC 48 to 276V
- HRN-36, HRN 36/2 – monitored range DC 6 to 30V
- HRN-39, HRN 39/2 – monitored range AC/DC 24 to 150V

Into a socket:

- PMR1-31, PMR1-31/2 – monitored range AC/DC 48 to 276V
- PMR1-36, PMR1-36/2 – monitored range DC 6 to 30V
- PMR1-39, PMR1-39/2 – monitored range AC/DC 24 to 150V



TIME RELAYS - MULTIFUNCTION

CRM-161 Multifunction time relay - economy version	(1-MODULE)	11
CRM-91H, CRM-92H, CRM-93H Multifunction time relays - BESTSELLER	(1-MODULE)	12
CRM-111H, CRM-112H, CRM-113H Multifunction time relays with inhibit delay	(1-MODULE)	14
CRM-121H Multifunction time relay with galvanically separated control input	(1-MODULE)	16
CRM-131H Multifunction time relay with three control inputs	(1-MODULE)	18
CRM-82TO True off delay time relay	(1-MODULE)	20

TIME RELAYS - SINGLEFUNCTION, SPECIAL

CRM-2T STAR (Λ)/ DELTA (Δ) time relay	(1-MODULE)	21
CRM-181J, CRM-182J, CRM-183J Singlefunction time relays	(1-MODULE)	22
CRM-2H Asymmetric flasher	(1-MODULE)	24

TIME RELAYS - PLUG-IN

PTRM-216TP, PTRM-216KP Multifunction time relays with inhibit delay	(11-PIN)	25
PTRM-216T, PTRM-216K Multifunction time relays with potential-free control input	(11-PIN)	27
PTRA-216T, PTRA-216K Multifunction time relays with three control inputs	(11-PIN)	29

VOLTAGE 1-PHASE

HRN-31, HRN-32/2, HRN-39 Multifunction voltage monitoring relays in 1P - AC/DC	(2-MODULE)	33
HRN-36 Multifunction voltage monitoring relay in 1P - DC	(2-MODULE)	33
PMR1-31, PMR1-39 Multifunction voltage monitoring relays in 1P - AC/DC	(8-PIN)	35
PMR1-36 Multifunction voltage monitoring relay in 1P - DC	(8-PIN)	35

VOLTAGE 3-PHASES

HRN-56 Voltage monitoring relays in 3P with adjustable level Umin	(1/3-MODULE)	37
HRN3-70, PMR3-70 Voltage monitoring relays in 3P with selectable range	(3-MODULE/8-PIN)	38
HRN3-80, HRN3-81 Voltage monitoring relays in 3P - selectable range (HRN3-80), fixed range (HRN3-81)	(1-MODULE)	40

CURRENT

PRI-32 Current monitoring relay of I_{max} level passing through a hole in 1P - AC	(1-MODULE)	43
PRI-34 Multifunction current monitoring relays in 1P - AC	(1-MODULE)	44
PRI-51 Current monitoring relays of I_{max} level in 1P - AC	(1-MODULE)	46

AUXILIARY RELAYS

VS116U, VS308U, Auxiliary relays	(BOX/1-MODULE)	48
--	----------------	----

WI-FI TIME SWITCHES

SHT-13, SHT-13/2 Multifunction digital time switch with Wi-Fi connection	(2-MODULE)	51
--	------------	----

POWER SUPPLIES AND BELL TRANSFORMERS

PS1M, PS2M, PS3M, PS4M, PS6M Switching power supplies DC - unregulated	(1/2/3/4-MODULE)	53
--	------------------	----

INSTALLATION CONTACTORS

VS120, VS220, VS325, VS340, VS363, VS425, VS440, VS463 Installation contactors	(1/2/3-MODULE)	56
--	----------------	----

NON-UL PRODUCTS

CRM-91HE, CRM-2HE, CRM-9S, HRN-100, HRH-5, MR-41, MR-42, TER-7, TER-9, SJR-2	(1/2-MODULE)	60
--	--------------	----

USE CASES - TOP 10 NEW RELAYS

HRN-31, HRN-32/2, HRN-36, HRN-39, HRN3-81, SHT-13 / SHT-13/2, PRI-34, HRN3-70, PMR1-31, PMR1-36/2	(1/2-MODULE)	62
---	--------------	----

USE CASES - TOP 10 NEW RELAYS BY US SALES

CRM-161, CRM-183J ZR, CRM-2H, CRM-82TO, CRM-91H, CRM-93H, HRN-56, PRI-51, VS116U, VS308U	(1-MODULE)	64
--	------------	----

TECHNICAL DETAILS

Loadability of products	69
Product packaging	71
Dimensions	72
Examples of use	75

Multifunction



CRM-161

6 functions, 6 time ranges, output contact 1x 8 A changeover, power supply AC 24-240 V, DC 24 V, economy version of CRM-91H. page 11



CRM-91H

10 functions, 10 time ranges, 1x output 16 A changeover/SPDT, multivoltage or 230 V supply. page 12



CRM-92H

10 functions, 10 time ranges, 2x output 16 A changeover/SPDT, multivoltage or 230V supply. page 12



CRM-93H

As CRM-91H, but output 1x 16 A + 2x 8 A changeover/SPDT. page 12



CRM-111H

11 functions 10 time ranges, output contact: 1x 16 A changeover. page 16



CRM-112H

10 functions, 10 time ranges, output contact: 2x 16 A changeover, mode selection of output contact. page 16



CRM-113H

10 functions, 10 time ranges, output contact: 1x 16 A + 2x 8 A changeover, mode selection of output contacts. page 16



CRM-121H

As CRM-111H, but with galvanically separated input. page 18



CRM-131H

11 functions, 10 time ranges, output contact: 1x 16 A changeover, three control inputs. page 18



CRM-82TO

"TRUE OFF DELAY relay - switch off after power supply failure for backup circuits. page 20

Singlefunction, special



CRM-2T

Star/delta timer relay page 21



CRM-181J

Variants of 4 functions with time range 0.1s - 100 h, output 1x 16 A changeover, UNI power supply. page 22



CRM-182J

Variants of 4 functions with time range 0.1s - 100 h, output 2x 16A changeover, UNI power supply. page 22



CRM-183J

As CRM-181J, but output 1x16A + 2x 8 A changeover. page 22



CRM-2H

Asymmetric flasher, independent time setting ON/OFF. page 24

PLUG-IN



PTRM-216TP

10 functions, 10 time ranges, output contact: 2x 16 A changeover, voltage dependent input, mode selection of output contact, tuning with dials. page 25



PTRM-216KP

As PTRM-216TP, but fine tuning using a knob. page 25



PTRM-216T

10 functions, 10 time ranges, output contact: 2x 16 A changeover, potential-free input, mode selection of output contact, dial tuning. page 27



PTRM-216K

As PTRM-216T, but fine tuning using a knob. page 27



PTRM-216T

10 function, 10 time ranges, output contact 2x 16 A changeover, three control inputs and mode selection of output contact, tuning with dials. page 29



PTRM-216K

As PTRM-216T, but fine tuning help with a knob. page 29

	CRM-161	CRM-91H	CRM-92H	CRM-93H	CRM-111H	CRM-112H	CRM-113H	CRM-121H	CRM-131H	CRM-82TO	CRM-2T	CRM-181JZR	CRM-181JZN	CRM-181JBL	CRM-181JOD	CRM-182JZR	CRM-182JZN	CRM-182JBL	CRM-182JOD	CRM-183JZR	CRM-183JZN	CRM-183JBL	CRM-183JOD	CRM-2H	PTRM-216TP	PTRM-216KP	PTRM-216T	PTRM-216K	PTRA-216T	PTRA-216K	
Design																															
1-MODULE	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●							
3-MODULE																															
PLUG-IN																									●	●	●	●	●	●	
Under the switch																										●	●	●	●	●	
Control elements																															
Rotary switches/potentiometers	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			●		●	
Large rotary knob																											●		●	●	
Buttons																															
External potentiometer																							●								
Time range																															
50 ms – 0.5 s					●	●	●	●	●																		●	●	●	●	●
0.1 – 1 s	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
1 – 10 s	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
3 – 30 s													●	●	●	●	●	●	●	●	●	●	●	●							
0.1 – 1 min	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
1 – 10 min	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
3 – 30 min												●	●	●	●	●	●	●	●	●	●	●	●	●							
0.1 – 1 h	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
1 – 10 h	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
3 – 30 h												●	●	●	●	●	●	●	●	●	●	●	●	●							
0.1 – 1 d		●	●	●	●	●	●	●	●		●														●	●	●	●	●	●	●
1 – 10 d		●	●	●																											
10 – 100 h					●	●	●	●	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
3 – 30 d					●	●	●	●	●		●														●	●	●	●	●	●	●
10 – 100 d											●													●							
0.5 – 10 min																															
0.01s – 100 h																															
0.1s – 999 h																															
Supply voltage																															
AC 230 V		□	□	□							●													●							
AC/DC 12–240 V		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
AC 24–240 V, DC 24 V	●																														
AC/DC 24–240 V																															
Output contact																															
1x changeover 8 A	●																														
1x changeover 16 A		●			●			●	●	●		●	●	●	●									●							
2x changeover 8 A											●																				
2x changeover 16 A			●													●	●	●	●							●	●	●	●	●	●
1x switching 16 A																															
1x changeover 16 A, 2x changeover 8 A				●		●	●													●	●	●	●								
Solid state (triac)																															

only for CRM-91H, CRM-93H



with the option of extending it to 30 min



	CRM-161	CRM-91H	CRM-92H	CRM-93H	CRM-111H	CRM-112H	CRM-113H	CRM-121H	CRM-131H	CRM-82TO	CRM-2T	CRM-181/ZR	CRM-181/ZN	CRM-181J BL	CRM-181J OD	CRM-182J ZR	CRM-182J ZN	CRM-182J BL	CRM-182 OD	CRM-183J ZR	CRM-183J ZN	CRM-183J BL	CRM-183J OD	CRM-2H	PTRM-216x	PTRM-216xP	PTRA-216x
Functions																											
Staircase switch																											
Programmable staircase switch (with/without signaling)																											
Delayed start	●	●	●	●	●	●	●	●	●	x	●	●				●				●					●	●	x
Delayed start with delay suppression					●		●	●				●				●				●					●	●	
Delayed start after switching on the control contact	●																										
Delayed start after opening of the control contact																											
Delayed start after closing and delayed return after opening the control contact		●	●	●	●	●	●	●	x																●	●	x
Delayed start (repeatable) until the power is turned off																											
Delayed start star / triangle											●																
2x delayed start																											
Delayed return	●	●	●	●	●	●	●	●	x			●				●				●					●	●	x
Delayed return with delay suppression					●	●	●	●				●				●				●					●	●	
Delay off on downward edge																											
TRUE OFF DELAY																											
TRUE SINGLE SHOT																											
TRUE INTERVAL ON																											
TRUE INTERVAL ON/OFF										●																	
Delayed return after closing the control contact		●	●	●	●	●	●	●	x																●	●	x
Delayed return after opening the control contact		●	●	●																							
Delayed return after opening the control contact with immediate closing of the output	●	●	●	●	●	●	●	●	x					●				●				●		●	●	x	
Delayed return after closing the control contact - renewable					●	●	●	●	x																●	●	x
Delayed return after closing and opening of the control contact					●	●	●	●	x																●	●	x
Delayed return when closing the control contact with delayed output																											
Emergency light tester																											
Flasher 1:1 starting with an impulse	●	●	●	●	●	●	●	●	x				●			●				●					●	●	x
Flasher 1:1 starting with a delay-suppressed impulse													●			●				●							
Flasher 1:1 starting with an impulse while the control button is pressed																											
Flasher 1:1 starting with a gap		●	●	●	●	●	●	●	x																●	●	x
Flasher 1:1 starting with a gap while the control button is pressed																											
Asymmetric flasher starting with an impulse																								●			
Asymmetric flasher starting with a gap																								●			
Impulse relay		●	●	●	●	●	●	●																	●	●	
Impulse relay with delay	●				●			●	x																		x
Pulse generator		●	●	●	●	●	●	●	x																●	●	x
Pulse generator with delay suppression					●	●	●	●																	●	●	

x functions controlled by inputs START, INHIBIT, RESET
 ■ functions controlled by inputs START, STOP




EAN code
CRM-161: 8595188181617


Technical parameters		CRM-161
Power supply		
Supply terminals:	A1 - A2	
Voltage range:	AC 24 - 240 V DC 24 V (AC 50-60 Hz)	
Power input (max.):	2 VA/1.5 W	
Supply voltage tolerance:	-15 %; +10 %	
Supply indication:	green LED	
Time circuit		
Number of functions:	6	
Time ranges:	0.1 s - 10 hrs	
Time setting:	rotary switch and potentiometer	
Time deviation:	5 % - mechanical setting	
Repeat accuracy:	0.2 % - set value stability	
Temperature coefficient:	0.01 %/°C, at = 20 °C (0.01 %/°F, at = 68 °F)	
Output		
Number of contacts:	1x changeover/SPDT (AgNi)	
Current rating:	8 A/AC1; 1/2 HP 240 Vac, 1/3 HP 120 Vac; PD. B300	
Breaking capacity:	2000 VA/AC1, 192 W/DC	
Switching voltage:	250 V AC/24 V DC	
Max. power dissipation:	0.6 W	
Output indication:	multifunction red LED	
Mechanical life:	10.000.000 ops.	
Electrical life (AC1):	100.000 ops.	
Control		
Control. terminals:	A1-S	
Load between S-A2:	Yes	
Impulse length:	min. 25 ms/max. unlimited	
Reset time:	max. 150 ms	
Other information		
Operating temperature:	-20 .. +55 °C (-4 .. 131 °F)	
Storage temperature:	-30 .. +70 °C (-22 .. 158 °F)	
Dielectric strength:	4kV AC (supply - output)	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Protection degree:	IP40 from front panel/IP20 terminals	
Overvoltage category:	III.	
Pollution degree:	2	
Max. cable size (mm²):	solid wire max. 1x 2.5 or 2x 1.5/ with sleeve max. 1x 2.5 (AWG 12)	
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")	
Weight:	62 g (2.2 oz.)	
Standards:	EN 61812-1	

- Multifunction economy version of time relay for universal use in automation, control and regulation or in house installations.
- Universal supply voltage: AC 24 – 240 V (AC 50/60 Hz) and DC 24 V.
- Comfortable and well-arranged function and time-range setting by rotary switches.
- Time scale 0.1 s - 10 hrs divided into 6 ranges:
(0.1 s - 1 s / 1 s - 10 s / 0.1 min - 1 min / 1 min - 10 min / 0.1 hrs - 1 h / 1 h - 10 hrs).
- Output contact: 1x changeover/SPDT 8 A.
- Multifunction red LED flashes or shines depending on the operating status.


Description

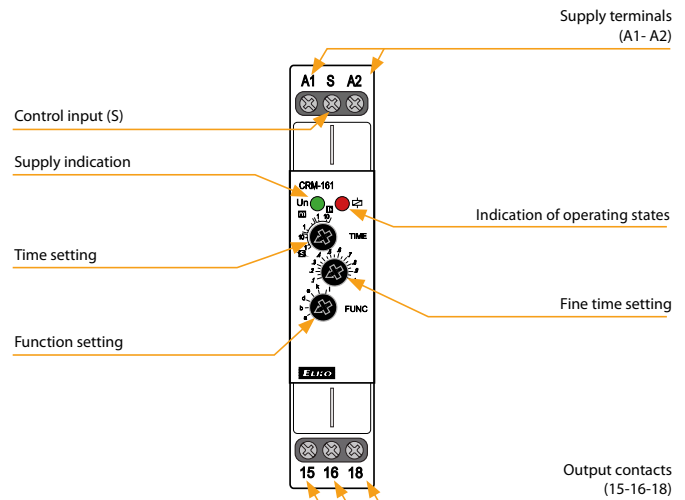

Functions

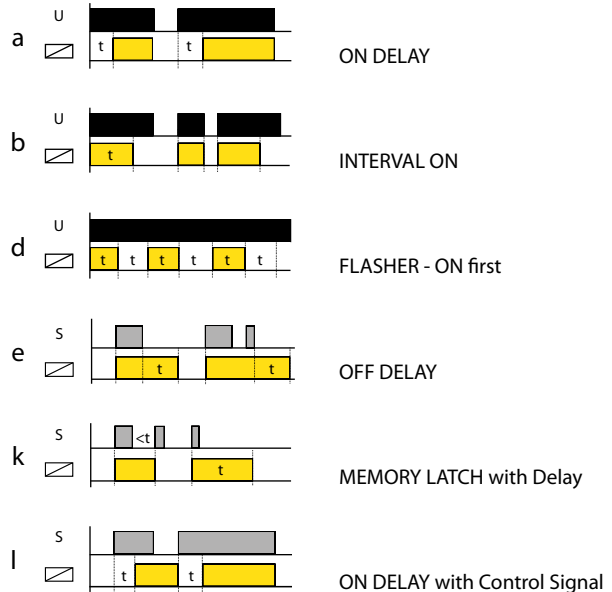

Connection

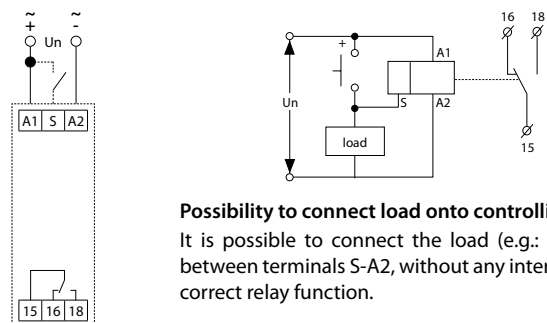


Possibility to connect load onto controlling input
It is possible to connect the load (e.g.: contactor) between terminals S-A2, without any interruption of correct relay function.


Indication of operating states

Examples of signaling

Function a



Function e



CRM-91H, CRM-92H, CRM-93H | Multifunction time relays




EAN code
CRM-91H/UNI: 8595188112420
CRM-92H/UNI: 8595188176897
CRM-93H/UNI: 8595188112468


Technical parameters		CRM-91H	CRM-92H	CRM-93H
Power supply				
Supply terminals:	UNI 230	A1 - A2		
Voltage range:		AC/DC 12 - 240 V (AC 50-60 Hz)		
Power input (max.):		2 VA/1.5 W	2.5 VA/1.5 W	2.5 VA/1.5 W
Voltage range:		AC 230 V (50/60 Hz)		
Power input (max.):		3VA/1.4W	-	4VA/2W
Supply voltage tolerance:		-15 %; +10 %		
Supply indication:	green LED			
Time circuit				
Number of functions:	10			
Time ranges:	0.1 s - 10 days			
Time setting:	rotary switch and potentiometer			
Time deviation:	5 % - mechanical setting			
Repeat accuracy:	0.2 % - set value stability			
Temperature coefficient:	0.01 %/°C, at = 20 °C (0.01 %/°F, at = 68 °F)			
Output				
Number of contacts 1:	1x changeover/SPDT (AgNi)			
Current rating:	16 A/AC1; 1 HP 240 Vac, 1/2 HP 120 Vac; PD. B300			
Breaking capacity:	4000 VA/AC1, 384 W/DC			
Electrical life (AC1):	100.000 ops.			
Number of contacts 2 (3):	x	1x chang./SPDT (AgNi)	2x chang./DPDT (AgNi)	
Current rating:	x	16 A/AC1; 1 HP 240 Vac, 1/2 HP 120 Vac; PD. B300	8 A/AC1; 1/2 HP 240Vac; PD. B300	
Breaking capacity:	x	4000 VA/AC1, 384 W/DC	2000 VA/AC1, 192 W/DC	
Electrical life (AC1):	x	100.000 ops.	50.000 ops.	
Switching voltage:	250 V AC/24 V DC			
Max. power dissipation:	1.2 W	2.4 W	2.4 W	
Mechanical life:	10.000.000 ops.			
Control				
Control. terminals:	A1-S			
Load between S-A2:	Yes			
Impulse length:	min. 25 ms/max. unlimited			
Reset time:	max. 150 ms			
Other information				
Operating temperature:	-20 .. +55 °C (-4 .. 131 °F)			
Storage temperature:	-30 .. +70 °C (-22 .. 158 °F)			
Dielectric strength:				
supply - output 1	4kV AC			
supply - output 2 (3)	x	4kV AC	1kV AC	
output 1 - output 2	x	4kV AC	1kV AC	
output 2 - output 3	x	x	1kV AC	
Operating position:	any			
Mounting:	DIN rail EN 60715			
Protection degree:	IP40 front panel/IP20 terminals			
Overvoltage category:	III.			
Pollution degree:	2			
Max. cable size (mm²):	solid wire max. 1x 2.5 or 2x 1.5/ with sleeve max. 1x 2.5 (AWG 12)			
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")			
Weight:	UNI - 62 g (2.2 oz) 230 - 57 g (2 oz)	UNI - 85 g (3 oz) -	UNI - 85 g (3 oz) 230 - 80 g (2.8 oz)	
Standards:	EN 61812-1			

- Multifunction time relay for universal use in automation, control and regulation or in house installations.
- Comfortable and well-arranged function and time-range setting by rotary switches.
- Multifunction red LED flashes or shines depending on the operating status.

Description

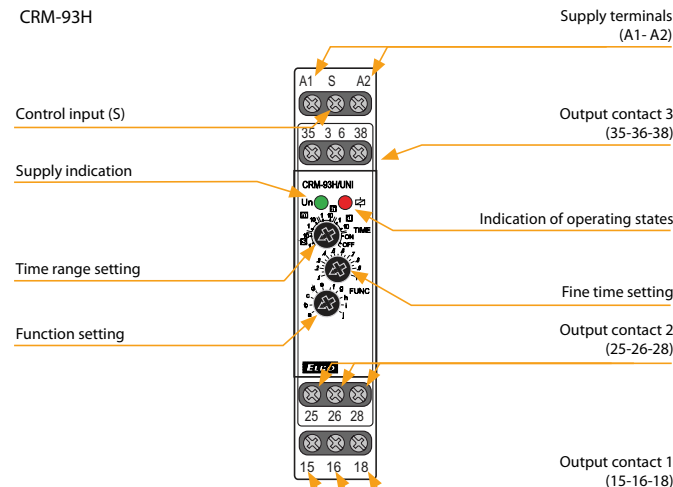


Connection

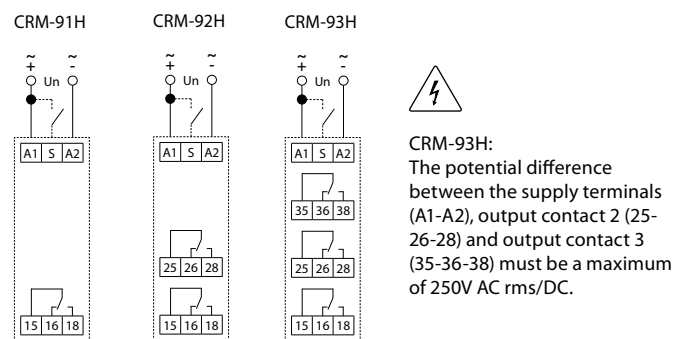


CRM-93H:
The potential difference between the supply terminals (A1-A2), output contact 2 (25-26-28) and output contact 3 (35-36-38) must be a maximum of 250V AC rms/DC.

Possibility to connect load onto controlling input
It is possible to connect the load (e.g.: contactor) between terminals S-A2, without any interruption of correct relay function.



Indication of operating states

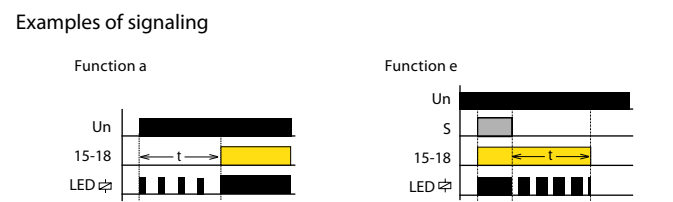


Function

**ON DELAY**

When the input voltage U is applied, timing delay t begins. Relay contacts R change state after time delay is complete. Contacts R return to their shelf state when input voltage U is removed. Trigger switch is not used in this function.

**INTERVAL ON**


When input voltage U is applied, relay contacts R change state immediately and timing cycle begins. When time delay is complete, contacts return to shelf state. When input voltage U is removed, contacts will also return to their shelf state. Trigger switch is not used in this function.

**FLASHER - OFF first**


When input voltage U is applied, time delay t begins. When time delay t is complete, relay contacts R change state for time delay t. This cycle will repeat until input voltage U is removed. Trigger switch is not used in this function.

**FLASHER - ON first**


When input voltage U is applied, relay contacts R change state immediately and time delay t begins. When time delay t is complete, contacts return to their shelf state for time delay t. This cycle will repeat until input voltage U is removed. Trigger switch is not used in this function.

**OFF DELAY**


Input voltage U must be applied continuously. When trigger switch S is closed, relay contacts R change state. When trigger switch S is opened, delay t begins. When delay t is complete, contacts R return to their shelf state. If trigger switch S is closed before time delay t is complete, then time is reset. When trigger switch S is opened, the delay begins again, and relay contacts R remain in their energized state. If input voltage U is removed, relay contacts R return to their shelf state.

**SINGLE SHOT**


Upon application of input voltage U, the relay is ready to accept trigger signal S. Upon application of the trigger signal S, the relay contacts R transfer and the preset time t begins. During time-out, the trigger signal S is ignored. The relay resets by applying the trigger switch S when the relay is not energized.

**SINGLE SHOT falling edge**


Upon application of input voltage U, the relay is ready to accept trigger signal S. Upon application of the trigger signal S, the relay contacts R transfer and the preset time t begins. At the end of the preset time t, the relay contacts R return to their normal condition unless the trigger switch S is opened and closed prior to time out t (before preset time elapses). Continuous cycling of the trigger switch S at a rate faster than the preset time will cause the relay contacts R to remain closed. If input voltage U is removed, relay contacts R return to their shelf state.

**ON/OFF DELAY**

Input voltage U must be applied continuously. When trigger switch S is closed, time delay t begins. When time delay t is complete, relay contacts R change state and remain transferred until trigger switch S is opened. If input voltage U is removed, relay contacts R return to their shelf state.

**MEMORY LATCH**

Input voltage U must be applied continuously. When trigger switch S is closed, time delay t begins. When time delay t is complete, relay contacts R change state and remain transferred until trigger switch S is opened. If input voltage U is removed, relay contacts R return to their shelf state.

**PULSE GENERATOR**

Upon application of input voltage U, a single output pulse of 0.5 seconds is delivered to relay after time delay t. Power must be removed and reapplied to repeat pulse. Trigger switch is not used in this function.

CRM-111H, CRM-112H, CRM-113H | Multifunction time relay with inhibit delay



EAN code
CRM-111H/UNI: 8595188175548
CRM-112H/UNI: 8595188175531
CRM-113H/UNI: 8595188180634

Technical parameters CRM-111H CRM-112H CRM-113H

Power supply

Supply terminals:	A1-A2		
Supply voltage:	AC/DC 12 - 240 V (AC 50/60 Hz)		
Consumption (max.):	2 VA/1.5 W	2.5 VA/1.5 W	2.5 VA/1.5 W
Supply voltage tolerance:	-15 %; +10 %		
Supply indication:	green LED		

Time circuit

Number of functions:	11	10	10
Time ranges:	50 ms – 30 days		
Time setting:	rotary switches and potentiometers		
Time deviation*:	5 % – mechanical setting		
Repeat accuracy:	0.2 % – set value stability		
Temperature coefficient:	0.01 %/°C, at = 20 °C (0.01 %/°F, at = 68 °F)		

Output

Contact type 1:	1x changeover/SPDT (AgNi)		
Current rating:	16 A/AC1; PD. B300		
Breaking capacity:	4000 VA/AC1, 384 W/DC1		
Electrical life (AC1):	100.000 ops.		
Contact type 2 (3):	x	1x chang./SPDT (AgNi)	2x chang./DPDT (AgNi)
Current rating:	x	16 A/AC1; PD. B300	8 A/AC1; PD. B300
Breaking capacity:	x	4000 VA/AC1, 384 W/DC1	2000 VA/AC1, 192 W/DC1
Electrical life (AC1):	x	100.000 ops	50.000 ops.
Switching voltage:	250V AC/24 V DC		
Power dissipation (max.):	1.2 W	2.4 W	2.4 W
Output indication:	multifunction red LED		
Mechanical life:	10.000.000 ops.		

Control

Control terminals:	A1-S		
Load between S-A2:	Yes		
Impulse length:	min. 25 ms/max. unlimited		
Reset time:	max. 150 ms		


Other information

Operating temperature:	-20 .. +55 °C (-4 .. 131 °F)		
Storage temperature:	-30 .. +70 °C (-22 .. 158 °F)		
Dielectric strength:			
supply – output 1	AC 4 kV		
supply – output 2 (3)	x	AC 4 kV	AC 1 kV
output 1 – output 2	x	AC 4 kV	AC 1 kV
output 2 – output 3	x	x	AC 1 kV
Operating position:	any		
Mounting:	DIN rail EN 60715		
Protection degree:	IP40 front panel/IP20 terminals		
Overvoltage category:	III.		
Pollution degree:	2		
Cross-wire section – solid/stranded with ferrule (mm²):	max. 1x 2.5 or 2x 1.5/ max. 1x 2.5 (AWG 12)		
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")		
Weight:	62 g (2.2 oz.)	85 g (3 oz.)	85 g (3 oz.)
Standards:	EN 61812-1		


* for adjustable delay <100 ms, a time deviation of ± 10 ms applies

- Multifunction time relay for universal use in automation, control and regulation or in house installations.
- All functions initiated by the supply voltage, except for the flasher function, can use the control input to inhibit the delay (pause).
- Mode selection - according to the set function, permanently closed, permanently open, function of MEMORY LATCH with delay (CRM-111H)/switching of the second output contact according to supply voltage (CRM-113H).
- Multifunction red LED flashes or shines depending on the operating status.

Description

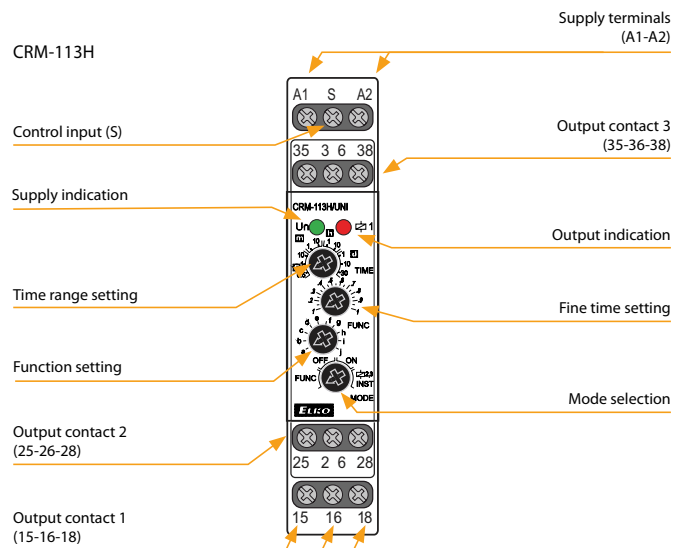


Connection

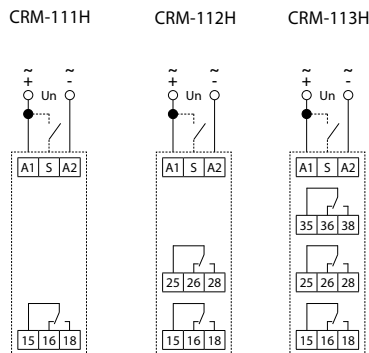



CRM-113H:
The potential difference between the supply terminals (A1-A2), output contact 2 (25-26-28) and output contact 3 (35-36-38) must be a maximum of 250 V AC rms/DC.

Possibility to connect load onto controlling input

It is possible to connect the load (e.g.: contactor) between terminals S-A2, without any interruption of correct relay function.



Indication of operating states

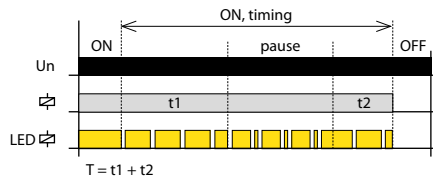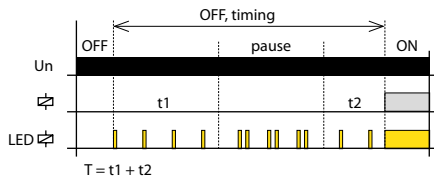

Mode selection

FUNC. Settings function mode
The desired function a-j is set with the FUNC rotary switch.

OFF. Output contact open mode



ON. Output contact closed mode



i Function: MEMORY LATCH with delay (Only for CRM-111H)



When the supply voltage is applied, the relay is open. If the control contact is closed, the relay closes and the time delay T starts. It does not matter the length of the control pulse. When the timing is complete, the relay opens. If the control contact is closed during timing, the relay opens immediately. Each time the control contact closes during relay timing, it changes status.

2,3 INST. Second or third output contact instantaneous (Only for CRM-112H, CRM-113H)



The second or third output contact switches according to the supply voltage. The first output contact switches according to the function (a-j) set by the trimmer FUNC.

Function

Function (page 17).

CRM-121H | Multifunction time relay with galvanically separated control input




EAN code
CRM-121H/UNI: 859518817555

Technical parameters CRM-121H	
Power supply	
Supply terminals:	A1 - A2
Voltage range:	AC/DC 12 - 240 V (AC 50-60 Hz)
Power input (max.):	2 VA/1.5W
Supply voltage tolerance:	-15 %; +10 %
Supply indication:	green LED
Time circuit	
Number of functions:	11
Time ranges:	50 ms - 30 days
Time setting:	rotary switch and potentiometer
Time deviation:*	5 % - mechanical setting
Repeat accuracy:	0.2 % - set value stability
Temperature coefficient:	0.01 %/°C, at = 20 °C (0.01 %/°F, at = 68 °F)
Output	
Number of contacts	1x changeover/SPDT (AgNi)
Current rating:	16 A/AC1; 1 HP 240 Vac, 1/2 HP 120 Vac; PD. B300
Breaking capacity:	4000 VA/AC1, 384 W/DC
Switching voltage:	250 V AC/24 V DC
Max. power dissipation:	1.2 W
Output indication:	multifunction red LED
Mechanical life:	10.000.000 ops.
Electrical life (AC1):	100.000 ops.
Control	
Control terminals:	S1-S2
Impulse length:	min. 25 ms/max. unlimited
Reset time:	max. 150 ms
Other information	
Operating temperature:	-20 .. +55 °C (-4 ..131 °F)
Storage temperature:	-30 .. +70 °C (-22 ..158 °F)
Dielectric strength:	4 kV AC (supply - output)
	4 kV AC (supply - control input)
Operating position:	any
Mounting:	DIN rail EN 60715
Protection degree:	IP40 from front panel/IP10 terminals
Overvoltage category:	III.
Pollution degree:	2
Max. cable size (mm²):	solid wire max. 2x 2.5 or 1x 4/ with sleeve max. 1x 2.5 or 2x 1.5 (AWG 12)
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")
Weight:	72 g (2.5 oz.)
Standards:	EN 61812-1


* for adjustable delay <100 ms, a time deviation of ± 10 ms applies

- Multifunction time relay for universal use in automation, control and regulation or in house installations.
- Galvanically separated control input (Power Trigger).
- All functions initiated by the supply voltage, except for the flasher function, can use the control input to inhibit the delay (pause).
- Mode selection - according to the set function, permanently closed, permanently open, function of MEMORY LATCH with delay.
- Time scale 50 ms - 30 days divided into 10 ranges.
- Multifunction red LED flashes or shines depending on the operating status.

Description

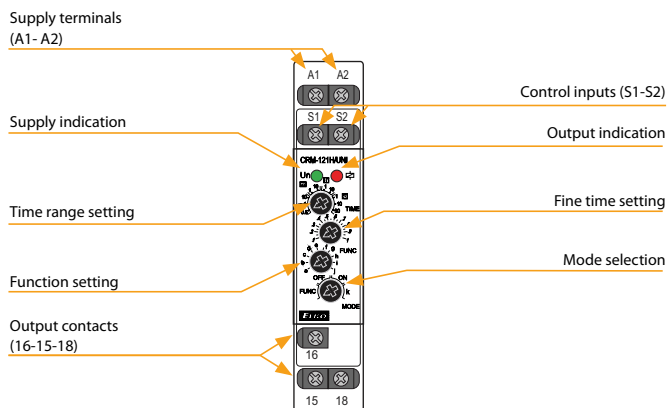


Connection



(Range of control voltage same as supply voltage)

Indication of operating states

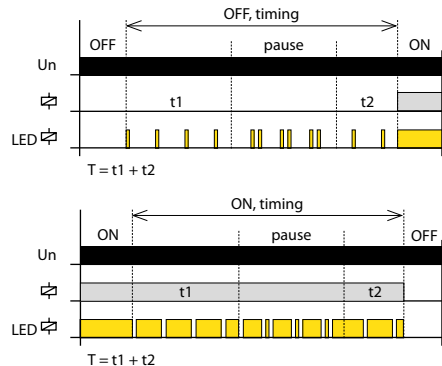

Mode selection

FUNC. Settings function mode

The desired function a-j is set with the FUNC rotary switch.

OFF. Output contact open mode



ON. Output contact closed mode



k. Function: MEMORY LATCH with delay



When the supply voltage is applied, the relay is open. If the control contact is closed, the relay closes and the time delay T starts. It does not matter the length of the control pulse. When the timing is complete, the relay opens. If the control contact is closed during timing, the relay opens immediately. Each time the control contact closes during relay timing, it changes status.


Function

a. ON DELAY




When the supply voltage is applied, the time delay T begins. When the timing is complete, the relay closes and this condition continues until the supply voltage is disconnected.

ON DELAY with Inhibit




If the control contact is closed and the supply voltage is connected, the relay is opened and timing does not start until the control contact opens. When the timing is complete, the relay closes. If the control contact is closed during timing, the timing is interrupted and continues only after the control contact opens.

b. INTERVAL ON



After supply voltage relay closes and starts the delay time T. After the end of the timing relay opens and this state lasts until the supply voltage is disconnected.

INTERVAL ON with Inhibit




If the control contact is closed and the supply voltage is connected, the relay will close and the timing will start only after the control contact has been opened. When the timing is complete, the relay opens. If the control contact is closed during timing, the timing is interrupted and continues only after the control contact opens.

c. FLASHER - ON first



After supply voltage relay closes and starts the delay time T. After the end of the timing relay opens and again runs delay time T. When the timing is complete, the relay closes again and the sequence is repeated until the supply voltage is disconnected. If the control contact is closed during timing, this does not affect the operation of the cycler.

FLASHER - OFF first




If the control contact is closed during timing; this does not affect the operation of the cycler. If the control contact is closed and the supply voltage is connected, the cycler starts with a pause (relay open).

d. MEMORY LATCH




When the supply voltage is applied, the relay is open. When the control contact is closed, the relay closes. The status does not change when the control contact is opened. When the control contact is closed again, the relay opens. Each time the control contact is closed, the relay changes status.

e. OFF DELAY




When the supply voltage is applied, the relay is open. When the control contact is closed, the relay closes. When the control contact opens, the time delay T begins. If the control contact is closed during timing, the time is reset and the relay remains closed. When the control contact opens, the time delay T starts again and opens when the relay closes.

f. SINGLE SHOT




When the supply voltage is applied, the relay is open. When the control contact is closed, the relay closes and the time delay T begins. Closing the control contact during timing is ignored.

g. WATCHDOG




When the supply voltage is applied, the relay is open. When the control contact is closed, the relay closes and the time delay T begins. Closing the control contact during timing triggers a new time delay T - the relay closing time is thus increased.

h. PULSE GENERATOR 0.5 s




After the supply voltage has been applied, the time delay T begins. When the timing is complete, the relay closes for a fixed time (0.5 s).

PULSE GENERATOR 0.5 s with Inhibit



After supply voltage starts the time delay T. By closing timing of the control contact during timing is suspended. When the control contact opens, the time interval is completed and the relay closes for a fixed time (0.5 s).

i. INTERVAL ON/OFF



When the supply voltage is applied, the relay is open. When the control contact is closed, the relay closes and the time delay T begins. When the control contact is opened, the relay closes and the time delay T begins. If the control contact is open during timing, the relay remains closed for 2T. When the timing is complete, the relay opens. Any other change of control contact status during timing is ignored.

j. ON/OFF DELAY



When the supply voltage is applied, the relay is open. If control contact is closed, time delay T starts. When the control contact is opened, a new time delay T begins. If the control contact is open during timing, the relay closes at the end of the timing and opens the relay after the new time delay. Any other change of control contact status during timing is ignored.

CRM-131H | Multifunction time relay with three control inputs



EAN code
CRM-131H/UNI: 8595188175562


Technical parameters		CRM-131H
Power supply		
Supply terminals:	A1 - A2	
Voltage range:	AC/DC 12 - 240 V (AC 50-60 Hz)	
Power input (max.):	2 VA/1.5W	
Supply voltage tolerance:	-15 %; +10 %	
Supply indication:	green LED	
Time circuit		
Number of functions:	11	
Time ranges:	50 ms - 30 days	
Time setting:	rotary switch and potentiometer	
Time deviation:*	5 % - mechanical setting	
Repeat accuracy:	0.2 % - set value stability	
Temperature coefficient:	0.01 %/°C, at = 20 °C (0.01 %/°F, at = 68 °F)	
Output		
Number of contacts	1x changeover/SPDT (AgNi)	
Current rating:	16 A/AC1; 1 HP 240 Vac, 1/2 HP 120 Vac; PD. B300	
Breaking capacity:	4000 VA/AC1, 384 W/DC	
Switching voltage:	250 V AC/24 V DC	
Max. power dissipation:	1.2 W	
Output indication:	multifunction red LED	
Mechanical life:	10.000.000 ops.	
Electrical life (AC1):	100.000 ops.	
Control		
Load between I, S, R - A2:	Yes	
Control terminals:	I, S, R - A1	
Impulse length:	min. 25 ms/max. unlimited	
Reset time:	max. 150 ms	
Other information		
Operating temperature:	-20 .. +55 °C (-4 .. 131 °F)	
Storage temperature:	-30 .. +70 °C (-22 ..158 °F)	
Dielectric strength:	4 kV AC (supply - output)	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Protection degree:	IP40 from front panel/IP20 terminals	
Overvoltage category:	III.	
Pollution degree:	2	
Max. cable size (mm²):	solid wire max. 1x 2.5 or 2x 1.5/ with sleeve max. 1x 2.5 (AWG 12)	
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")	
Weight:	61 g (2.2 oz.)	
Standards:	EN 61812-1	

* for adjustable delay <100 ms, a time deviation of ± 10 ms applies


- Multifunction time relay for universal use in automation, control and regulation or in house installations.
- Three control inputs - START, INHIBIT, RESET.
- Mode selection - according to the set function, permanently closed, permanently open, function of MEMORY LATCH with delay.
- Multifunction red LED flashes or shines depending on the operating status.

Description


Supply terminals
(A1 - A2)

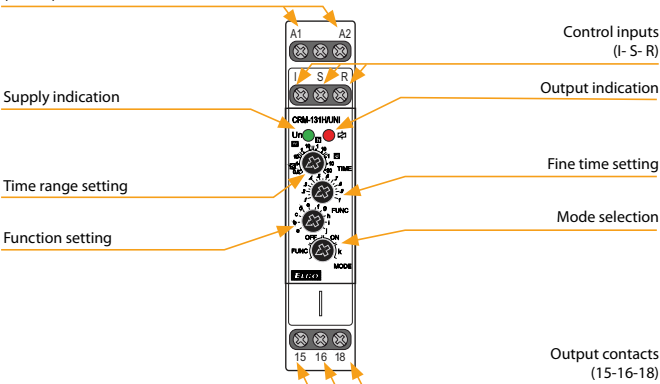

Connection



Indication of operating states

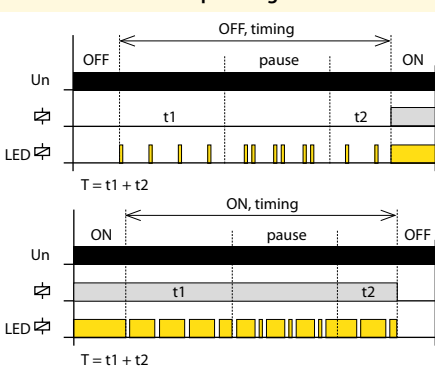

Mode selection

FUNC. Settings function mode
The desired function a-j is set with the FUNC rotary switch.


OFF. Output contact open mode



ON. Output contact closed mode



k. MEMORY LATCH with delay

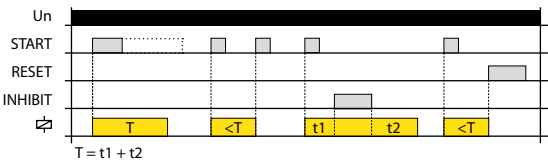

When the supply voltage is applied, the relay is open. If the START control contact is closed, the relay closes and the time delay T starts. It does not matter the length of the control pulse. When the timing is complete, the relay opens. If the START control contact is closed during timing, the relay opens immediately. Each time the control contact closes during relay timing, it changes status. Closing the INHIBIT control contact pauses the timing, after opening the INHIBIT control contact the timing continues from the moment of interruption. Closing the RESET control contact immediately ends the timing and the relay opens, just like as when the supply voltage is disconnected.

Function


Control input function description:

- Contact START starts the time function
- INHIBIT contact pauses timing (pause)
- The RESET contact simulates switching the supply voltage on and off

Same for all features:


- If the control contact START is closed and the supply voltage is connected, the time function is activated when the supply voltage is connected.
- Closing the control contact INHIBIT pauses the timing, after opening the control contact INHIBIT timing continues from the moment of interruption.
- If the INHIBIT control contact is closed, the START control contact is activated and the timing is paused.
- Closing the control contact RESET immediately terminates the timing and the relay opens, just as when the supply voltage is disconnected.
- If the control contact RESET is closed and then the control contact START is closed, the time function is activated when the control contact RESET is opened as well as when the supply voltage is connected.

a. ON DELAY with Control Signal

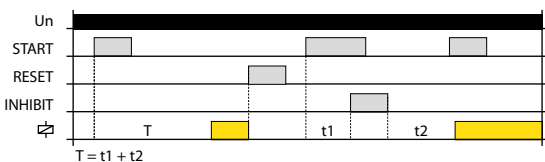


When the supply voltage is applied, the relay is open. If the control contact START is closed, the time delay T starts. The closing of the START control contact during timing is ignored.

b. INTERVAL ON with Control Signal

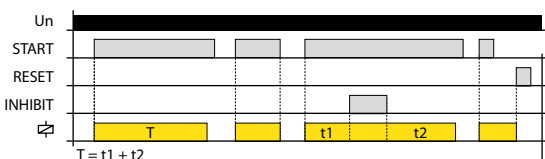


When the supply voltage is applied, the relay is open. When the control contact START is closed, the relay closes and the time delay T begins. If the START control contact is open during timing, the time interval is immediately terminated and the relay opens.

c. FLASHER - ON first with Control Signal

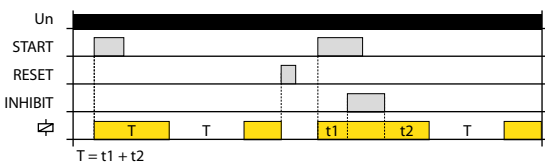


When the supply voltage is applied, the relay is open. When the START control contact is closed, the relay energizes and starts the delay time T. After the end of the timing relay opens and again runs delay time T. Upon completion timing again switches, and the sequence is repeated until the supply voltage is disconnected.

d. FLASHER - OFF first with Control Signal

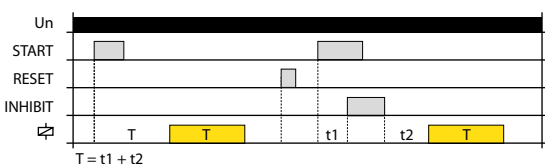


When the supply voltage is applied, the relay is open. When the START control contact is closed, starts the time delay T. After the end of the timing relay closes and again runs delay time T. After the end of the timing relay opens and the sequence is repeated until the supply voltage is disconnected.

e. OFF DELAY

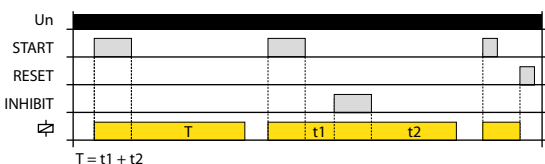


When the supply voltage is applied, the relay is open. If the control contact START is closed, the relay closes. After tripping Contact Start starts the delay time T. After the end of the timing relay is switched off.

f. SINGLE SHOT

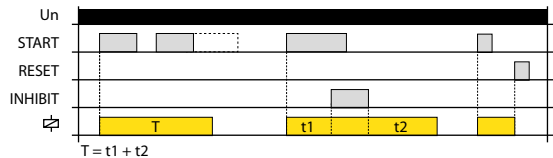


When the supply voltage is applied, the relay is open. When the START control contact is closed, the relay energizes and starts the delay time T. After the end of the timing relay is switched off. The closing of the START control contact during timing is ignored.

g. WATCHDOG

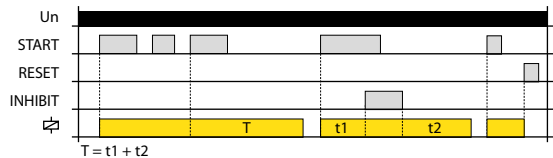


When the supply voltage is applied, the relay is open. When the START control contact is closed, the relay energizes and starts the delay time T. After the end of the timing relay is switched off. Closing control contact START during timing triggers a new time delay T - the relay closing time is thus increased.

h. PULSE GENERATOR 0.5 s with Control Signal

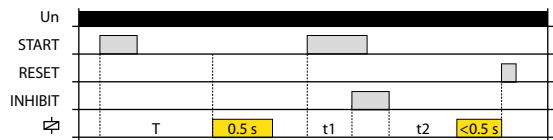


When the supply voltage is applied, the relay is open. When the START control contact is closed, starts the time delay T. After the end of the timing relay switches for the fixed time (0.5 sec).

i. INTERVAL ON/OFF

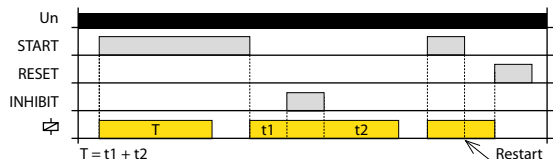


When the supply voltage is applied, the relay is open. When the START control contact is closed, the relay energizes and starts the delay time T. After the end of the timing relay is switched off. By opening the control contact start relay again closes and starts the delay time T. After the end of the timing relay is switched off.

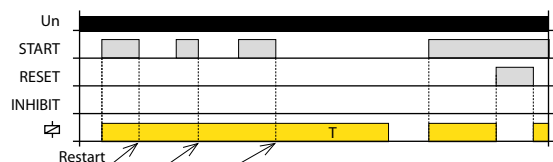


If the START control contact is open during timing, a restart occurs - the relay remains closed and a new time delay T begins. When the timing is complete, the relay opens.

j. ON/OFF DELAY

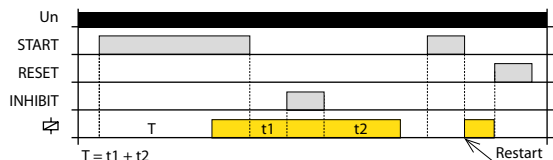

When the supply voltage is applied, the relay is open. When the START control contact is closed, starts the time delay T. After the end of the timing relay switches. Opening the control contact START starts a new time delay T. When the timing is complete, the relay opens.

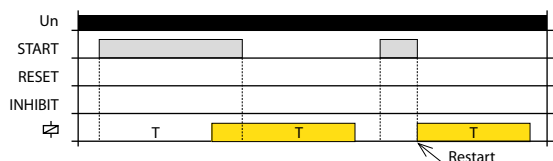




If the START control contact is open during timing, a restart occurs - the relay closes and a new time delay T begins. When the timing is complete, the relay opens.



EAN code
CRM-82TO/UNI: 8595188137614

Technical parameters		CRM-82TO
Number of functions:	a - TRUE OFF DELAY / e - ON DELAY	
Supply terminals:	A1 - A2	
Voltage range:	AC/DC 12 - 240 V (AC 50-60 Hz)	
Burden (max.):	3 VA / 1.7 W	
Max. dissipated power (Un + terminals):	2.5 W	
Supply voltage tolerance:	-15 %; +10 %	
Supply indication:	green LED	
Time ranges:	0.1 s - 10 min	
Time setting:	potentiometer	
Time deviation:	5 % - mechanical setting	
Repeat accuracy:	0.2 % - set value stability	
Temperature coefficient:	0.1 %/°C, at = 20 °C (0.1 %/°F, at = 68 °F)	
Output		
Number of contacts:	2x changeover/DPDT (AgNi/Silver Alloy)	
Current rating:	8 A/AC1; 1/2 HP 240 Vac; PD. B300	
Breaking capacity:	2000 VA/AC1, 192 W/DC	
Inrush current:	10 A/<3 s	
Switching voltage:	250 V AC/24 V DC	
Output indication:	red LED	
Mechanical life:	2.000.000 ops.	
Electrical life (AC1):	200.000 ops.	
Other information		
Operating temperature:	-20 .. 55 °C (-4 .. 131 °F)	
Storage temperature:	-30 .. 70 °C (-22 .. 158 °F)	
Dielectric strength:	4 kV (supply-output)	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Protection degree:	IP40 from front panel / IP10 terminals	
Overvoltage category:	III.	
Pollution degree:	2	
Max. cable size (mm²):	solid wire max. 2x 2.5 or 1x 4, with sleeve max. 2x 1.5 or 1x 2.5 (AWG 12)	
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")	
Weight:	73 g (2.6 oz.)	
Standards:	EN 61812-1	

- „TRUE OFF DELAY“ relay starts timing after power supply failure. Example of use case: back-up source for DELAY OFF in case power supply failure. (e.g. emergency lighting, emergency respirator, or protection of el. controlled doors - in case of fire).
- 2 time functions adjustable by rotary switch:
 - a - delayed return after disconnecting of supply
 - e - delayed start.
- Time range (adjustable by rotary switch and fine setting by potentiometer): 0.1 s - 10 min.
- Interruptions in the power supply must take time steps (tens to hundreds of milliseconds).
- Output status indicated by red LED (only in case of supply voltage connection).

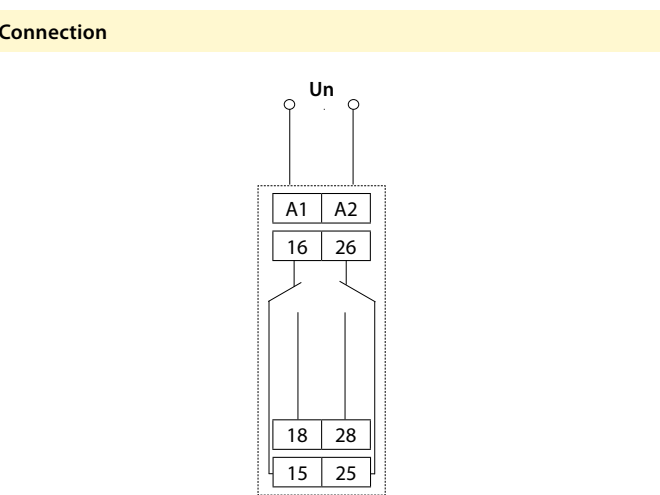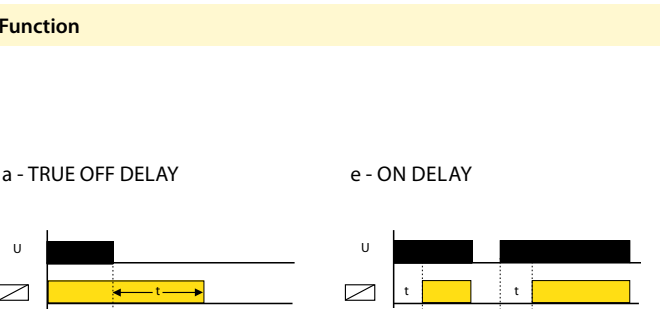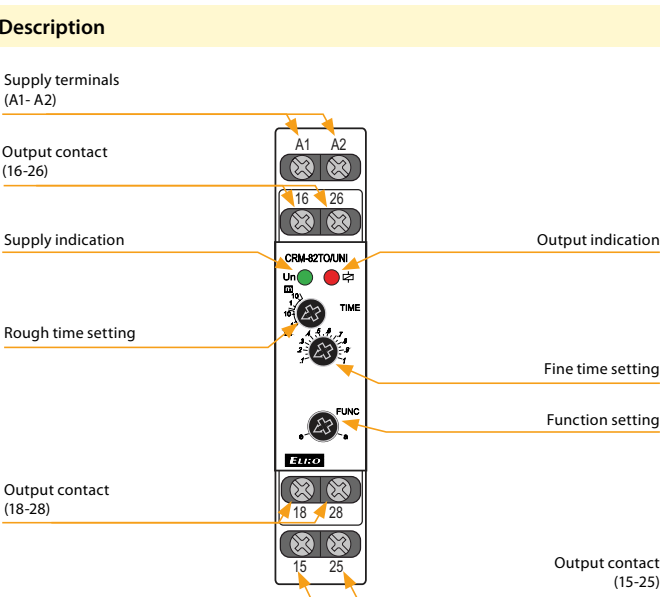



EAN code
CRM-2T/UNI: 8595188112437

Technical parameters

CRM-2T

Power supply

Supply terminals:	A1 - A2
Voltage range:	AC/DC 12 - 240 V (AC 50-60 Hz)
Power input (max.):	2 VA/1.5 W
Voltage range:	AC 230 V (50-60 Hz)
Power input (max.):	AC 3 VA/1.4 W
Supply voltage tolerance:	-15 %; +10 %
Supply indication:	green LED

Function

Time scale:	t1: 0.1 s - 100 days; t2: 0.1 s - 1 s
Time setting:	rotaty switch and potentiometer
Time deviation:	5% - mechanical setting
Repeat accuracy:	0.2 % - set value stability
Temperature coefficient:	0.01 %/°C, at = 20 °C (0.01 %/°F, at = 68 °F)

Output

Number of contacts:	2x changeover/SPDT (AgNi)
Current rating:	16 A/AC1; 1 HP 240 Vac, 1/2 HP 120 Vac; PD. B300
Breaking capacity:	4000 VA/AC1, 384 W/DC
Inrush current:	30 A/< 3 s
Switching voltage:	250 V AC/24 V DC
Max. power dissipation:	1.2 W
Output indication:	multifunction red LED
Mechanical life:	10.000.000 ops.
Electrical life (AC1):	100.000 ops.
Reset time:	max. 150 ms

Other information

Operating temperature:	-20 .. 55 °C (-4 .. 131 °F)
Storage temperature:	-30 .. 70 °C (-22 .. 158 °F)
Dielectric strength:	
supply - output 1	4 kV AC
supply - output 2	4 kV AC
output 1 - output 2	4 kV AC
Operating position:	any
Mounting:	DIN rail EN 60715
Protection degree:	IP40 from front panel/IP20 terminals
Overvoltage category:	III.
Pollution degree:	2
Terminal wire capacity (mm²):	max.1x 2.5, 2x1.5, with sleeve max. 1x 2.5 (AWG 12)
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")
Weight:	UNI - 78 g (2.8 oz.), 230 - 73 g (2.6 oz.)
Standards:	EN 61812-1

- It serves for delay ON of motors star/delta.

- Time t1 (star):


- time range setting by rotary switch
- fine time setting by potentiometer.

- Time t2 (delay) between λ/Δ

- fine time setting by potentiometer.


- Multifunction red LED flashes or shines depending on the operating status.

Description

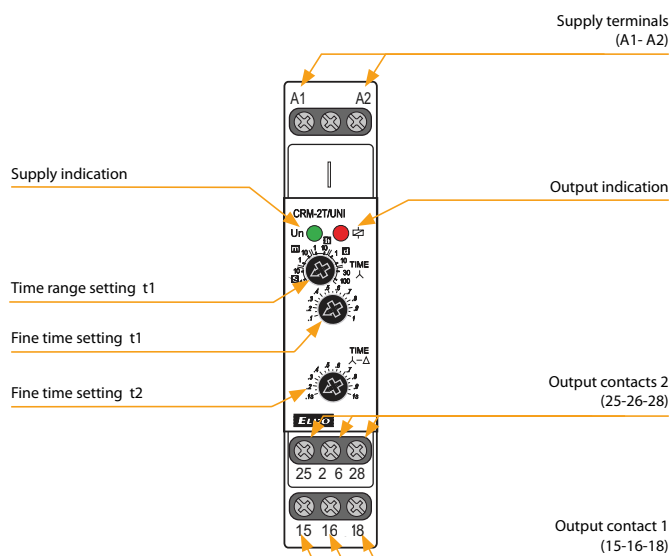



Function

STAR/DELTA timer

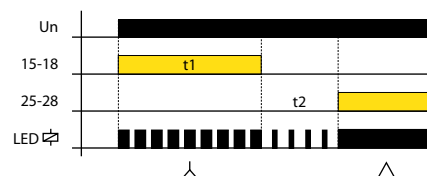


Connection

Start up of motor (λ - Δ)

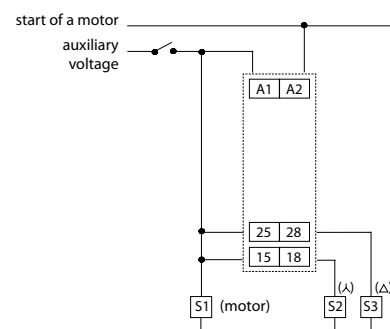

Symbol



CRM-181J, CRM-182J, CRM-183J | Singlefunction time relays




EAN code			
CRM-181J/UNI ZR: 8595188180382	CRM-182J/UNI ZR: 8595188176903	CRM-183J/UNI ZR: 8595188180610	
CRM-181J/UNI ZN: 8595188180399	CRM-182J/UNI ZN: 8595188176910	CRM-183J/UNI ZN: 8595188180603	
CRM-181J/UNI BL: 8595188180405	CRM-182J/UNI BL: 8595188176927	CRM-183J/UNI BL: 8595188180580	
CRM-181J/UNI OD: 8595188180412	CRM-182J/UNI OD: 8595188176934	CRM-183J/UNI OD: 8595188180597	

- Single function time relays are suitable for applications where there is a clear function requirement in advance and are suitable for universal use in automation, control and regulation or in house installations.
- Choice of four types: ZR, ZN, BL, OD.
- All functions initiated by the supply voltage can use the control input to inhibit the ongoing delay (pause).
- Multifunction red LED flashes or shines depending on the operating status.


Technical parameters		CRM-181J	CRM-182J	CRM-183J
Power supply				
Supply terminals:	A1 - A2			
Voltage range:	AC/DC 12 - 240 V (AC 50-60 Hz)			
Power input (max.):	2 VA/1.5 W	2.5 VA/1.5 W	2.5 VA/1.5 W	
Supply voltage tolerance:	-15 %; +10 %			
Supply indication:	green LED			
Time circuit				
Time ranges:	0.1 s - 100 h			
Time setting:	rotary switch and potentiometer			
Time deviation:	5 % - mechanical setting			
Repeat accuracy:	0.2 % - set value stability			
Temperature coefficient:	0.01%/°C, at = 20 °C (0.01 %/°F, at = 68°F)			
Output				
Output contact 1:	1x changeover/SPDT (AgNi)			
Current rating:	16 A/AC1; 1 HP 240 Vac, 1/2 HP 120 Vac; PD. B300			
Breaking capacity:	4000 VA/AC1, 384 W/DC1			
Electrical life (AC1):	100.000 ops.			
Output contact 2 (3):	x	1x chang./SPDT (AgNi)	2x chang./DPDT (AgNi)	
Current rating:	x	16 A/AC1; 1 HP 240 Vac, 1/2 HP 120 Vac; PD. B300	8 A/AC1; 1/2 HP 240Vac; PD. B300	
Breaking capacity:	x	4000 VA/AC1, 384 W/DC1	2000 VA/AC1, 192 W/DC1	
Electrical life (AC1):	x	100.000 ops.	50.000 ops.	
Switching voltage:	250 V AC/24 V DC			
Max. power dissipation:	1.2 W	2.4 W	2.4 W	
Mechanical life:	10.000.000 ops.			
Control				
Control terminals:	A1-S			
Load between S-A2:	Yes			
Impulse length:	min. 25 ms/max. unlimited			
Reset time:	max. 150 ms			
Other information				
Operating temperature:	-20 .. +55 °C (-4 .. 131 °F)			
Storage temperature:	-30 .. +70 °C (-22 .. 158 °F)			
Dielectric strength:				
supply - output 1	4 kV AC			
supply - output 2 (3)	x	4 kV AC	1 kV AC	
output 1 - output 2	x	4 kV AC	1 kV AC	
output 2 - output 3	x	x	1 kV AC	
Operating position:	any			
Mounting:	DIN rail EN 60715			
Protection degree:	IP40 front panel/IP20 terminals			
Overvoltage category:	III.			
Pollution degree:	2			
Max. cable size (mm²):	solid wire max. 1x 2.5 or 2x 1.5/ with sleeve max. 1x 2.5 (AWG 12)			
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")			
Weight:	61 g (2.2 oz)	84 g (3 oz)	84 g (3 oz)	
Standards:	EN 61812-1			

Description

CRM-183J

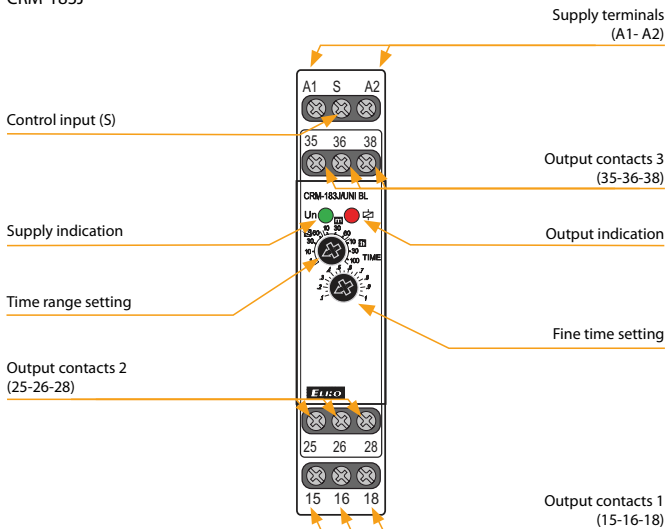


Connection

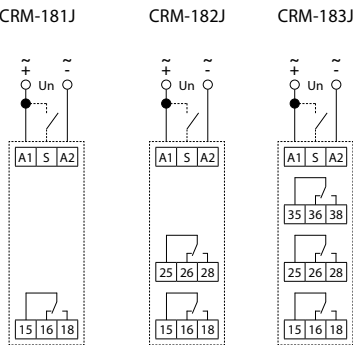



CRM-183J:
The potential difference between the supply terminals (A1-A2), output contact 2 (25-26-28) and output contact 3 (35-36-38) must be a maximum of 250 V AC rms/DC.

Possibility to connect load onto controlling input

It is possible to connect the load (e.g.: contactor) between terminals S-A2, without any interruption of correct relay function.




Indication of operating states

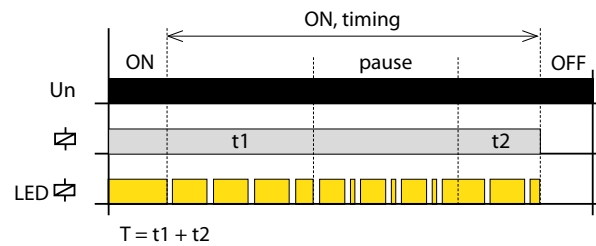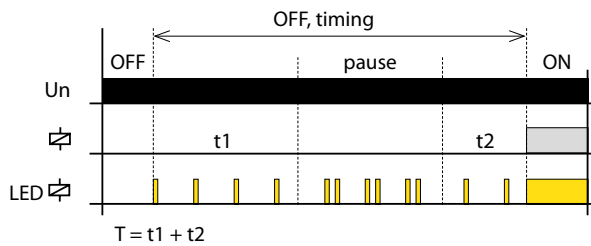


Function

ZR: ON DELAY




When the supply voltage is applied, the time delay T begins. When the timing is complete, the relay closes and this condition continues until the supply voltage is disconnected.

BL: FLASHER - ON first




If the control contact is closed and the supply voltage is connected, the relay will close and the timing will start only after the control contact has been opened. When the timing is complete, the relay opens.

ON DELAY with Inhibit



If the control contact is closed and the supply voltage is connected, the relay is opened and timing does not start until the control contact opens. When the timing is complete, the relay closes. If the control contact is closed during timing, the timing is interrupted and continues only after the control contact opens.

FLASHER - ON first with Inhibit



If the control contact is closed during an active timer setting, the timing is interrupted and continues only after the control contact opens again.

ZN: INTERVAL ON




After supply voltage relay closes and starts the delay time T . After the end of the timing relay opens and this state lasts until the supply voltage is disconnected.

OD: OFF DELAY



When the supply voltage is applied, the relay is open. When the control contact is closed, the relay closes. When the control contact opens, the time delay T begins. If the control contact is closed during timing, the time is reset and the relay remains closed. When the control contact opens, the time delay T starts again and opens when the relay closes.

INTERVAL ON with Inhibit



If the control contact is closed and the supply voltage is connected, the relay will close and the timing will start only after the control contact has been opened. When the timing is complete, the relay opens. If the control contact is closed during timing, the timing is interrupted and continues only after the control contact opens.

Note:


ZR, ZN and BL functions are initiated by connecting the supply voltage to the product, i.e. In the event of a failure and recovery of the supply voltage, the relay automatically performs 1 cycle.



EAN code
CRM-2H/UNI: 8595188113007


Technical parameters		CRM-2H
Power supply		
Supply terminals:	UNI 230	A1 - A2
Voltage range:		AC/DC 12 - 240 V (AC 50-60 Hz)
Power input (max.):		2 VA/1.5 W
Voltage range:		AC 230 V (50/60 Hz)
Power input (max.):		AC 3 VA/1.4 W
Supply voltage tolerance:		−15 %; +10 %
Supply indication:		green LED
Function		
Time scale:		0.1 s - 100 days
Time setting:		rotary switch and potentiometer
Time deviation:		5 % - mechanical setting
Repeat accuracy:		0.2 % - set value stability
Temperature coefficient:		0.01 %/°C, at = 20°C (0.01 %/°F, at = 68°F)
Output		
Number of contacts:		1x changeover/SPDT (AgNi)
Current rating:		16 A/AC1; 1 HP 240 Vac, 1/2 HP 120 Vac; PD. B300
Breaking capacity:		4000 VA/AC1, 384 W/DC
Inrush current:		30 A/< 3 s
Switching voltage:		250 V AC/24 V DC
Max. power dissipation:		1.2 W
Output indication:		multifunction red LED
Mechanical life:		10.000.000 ops.
Electrical life (AC1):		100.000 ops.
Reset time:		max. 150 ms
Other information		
Operating temperature:		−20 .. 55 °C (−4 .. 131 °F)
Storage temperature:		−30 .. 70 °C (−22 .. 158 °F)
Dielectric strength:		4 kV AC (supply - output)
Operating position:		any
Mounting:		DIN rail EN 60715
Protection degree:		IP40 from front panel/IP20 terminals
Overvoltage category:		III.
Pollution degree:		2
Terminal wire capacity (mm²):		solid wire max. 1x 2.5 or 2x 1.5/ with sleeve max. 1x 2.5 (AWG 12)
Dimensions:		90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")
Weight		UNI - 61 g (2.2 oz.), 230 - 58 g (2 oz.)
Standards:		EN 61812-1

Symbol




- Flasher with independent adjustable switch ON and switch OFF.
- Used for regular room ventilation, cyclic dehumidification, light control, circulating pumps, illuminated advertising, etc.
- 2 time functions:
 - Asymmetric FLASHER - ON first
 - Asymmetric FLASHER - OFF first
- Function choice is done by an external jumper of terminals S-A1.
- Time scale 0.1 s - 100 days divided into 10 time ranges.
- Time range setting via rotary switch.
- Fine time setting by potentiometer.
- Multifunction red LED flashes or shines depending on the operating status.


Description

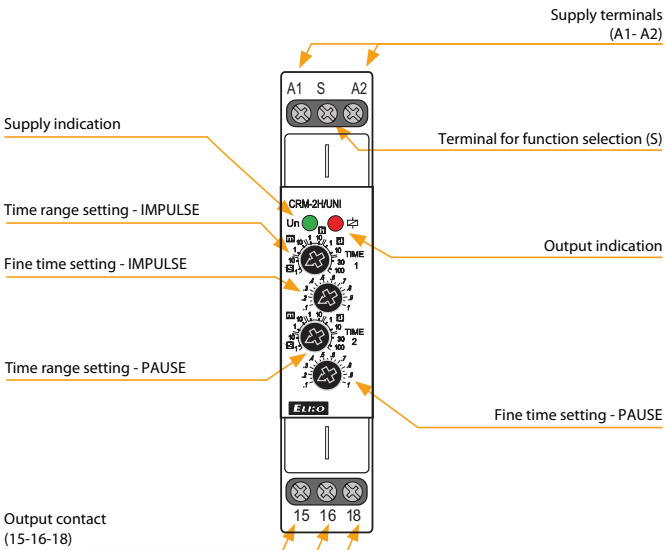

Connection

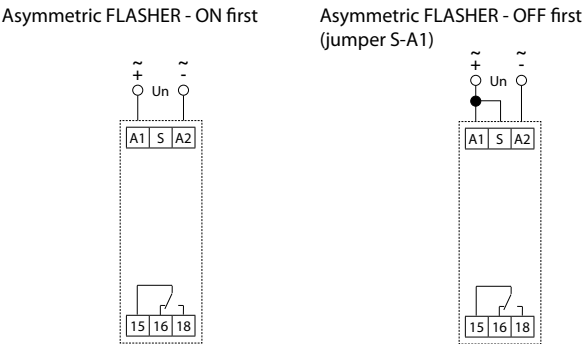

Function

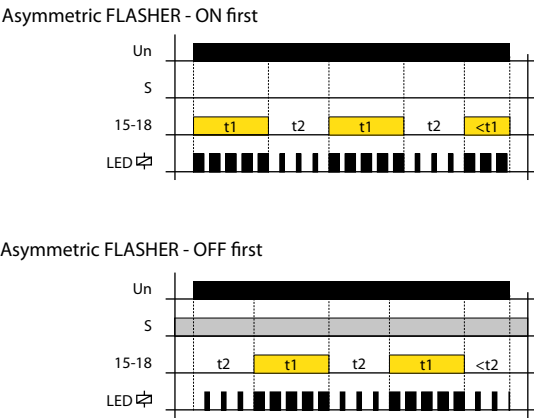




EAN code
PTRM-216TP/UNI: 8595188179386
PTRM-216KP/UNI: 8595188178617

Technical parameters	PTRM-216TP	PTRM-216KP
Power supply		
Power pins:	2, 10	
Voltage range:	AC/DC 12 – 240 V (AC 50-60 Hz)	
Power input (max.):	2.5 VA/1.5 W	
Supply voltage tolerance:	±10 %	
Supply indication:	green LED	
Time circuit		
Number of functions:	10	
Time ranges:	50 ms - 30 days	
Time setting:	rotary switch and potentiometer	
Time deviation:*	5 % - mechanical setting	
Repeat accuracy:	0.2 % - set value stability	
Temperature coefficient:	0.01 %/°C, at = 20 °C (0.01 %/°F, at = 68 °F)	
Output		
Number of contacts:	2x changeover/SPDT (AgNi)	
Current rating:	16 A/AC1; 1 HP 240 Vac, 1/2 HP 120 Vac; PD. B300	
Breaking capacity:	4000 VA/AC1, 384 W/DC	
Switching voltage:	250 V AC/24 V DC	
Max. power dissipation:	2.4 W	
Output indication:	multifunction red LED	
Mechanical life:	10.000.000 ops.	
Electrical life (AC1):	100.000 ops.	
Control		
Control pins:	5 (2) -6	
Impulse length:	min. 25 ms/max. unlimited	
Reset time:	max. 150 ms	
Other information		
Operating temperature:	−20 .. +55 °C (−4 .. 131 °F)	
Storage temperature:	−30 .. +70 °C (−22 .. 158 °F)	
Dielectric strength:		
supply - output 1 (1, 3, 4)	2.5 kV AC	
supply - output 2 (8, 9, 11)	2.5 kV AC	
output 1 - output 2	2.5 kV AC	
Operating position:	any	
Mounting:	11 pin octal socket	
Protection degree:	IP40 from front panel	
Overvoltage category:		
for supply voltage		
12-150 V AC/DC	III.	
for supply voltage		
150-240 V AC/DC	II.	
Pollution degree:	2	
Dimensions:	48x48x79mm (1.7" x1.7" x3.1")	48x48x89mm (1.7"x1.7"x3.5")
Weight:	111 g (3.9 oz.)	108 g (3.81 oz.)
Standards:	EN 61812-1	

* for adjustable delay <100 ms, a time deviation of ± 10 ms applies


- Multifunction time relay for universal use in automation, control and regulation or in house installations.
- Possibility to select the control element for fine time setting:
PTRM-216KP - knob, for easy handling without the need for tools
PTRM-216TP - rotary switch, for the possibility of using a sealable cover.
- All functions initiated by the supply voltage, except for the flasher function, can use the control input to inhibit the delay (pause).
- Mode selection - according to the set function, permanently closed, permanently open, and switching of the second output contact according to the supply voltage.
- Multifunction red LED flashes or shines depending on the operating status.

Description

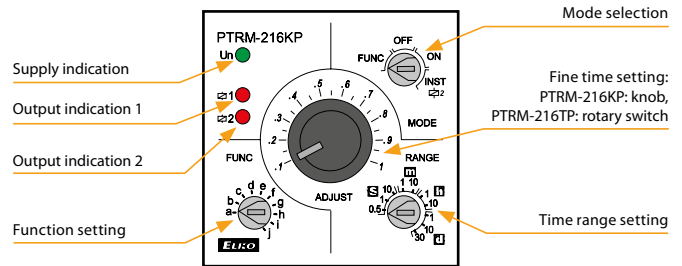

Connection

Indication of operating states

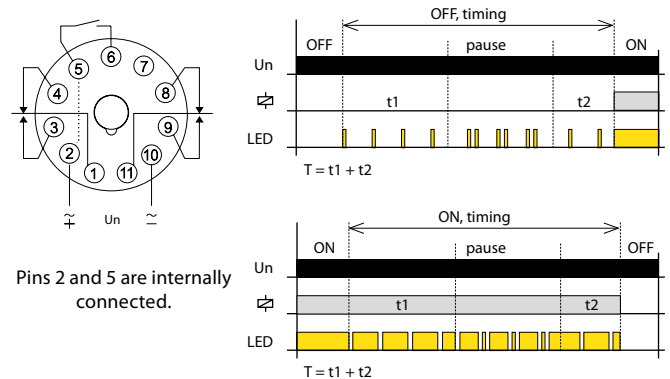

Mode selection

FUNC. Settings function mode

The desired function a-j is set with the FUNC rotary switch.

OFF. Output contact open mode



ON. Output contact closed mode



INST. Second output contact instantaneous



The second output contact switches according to the supply voltage. The first output contact switches according to the function (a-j) set by the trimmer FUNC.

Function

Functions (page 26).

PTRM-216TP, PTRM-216KP


Function

a. ON DELAY




When the supply voltage is applied, the time delay T begins. When the timing is complete, the relay closes and this condition continues until the supply voltage is disconnected.

ON DELAY with Inhibit




If the control contact is closed and the supply voltage is connected, the relay is opened and timing does not start until the control contact opens. When the timing is complete, the relay closes. If the control contact is closed during timing, the timing is interrupted and continues only after the control contact opens.

b. INTERVAL ON




After supply voltage relay closes and starts the delay time T. After the end of the timing relay opens and this state lasts until the supply voltage is disconnected.

INTERVAL ON with Inhibit




If the control contact is closed and the supply voltage is connected, the relay will close and the timing will start only after the control contact has been opened. When the timing is complete, the relay opens. If the control contact is closed during timing, the timing is interrupted and continues only after the control contact opens.

c. FLASHER - ON first



After supply voltage relay closes and starts the delay time T. After the end of the timing relay opens and again runs delay time T. When the timing is complete, the relay closes again and the sequence is repeated until the supply voltage is disconnected. If the control contact is closed during timing, this does not affect the operation of the cycler.

FLASHER - OFF first




If the control contact is closed during timing; this does not affect the operation of the cycler. If the control contact is closed and the supply voltage is connected, the cycler starts with a pause (relay open).

d. MEMORY LATCH




When the supply voltage is applied, the relay is open. When the control contact is closed, the relay closes. The status does not change when the control contact is opened. When the control contact is closed again, the relay opens. Each time the control contact is closed, the relay changes status.

e. OFF DELAY




When the supply voltage is applied, the relay is open. When the control contact is closed, the relay closes. When the control contact opens, the time delay T begins. If the control contact is closed during timing, the time is reset and the relay remains closed. When the control contact opens, the time delay T starts again and opens when the relay closes.

f. SINGLE SHOT




When the supply voltage is applied, the relay is open. When the control contact is closed, the relay closes and the time delay T begins. Closing the control contact during timing is ignored.

g. WATCHDOG




When the supply voltage is applied, the relay is open. When the control contact is closed, the relay closes and the time delay T begins. Closing the control contact during timing triggers a new time delay T - the relay closing time is thus increased.

h. PULSE GENERATOR 0.5 s




After the supply voltage has been applied, the time delay T begins. When the timing is complete, the relay closes for a fixed time (0.5 s).

PULSE GENERATOR 0.5 s with Inhibit




After supply voltage starts the time delay T. By closing timing of the control contact during timing is suspended. When the control contact opens, the time interval is completed and the relay closes for a fixed time (0.5 s).

i. INTERVAL ON/OFF

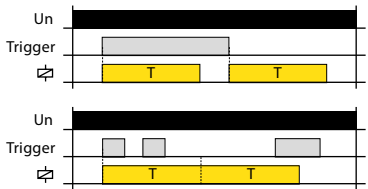

When the supply voltage is applied, the relay is open. When the control contact is closed, the relay closes and the time delay T begins. When the control contact is opened, the relay closes and the time delay T begins. If the control contact is open during timing, the relay remains closed for 2T. When the timing is complete, the relay opens. Any other change of control contact status during timing is ignored.

j. ON/OFF DELAY

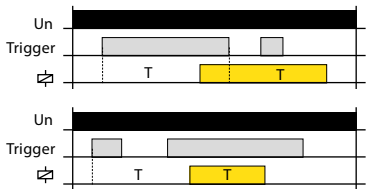

When the supply voltage is applied, the relay is open. If control contact is closed, time delay T starts. When the control contact is opened, a new time delay T begins. If the control contact is open during timing, the relay closes at the end of the timing and opens the relay after the new time delay. Any other change of control contact status during timing is ignored.




EAN code
PTRM-216T/UNI: 8595188175586
PTRM-216K/UNI: 8595188175579

Technical parameters	PTRM-216T	PTRM-216K
Power supply		
Power pins:	2, 10	
Voltage range:	AC/DC 12 – 240 V (AC 50-60 Hz)	
Power input (max.):	2.5 VA/1.5 W	
Supply voltage tolerance:	±10 %	
Supply indication:	green LED	
Time circuit		
Number of functions:	10	
Time ranges:	50 ms - 30 days	
Time setting:	rotary switch and potentiometer	
Time deviation*:	5 % - mechanical setting	
Repeat accuracy:	0.2 % - set value stability	
Temperature coefficient:	0.01 %/°C, at = 20 °C (0.01 %/°F, at = 68 °F)	
Output		
Number of contacts:	2x changeover/SPDT (AgNi)	
Current rating:	16 A/AC1; 1 HP 240 Vac, 1/2 HP 120 Vac; PD. B300	
Breaking capacity:	4000 VA/AC1, 384 W/DC	
Switching voltage:	250 V AC/24 V DC	
Max. power dissipation:	2.4 W	
Output indication:	multifunction red LED	
Mechanical life:	10.000.000 ops.	
Electrical life (AC1):	100.000 ops.	
Control		
Control pins:	5 - 6	
Impulse length:	min. 25 ms/max. unlimited	
Reset time:	max. 150 ms	
Other information		
Operating temperature:	−20 .. +55 °C (−4 ..131 °F)	
Storage temperature:	−30 .. +70 °C (−22 .. 158 °F)	
Dielectric strength:		
supply - output 1 (1, 3, 4)	2.5 kV AC	
supply - output 2 (8, 9, 11)	2.5 kV AC	
output 1 - output 2	2.5 kV AC	
Operating position:	any	
Mounting:	11 pin octal socket	
Protection degree:	IP40 from front panel	
Overvoltage category:		
for supply voltage 12-150V AC/DC	III.	
for supply voltage 150-240V AC/DC	II.	
Pollution degree:	2	
Dimensions:	48x48x79mm (1.7"x1.7"x3.1")	48x48x89mm (1.7"x1.7"x3.5")
Weight:	111 g (3.9 oz.)	108 g (3.81 oz.)
Standards:	EN 61812-1	


* for adjustable delay <100 ms, a time deviation of ± 10 ms applies

- Multifunction time relay for universal use in automation, control and regulation or in house installations.
- Potential-free control input (Control Switch Trigger).
- Possibility to select the control element for fine time setting:
- **PTRM-216K** - knob, for easy handling without the need for tools.
- **PTRM-216T** - rotary switch, for the possibility of using a sealable cover.
- All functions initiated by the supply voltage, except for the flasher function, can use the control input to inhibit the delay (pause).
- Mode selection - according to the set function, permanently closed, permanently open, and switching of the second output contact according to the supply voltage.
- Multifunction red LED flashes or shines depending on the operating status.

Description

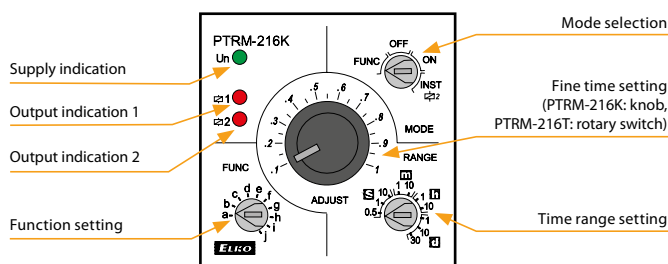


Connection



Do not apply voltage to terminals 5, 6, 7!

Indication of operating states

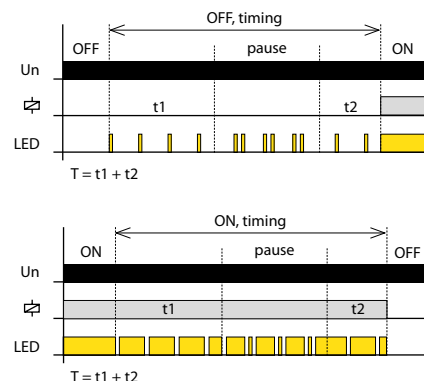

Mode selection

FUNC. Settings function mode

The desired function a-j is set with the FUNC rotary switch.

OFF. Output contact open mode



ON. Output contact closed mode



INST. Second output contact instantaneous



The second output contact switches according to the supply voltage. The first output contact switches according to the function (a-j) set by the trimmer FUNC.


Function

Functions (page 28).

PTRM-216T, PTRM-216K


Function

a. ON DELAY



When the supply voltage is applied, the time delay T begins. When the timing is complete, the relay closes and this condition continues until the supply voltage is disconnected.

ON DELAY with Inhibit




If the control contact is closed and the supply voltage is connected, the relay is opened and timing does not start until the control contact opens. When the timing is complete, the relay closes. If the control contact is closed during timing, the timing is interrupted and continues only after the control contact opens.

b. INTERVAL ON



After supply voltage relay closes and starts the delay time T. After the end of the timing relay opens and this state lasts until the supply voltage is disconnected.

INTERVAL ON with Inhibit




If the control contact is closed and the supply voltage is connected, the relay will close and the timing will start only after the control contact has been opened. When the timing is complete, the relay opens. If the control contact is closed during timing, the timing is interrupted and continues only after the control contact opens.

c. FLASHER - ON first



After supply voltage relay closes and starts the delay time T. After the end of the timing relay opens and again runs delay time T. When the timing is complete, the relay closes again and the sequence is repeated until the supply voltage is disconnected. If the control contact is closed during timing, this does not affect the operation of the cyclor.

FLASHER - OFF first




If the control contact is closed during timing; this does not affect the operation of the cyclor. If the control contact is closed and the supply voltage is connected, the cyclor starts with a pause (relay open).

d. MEMORY LATCH




When the supply voltage is applied, the relay is open. When the control contact is closed, the relay closes. The status does not change when the control contact is opened. When the control contact is closed again, the relay opens. Each time the control contact is closed, the relay changes status.

e. OFF DELAY



When the supply voltage is applied, the relay is open. When the control contact is closed, the relay closes. When the control contact opens, the time delay T begins. If the control contact is closed during timing, the time is reset and the relay remains closed. When the control contact opens, the time delay T starts again and opens when the relay closes.

f. SINGLE SHOT




When the supply voltage is applied, the relay is open. When the control contact is closed, the relay closes and the time delay T begins. Closing the control contact during timing is ignored.

g. WATCHDOG




When the supply voltage is applied, the relay is open. When the control contact is closed, the relay closes and the time delay T begins. Closing the control contact during timing triggers a new time delay T - the relay closing time is thus increased.

h. PULSE GENERATOR 0.5 s




After the supply voltage has been applied, the time delay T begins. When the timing is complete, the relay closes for a fixed time (0.5 s).

PULSE GENERATOR 0.5 s with Inhibit




After supply voltage starts the time delay T. By closing timing of the control contact during timing is suspended. When the control contact opens, the time interval is completed and the relay closes for a fixed time (0.5 s).

i. INTERVAL ON/OFF

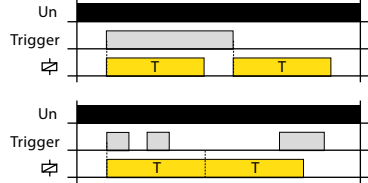

When the supply voltage is applied, the relay is open. When the control contact is closed, the relay closes and the time delay T begins. When the control contact is opened, the relay closes and the time delay T begins. If the control contact is open during timing, the relay remains closed for 2T. When the timing is complete, the relay opens. Any other change of control contact status during timing is ignored.

j. ON/OFF DELAY

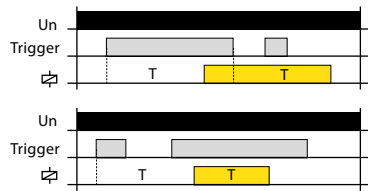

When the supply voltage is applied, the relay is open. If control contact is closed, time delay T starts. When the control contact is opened, a new time delay T begins. If the control contact is open during timing, the relay closes at the end of the timing and opens the relay after the new time delay. Any other change of control contact status during timing is ignored.



EAN code
 PTRA-216T/UNI: 8595188175609
 PTRA-216K/UNI: 8595188175593

Technical parameters	PTRA-216T	PTRA-216K
Power supply		
Power pins:	2, 10	
Voltage range:	AC/DC 12 – 240 V (AC 50-60 Hz)	
Power input (max.):	2.5 VA/1.5 W	
Supply voltage tolerance:	±10 %	
Supply indication:	green LED	
Time circuit		
Number of functions:	10	
Time ranges:	50 ms - 30 days	
Time setting:	rotary switch and potentiometer	
Time deviation*:	5 % - mechanical setting	
Repeat accuracy:	0.2 % - set value stability	
Temperature coefficient:	0.01 %/°C, at = 20 °C (0.01 %/°F, at = 68 °F)	
Output		
Number of contacts:	2x changeover/SPDT (AgNi)	
Current rating:	16 A/AC1; 1 HP 240 Vac, 1/2 HP 120 Vac; PD. B300	
Breaking capacity:	4000 VA/AC1, 384 W/DC	
Switching voltage:	250 V AC/24 V DC	
Max. power dissipation:	2.4 W	
Output indication:	multifunction red LED	
Mechanical life:	10.000.000 ops.	
Electrical life (AC1):	100.000 ops.	
Control		
Control pins:	5 - 2, 6 - 2, 7 - 2	
Impulse length:	min. 25 ms/max. unlimited	
Reset time:	max. 150 ms	
Other information		
Operating temperature:	−20 .. +55 °C (−4 .. 131 °F)	
Storage temperature:	−30 .. +70 °C (−22 .. 158 °F)	
Dielectric strength:		
supply - output 1 (1, 3, 4)	2.5 kV AC	
supply - output 2 (8, 9, 11)	2.5 kV AC	
output 1 - output 2	2.5 kV AC	
Operating position:	any	
Mounting:	11 pin octal socket	
Protection degree:	IP40 from front panel	
Overvoltage category:		
for supply voltage 12-150V AC/DC	III.	
for supply voltage 150-240V AC/DC	II.	
Pollution degree:	2	
Dimensions:	48x48x79mm (1.7"x1.7"x3.1")	48x48x89mm (1.7"x1.7"x3.5")
Weight:	111 g (3.9 oz.)	108 g (3.81 oz.)
Standards:	EN 61812-1	


* for adjustable delay <100 ms, a time deviation of ± 10 ms applies

Function


Functions (page 30).

- Multifunction time relay for universal use in automation, control and regulation or in house installations.
- Three control inputs - START, INHIBIT, RESET.
- Possibility to select the control element for fine time setting:
PTRA-216K - knob, for easy handling without the need for tools
PTRA-216T - rotary switch, for the possibility of using a sealable cover.
- Mode selection - according to the set function, permanently closed, permanently open, and switching of the second output contact according to the supply voltage.
- Multifunction red LED flashes or shines depending on the operating status.


Description

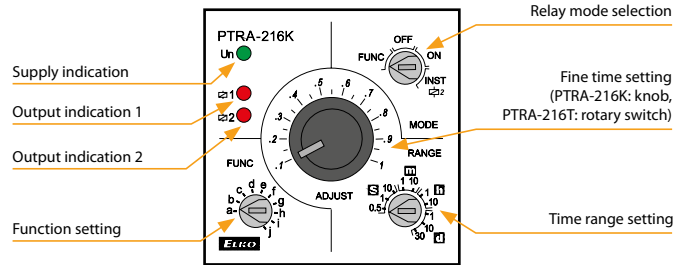

Connection



Indication of operating states

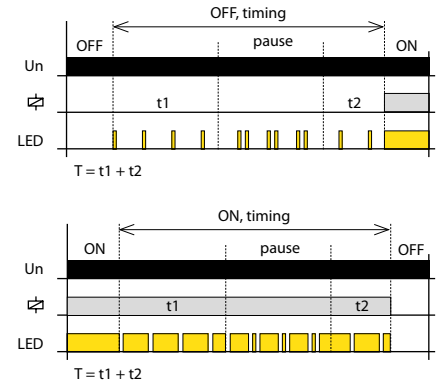

Mode selection

FUNC. Settings function mode

The desired function a-j is set with the FUNC rotary switch.

OFF. Output contact open mode



ON. Output contact closed mode



2 INST. Second output contact instantaneous



The second output contact switches according to the supply voltage. The first output contact switches according to the function (a-j) set by the trimmer FUNC.


PTRA-216T, PTRA-216K

Function

- Control input function description:
- Contact START starts the time function
 - INHIBIT contact pauses timing (pause)
 - The RESET contact simulates switching the supply voltage on and off


- Same for all features:
- If the control contact START is closed and the supply voltage is connected, the time function is activated when the supply voltage is connected.
 - Closing the control contact INHIBIT pauses the timing, after opening the control contact INHIBIT timing continues from the moment of interruption.
 - If the INHIBIT control contact is closed, the START control contact is activated and the timing is paused.
 - Closing the control contact RESET immediately terminates the timing and the relay opens, just as when the supply voltage is disconnected.
 - If the control contact RESET is closed and then the control contact START is closed, the time function is activated when the control contact RESET is opened as well as when the supply voltage is connected.

a. ON DELAY with Control Signal

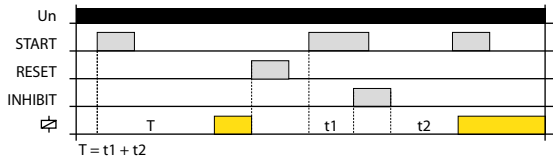


When the supply voltage is applied, the relay is open. If the control contact START is closed, the time delay T starts. The closing of the START control contact during timing is ignored.

b. INTERVAL ON with Control Signal

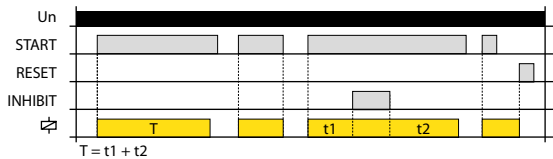


When the supply voltage is applied, the relay is open. When the control contact START is closed, the relay closes and the time delay T begins. If the START control contact is open during timing, the time interval is immediately terminated and the relay opens.

c. FLASHER - ON first with Control Signal

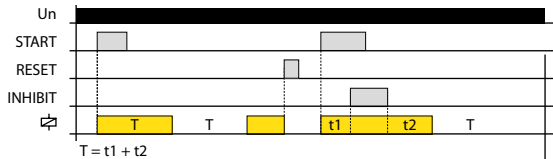


When the supply voltage is applied, the relay is open. When the START control contact is closed, the relay energizes and starts the delay time T. After the end of the timing relay opens and again runs delay time T. Upon completion timing again switches, and the sequence is repeated until the supply voltage is disconnected.

d. FLASHER - OFF first with Control Signal

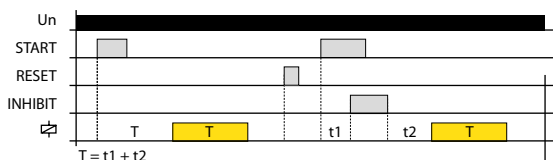


When the supply voltage is applied, the relay is open. When the START control contact is closed, starts the time delay T. After the end of the timing relay closes and again runs delay time T. After the end of the timing relay opens and the sequence is repeated until the supply voltage is disconnected.

e. OFF DELAY

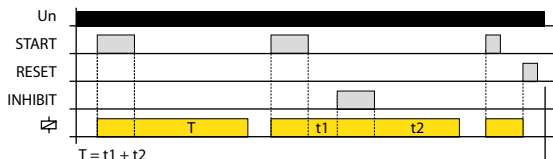


When the supply voltage is applied, the relay is open. If the control contact START is closed, the relay closes. After tripping Contact Start starts the delay time T. After the end of the timing relay is switched off.

f. SINGLE SHOT

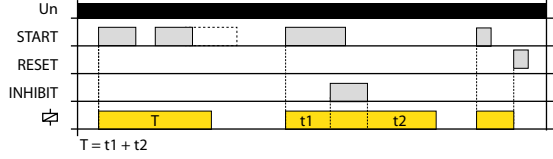


When the supply voltage is applied, the relay is open. When the START control contact is closed, the relay energizes and starts the delay time T. After the end of the timing relay is switched off. The closing of the START control contact during timing is ignored.

g. WATCHDOG

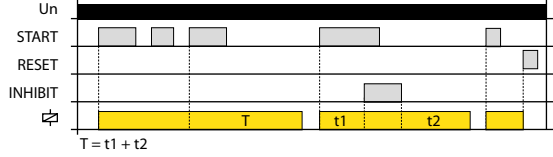


When the supply voltage is applied, the relay is open. When the START control contact is closed, the relay energizes and starts the delay time T. After the end of the timing relay is switched off. Closing control contact START during timing triggers a new time delay T - the relay closing time is thus increased.

h. PULSE GENERATOR 0.5 s with Control Signal

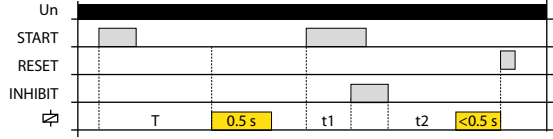


When the supply voltage is applied, the relay is open. When the START control contact is closed, starts the time delay T. After the end of the timing relay switches for the fixed time (0.5 sec).

i. INTERVAL ON/OFF

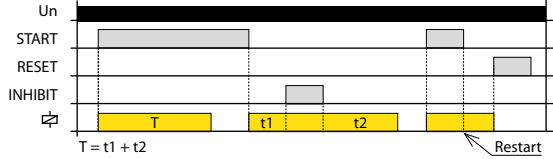


When the supply voltage is applied, the relay is open. When the START control contact is closed, the relay energizes and starts the delay time T. After the end of the timing relay is switched off. By opening the control contact start relay again closes and starts the delay time T. After the end of the timing relay is switched off.

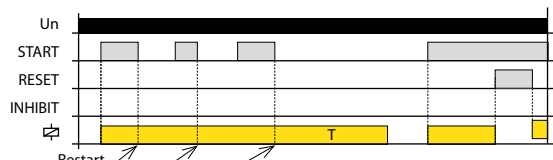


If the START control contact is open during timing, a restart occurs - the relay remains closed and a new time delay T begins. When the timing is complete, the relay opens.

j. ON/OFF DELAY

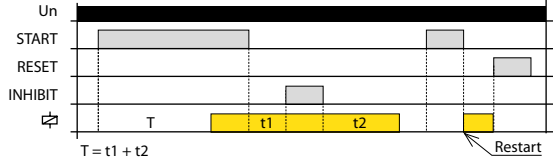

When the supply voltage is applied, the relay is open. When the START control contact is closed, starts the time delay T. After the end of the timing relay switches. Opening the control contact START starts a new time delay T. When the timing is complete, the relay opens.

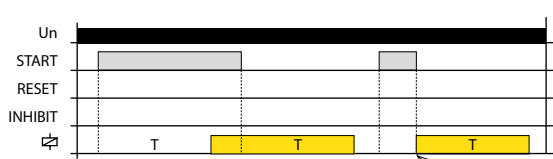

If the START control contact is open during timing, a restart occurs - the relay closes and a new time delay T begins. When the timing is complete, the relay opens.

1-phase

AC/DC



HRN-31, HRN-31/2
Multifunction, supply and monitored voltage in range of AC/DC 48-276 V, 1x (HRN-31) / 2x (HRN-31/2) output for U_{max} and U_{min} with adjustable levels.
page 33



HRN-32/2
As HRN-31/2 but individual output for each level (U_{max}/U_{min}).
page 33



HRN-39, HRN-39/2
Multifunction, supply and monitored voltage in range of AC/DC 24-150 V, 1x (HRN-39) / 2x (HRN-39/2) output for U_{max} and U_{min} with adjustable levels.
page 33



PMR1-31, PMR1-31/2
Same as HRN-31 and HRN-31/2, but in PLUG-IN design.
page 35



PMR1-39, PMR1-39/2
Same as HRN-39 and HRN-39/2, but in PLUG-IN design.
page 35

DC



HRN-36, HRN-36/2
Multifunction, supply and monitored voltage in range of DC 6-30 V, 1x (HRN-36) / 2x (HRN-36/2) output for U_{max} and U_{min} with adjustable levels.
page 33



PMR1-36, PMR1-36/2
Same as HRN-36 and HRN-36/2, but in PLUG-IN design.
page 35



HRN-56/208
Adjustable level U_{min}.
page 37



HRN-56/240
Adjustable level U_{min}.
page 37



HRN-56/400
Adjustable level U_{min}.
page 37



HRN-56/480
Adjustable level U_{min}.
page 37



HRN-56/575
Adjustable level U_{min}.
page 37



HRN3-81
Fixed range (208-480 V), asymmetry (2-10 % +OFF), 1x output contact, TRUE RMS.
page 40



HRN3-70
Adjustable range (190-500 V), asymmetry (2-10 % +OFF), undervoltage (80-95 % from the range), restart delay (1-300 s), selectable memory, 2x output contact, TRUE RMS.
page 38



PMR3-70
Same as HRN3-70, but in PLUG-IN design and with 1x output contact.
page 38



HRN3-80
Adjustable range (208-480 V), asymmetry (2-10 % +OFF), undervoltage (80-95 % from the range), 1x output contact, TRUE RMS.
page 40

MONITORING RELAY - VOLTAGE, SPECIAL

Type	Design	Supply from	Galvanically isolated	Features				Phase			Setting				Description	Page	
				Phases	Monitored range	>U	<U	≥U	Failure	Sequence	Asymmetry	Delay	Restart delay	Hysteresis			Memory
HRN-31 HRN-31/2	1-M	monitored voltage	x	1	AC/DC 48 - 276 V	●	●	●	x	x	x	●	x	●	All types have 9 functions in total. The delay is adjustable from 0 - 10 seconds (to eliminate short-term outages or peaks). The lower voltage level (Umin) is set in % of the upper level (Umax). HRN-3x, PMR1-3x: 1x output contact HRN-3x/2, PMR1-3x/2: 2x output contact	33	
HRN-32/2	1-M	monitored voltage	x	1	AC/DC 48 - 276 V	●	●	●	x	x	x	●	x	●			●
HRN-36 HRN-36/2	1-M	monitored voltage	x	1	DC 6 - 30 V	●	●	●	x	x	x	●	x	●			●
HRN-39 HRN-39/2	1-M	monitored voltage	x	1	AC/DC 24 - 150 V	●	●	●	x	x	x	●	x	●			●
PMR1-31 PMR1-31/2	8-PIN	monitored voltage	x	1	AC/DC 48 - 276 V	●	●	●	x	x	x	●	x	●	●	Old types replacement: HRN-33 > HRN-31 HRN-34 > HRN-36 HRN-35 > HRN-32/2 HRN-37 > HRN-39 HRN-32/2: separated output contact for overvoltage and undervoltage	47
PMR1-36 PMR1-36/2	8-PIN	monitored voltage	x	1	DC 6 - 30 V	●	●	●	x	x	x	●	x	●	●		
PMR1-39 PMR1-39/2	8-PIN	monitored voltage	x	1	AC/DC 24 - 150 V	●	●	●	x	x	x	●	x	●	●		
HRN-56/208 HRN-56/240 HRN-56/400	1-M	monitored voltage	x	3	AC 3 x 125 - 276 V AC 3 x 144 - 276 V AC 3 x 240 - 460 V	x	●	x	●	●	x	●	x	x	x	Thanks to the power supply from all three phases, the relay isoperational even if one phase fails.	37
HRN-56/480 HRN-56/575	3-M	monitored voltage	x	3	AC 3 x 228 - 550 V AC 3 x 345 - 660 V	x	●	x	●	●	x	●	x	x	x		
HRN3-70	3-M	monitored voltage	x	3	AC 3 x 190 - 500 V	x	x	● (fixed)	●	●	● (+ OFF)	●	●	x	●	Selectable nominal voltage from 190 to 500 V. Adjustable restart delay from 1 to 300 s. Two output contacts, changeover 16 A. * (o-fixed) = over voltage value is fixed (110% from selected range).	38
PMR3-70	3-M	monitored voltage	x	3	AC 3 x 190 - 500 V	x	x	● (fixed)	●	●	● (+ OFF)	●	●	x	●		
HRN3-80	1-M	monitored voltage	x	3	AC 3 x 208 - 480 V	x	●	x	●	●	● (+ OFF)	●	x	x	x	Selectable nominal voltage from 208 to 480 V.	40
HRN3-81	1-M	monitored voltage	x	3	AC 3 x 208 - 480 V	x	x	x	●	●	● (+ OFF)	●	x	x	x	Works in range from 208 to 480 V.	40




EAN code
 HRN-31: 8595188184946
 HRN-31/2: 8595188184380
 HRN-32/2: 8595188185394
 HRN-36: 8595188184953
 HRN-36/2: 8595188182553
 HRN-39: 8595188184960
 HRN-39/2: 8595188184939

Technical parameters	HRN-31 HRN-31/2	- HRN-32/2	HRN-36 HRN-36/2	HRN-39 HRN-39/2
Supply and measuring				
Supply/monitored terminals:	A1-A2			
Supply/monitored voltage:	AC/DC 48 – 276 V (AC 50-60 Hz)	AC/DC 48 – 276 V (AC 50-60 Hz)	DC 6 – 30 V -	AC/DC 24 – 150 V (AC 50-60 Hz)
Consumption (max.):	2.5 VA/0.55 W 2.7 VA/0.65 W	- 2.7 VA/0.65 W	0.35 W 0.5 W	2.5 VA/0.55 W 2.7 VA/0.65 W
Upper level setting (Umax):	AC/DC 160 – 276 V	AC/DC 160 – 276 V	DC 12 – 30 V	AC/DC 80 – 150 V
Lower level setting (Umin):	30 – 95 %Umax	30 – 95 %Umax	50 – 95 %Umax	30 – 95 %Umax
Max. permanent voltage:	AC/DC 276 V	AC/DC 276 V	DC 36 V	AC/DC 276 V
Peak overload (1 s):	AC/DC 290 V	AC/DC 290 V	DC 48 V	AC/DC 290 V
Time delay (d):	300 ms			
Time delay (t):	adjustable, 0.5 – 10 s			
Accuracy				
Setting accuracy (mech.):	5 % – mechanical setting			
Repeat accuracy:	< 1 %			
Temperature dependency:	< 0.1 %/°C (°F)			
Hysteresis	5 % (functions O1, U1, W)			
(fault to OK):	Umax – Umin (functions O2, U2, U3)			
Output				
Contact type:	1× changeover 2× changeover	1× changeover for each level	1× changeover 2× changeover	1× changeover 2× changeover
Contact material:	AgNi			
Current rating:	16 A/AC1; 1 HP 240 Vac, 1/2 HP 120 Vac; PD. B300			
Breaking capacity:	4000 VA/AC1, 384 W/DC1			
Switching voltage:	250 V AC/24 V DC			
Power dissipation (max.):	HRN-3x (1.2 W) HRN-3x/2 (2.4 W)			
Mechanical life:	10.000.000 ops.			
Electrical life (AC1):	100.000 ops.			
Other information				
Operating temperature:	–20 .. +55 °C (–4 .. 131 °F)			
Storage temperature:	–30 .. +70 °C (–22 .. 158 °F)			
Dielectric strength:	AC 4 kV (supply – output)			
Operating position:	any			
Mounting:	DIN rail EN 60715			
Protection degree:	IP40 front panel / IP20 terminals			
Overvoltage category:	III.			
Pollution degree:	2			
Cross-wire section – solid/ stranded with ferrule (mm²):	max. 1× 2.5, 2× 1.5/ max. 1× 2.5 (AWG 14)			
Dimensions:	90 × 17.6 × 64 mm (3.5" × 0.7" × 2.5")			
Weight:	60 g (2.11 oz) 77 g (2.72 oz)	- 77 g (2.72 oz)	60 g (2.11 oz) 77 g (2.72 oz)	60 g (2.11 oz) 77 g (2.72 oz)
Standards:	EN 60255-1, EN 60255-26, EN 60255-27			


- It is used to monitor the value of alternating or direct voltage in 1-phase circuits.
- Supply voltage from monitored voltage.
- Monitors voltage exceeding the upper voltage level (Umax) and falling below the lower voltage level (Umin) – according to the selected function.
- Smooth adjustment of both voltage levels – the lower level Umin is set in % of the upper level Umax.
- Adjustable time delay (to eliminate short-term voltage drops and spikes).
- Option to select functions with fault state memory (Latch).
- The fault state memory can be reseted by the control input (R).
- Measures true root mean square value of the voltage - TRUE RMS.
- Type HRN-32/2 has an independent output contact for each voltage level.

Description


HRN-31/2

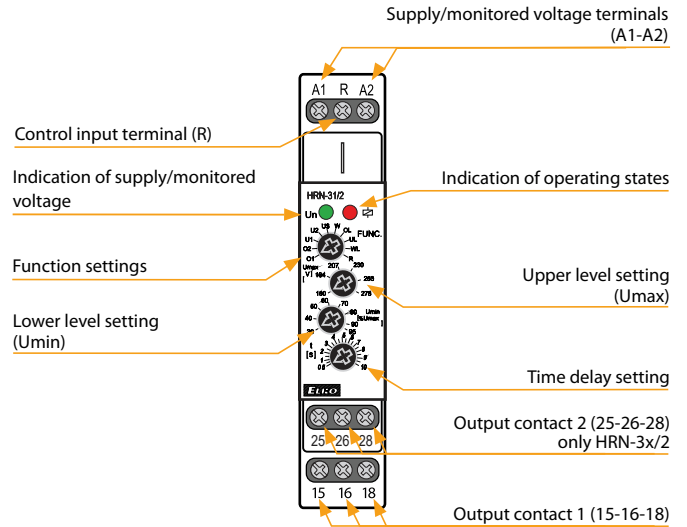

Connection

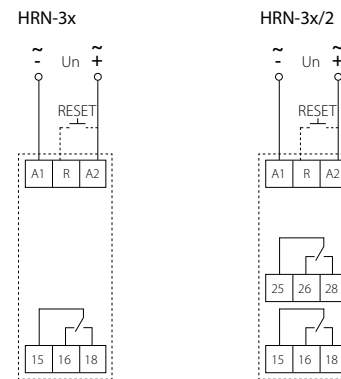


Indication of operating states

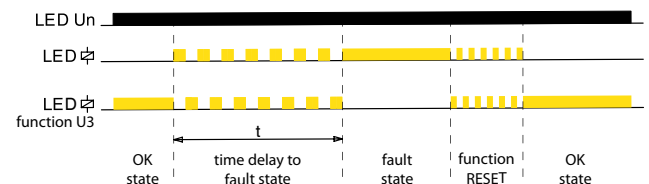


Function


01 OVER (hysteresis 5%)

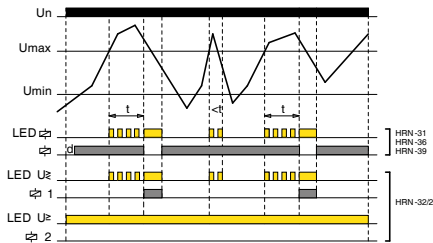


U1 UNDER (hysteresis 5%)

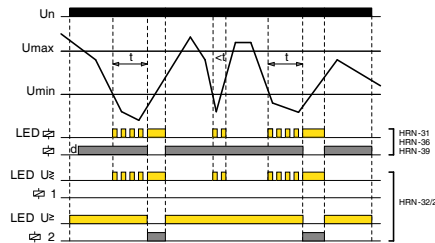


UL UNDER + Latch

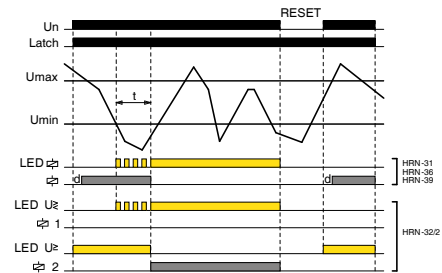


02 OVER (hysteresis to Umin)

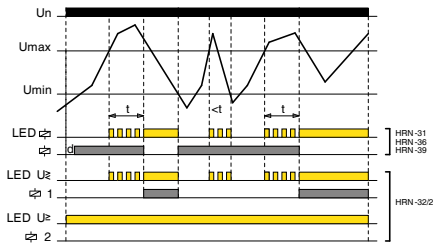


U2 UNDER (hysteresis to Umax)

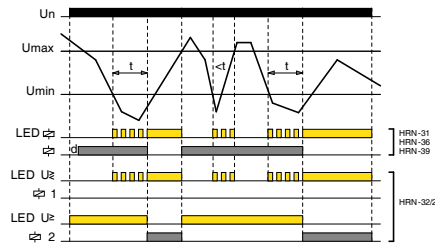


W WINDOW (hysteresis 5%)

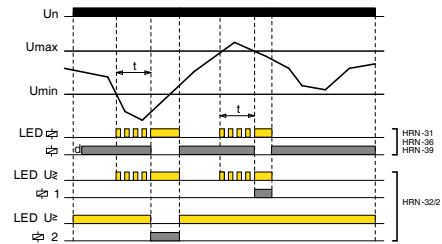


OL OVER + Latch

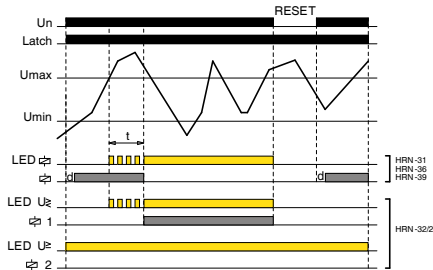

U3 UNDER (hysteresis to Umax)

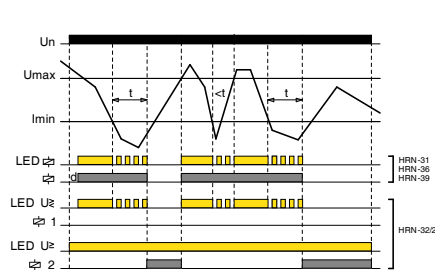

WL WINDOW + Latch

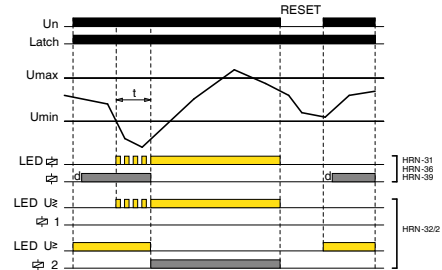

OVER:

If the value of the monitored voltage is lower than the set upper level „Umax“, the output contact is closed. If the „Umax“ is exceeded, the output contact will opens after the set delay (fault state).

If the voltage falls below the fixed hysteresis (O1 function) or the set lower level „Umin“ (O2 function), the output contact will closes again.

If the OL function (OVER + Latch) is selected, when the upper voltage level „Umax“ is exceeded, the output contact remains open even when the voltage returns from the fault state.

Fault memory reset can be done in three ways:

- Short-term interruption of supply voltage
- Using the control input (R)
- By setting the function switch to position R (RESET) or any function without memory fault

The RESET state lasts for 3 s after switching the function switch from the R position to a function with a memory fault (UL, OL, WL).

When moving to any other function from the R position, this delay does not apply.

UNDER:

If the value of the monitored voltage is higher than the set lower level „Umin“, the output contact is closed. When the voltage drops below the „Umin“, output contact opens after the set delay (fault state).

If the voltage exceeds the fixed hysteresis (function U1) or the set upper level „Umax“ (function U2, U3), the output contact closes again.

If the UL function (UNDER + Latch) is selected, when the voltage drops below the lower level „Umin“, the output contact remains open even when returning from the fault state. Fault memory reset can be done as in the previous case.

WINDOW:

If the value of the monitored voltage is lower than upper level „Umax“ and at the same time higher than lower level „Umin“, the output contact in closed. If the „Umax“ is exceeded or drops below the „Umin“, output contact opens after the set delay (fault state).

To return from the fault state, a fixed hysteresis is applied.

If the WL function (WINDOW + Latch) is selected, the fault state is again stored in memory and output contact stays open, even when returning from the fault state. Fault memory reset can be done as in the previous cases.



PMR1-31: (8595188188654)
 PMR1-31/2: (8595188185363)
 PMR1-36: (8595188188661)
 PMR1-36/2: (8595188188678)
 PMR1-39: (8595188188685)
 PMR1-39/2: (8595188188692)




- It is used to monitor the value of alternating or direct voltage in 1-phase circuits.
- Supply voltage from monitored voltage.
- Monitors voltage exceeding the upper voltage level (Umax) and falling below the lower voltage level (Umin) – according to the selected function.
- Smooth adjustment of both voltage levels – the lower level Umin is set in % of the upper level Umax.
- Adjustable time delay (to eliminate short-term voltage drops and peaks).
- Option to select functions with fault state memory (Latch).
- The fault state memory can be reseted with a button on the panel (RESET).
- Measures true root mean square value of the voltage - TRUE RMS.

Technical parameters		PMR1-31 PMR1-31/2	PMR1-36 PMR1-36/2	PMR1-39 PMR1-39/2
Supply and measuring		AC/DC 48 – 276 V	DC 6 – 30 V	AC/DC 24 – 150 V
Supply/monitored terminals:	(AC 50-60 Hz)	2-7		(AC 50-60 Hz)
Supply/monitored voltage:	2.5 VA/0.55 W 2.7 VA/0.65 W	0.35 W 0.5 W	2.5 VA/0.55 W 2.7 VA/0.65 W	
Consumption (max.):	AC 160 – 276 V 30 – 95 %Umax	DC 12 – 30 V 50 – 95 %Umax	AC 80 – 150 V 30 – 95 %Umax	
Upper level setting (Umax):	AC 276 V	DC 36 V	AC 276 V	
Lower level setting (Umin):	AC 290 V	DC 48 V	AC 290 V	
Max. permanent voltage:				
Peak overload (1 s):				
Time delay (d):	300 ms			
Time delay (t):	adjustable, 0,5 – 10 s			
Accuracy				
Setting accuracy (mech.):	5 % – mechanical setting			
Repeat accuracy:	< 1 %			
Temperature dependency:	< 0.1 %/°C (°F)			
Hysteresis	5 % (functions O1, U1, W)			
(fault to OK):	Umax – Umin (functions O2, U2, U3)			
Output				
Contact type:	1× changeover 2× changeover	1× changeover 2× changeover	1× changeover 2× changeover	
Contact material:	AgNi			
Current rating:	13 A/AC1; 1 HP 240 Vac, 1/2 HP 120 Vac; PD. B300			
Breaking capacity:	4000 VA/AC1, 384 W/DC1			
Switching voltage:	250 V AC/24 V DC			
Power dissipation (max.):	PMR1-3x (1.2 W) PMR1-3x/2 (2.4 W)			
Mechanical life:	10.000.000 ops.			
Electrical life (AC1):	100.000 ops.			
Other information				
Operating temperature:	–20 .. 55 °C (–4 .. 131 °F)			
Storage temperature:	–30 .. 70 °C (–22 .. 158 °F)			
Dielectric strength:	AC 4 kV (supply – output)			
Operating position:	any			
Mounting:	DIN rail EN 60715			
Protection degree:	IP40 front panel / IP20 terminals			
Overvoltage category:	III.			
Pollution degree:	2			
Dimensions:	48 × 48 × 79 mm (1.89" × 1.89" × 3.11")			
Weight:	94 g (3.32 oz) 105 g (3.7 oz)	94 g (3.32 oz) 105g (3.7 oz)	94 g (3.32 oz) 105g (3.7 oz)	
Standards:	EN 60255-1, EN 60255-26, EN 60255-27			


Description

PMR1-31

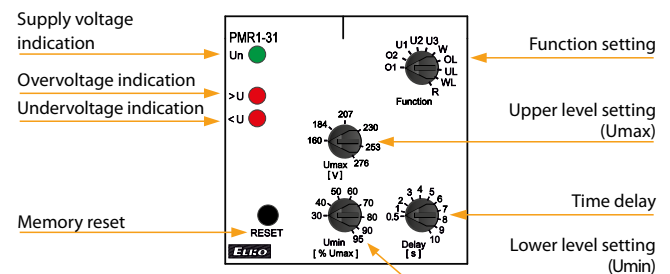


Connection


PMR1-3x



PMR1-3x/2




Indication of operating states

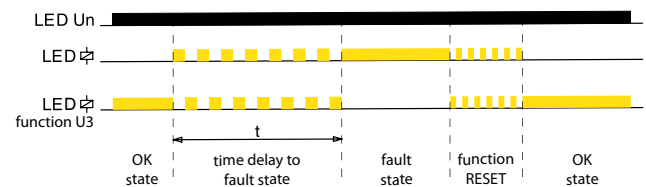


PMR1-31, PMR1-36, PMR1-39 | Multifunction voltage monitoring relays in 1P - AC/DC


O1 OVER (hysteresis 5%)

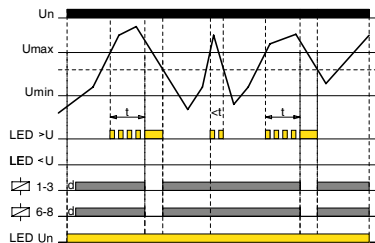

O2 OVER (hysteresis to Umin)

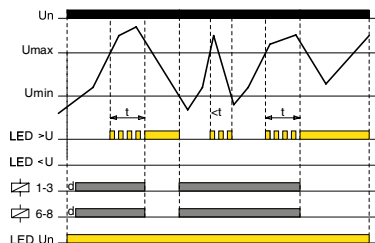

OL OVER + Latch

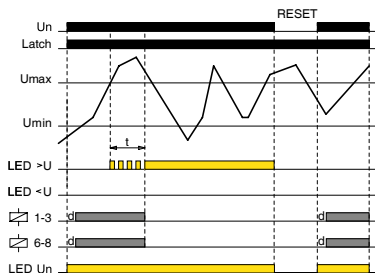

OVER:

If the value of the monitored voltage is lower than the set upper level „Umax“, the output contact is closed. If the „Umax“ is exceeded, the output contact will opens after the set delay (fault state).

If the voltage falls below the fixed hysteresis (O1 function) or the set lower level „Umin“ (O2 function), the output contact will closes again.

If the OL function (OVER + Latch) is selected, when the upper voltage level „Umax“ is exceeded, the output contact remains open even when the voltage returns from the fault state.


Fault memory reset can be done in three ways:

- Using memory reset button on the panel
- Short-term interruption of supply voltage
- By setting the function switch to position R (RESET) or any function without memory fault


The RESET state lasts for 3 s after switching the function switch from the R position to a function with a memory fault (UL, OL, WL).

When moving to any other function from the R position, this delay does not apply.


U1 UNDER (hysteresis 5%)

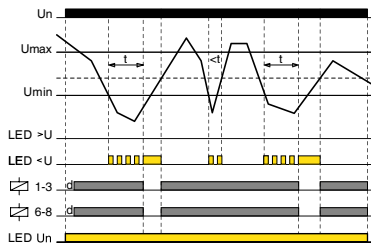

U2 UNDER (hysteresis to Umax)

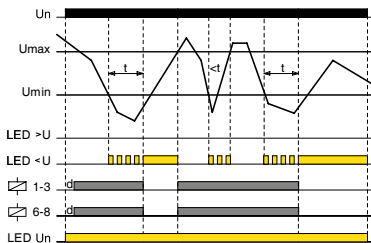

U3 UNDER (hysteresis to Umax)

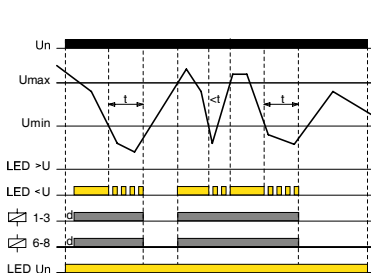


UNDER:

If the value of the monitored voltage is higher than the set lower level „Umin“, the output contact is closed. When the voltage drops below the „Umin“, output contact opens after the set delay (fault state).


If the voltage exceeds the fixed hysteresis (function U1) or the set upper level „Umax“ (function U2, U3), the output contact closes again.

If the UL function (UNDER + Latch) is selected, when the voltage drops below the lower level „Umin“, the output contact remains open even when returning from the fault state. Fault memory reset can be done as in the previous case.


UL UNDER + Latch

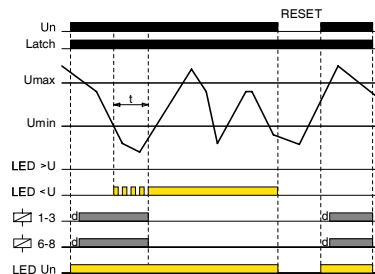

W WINDOW (hysteresis 5%)

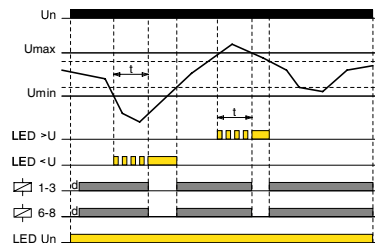

WL WINDOW + Latch

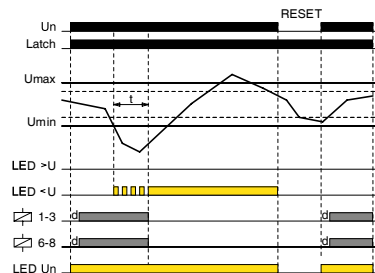

WINDOW:

If the value of the monitored voltage is lower than upper level „Umax“ and at the same time higher than lower level „Umin“, the output contact is closed. If the „Umax“ is exceeded or drops below the „Umin“, output contact opens after the set delay (fault state).

To return from the fault state, a fixed hysteresis is applied.

If the WL function (WINDOW + Latch) is selected, the fault state is again stored in memory and output contact stays open, even when returning from the fault state. Fault memory reset can be done as in the previous cases.



EAN code
 HRN-56/208V: 8595188130134
 HRN-56/240V: 8595188137119
 HRN-56/400V: 8595188137126
 HRN-56/480V: 8595188130189
 HRN-56/575V: 8595188130196



Technical parameters

HRN-56

	208	240	400	480	575
Supply/monitoring terminals:	L1, L2, L3				
Supply/measured voltage:	3x 208 V L-L (3x120 V L-N) (50-60 Hz)	3x 240 V L-L (3x139 V L-N) (50-60 Hz)	3x 400 V L-L (3x230 V L-N) (50-60 Hz)	3x 480 V L-L (3x277 V L-N) (50-60 Hz)	3x 575 V L-L (3x332 V L-N) (50-60 Hz)
Burden:	max. 2 VA/1 W				
Max. dissipated power (Un + terminals):	2 W				
Level Umin:	adjustable 70 - 95 % Un				
Level Uoff:	60 % Un				
Hysteresis:	2 %				
Max. permanent overload:	AC 3x 276 V	AC 3x 460 V	AC 3x 550 V	AC 3x 660 V	AC 3x 660 V
Peak overload <1s:	AC 3x 300 V	AC 3x 500 V	AC 3x 600 V	AC 3x 700 V	AC 3x 700 V
Time delay t1:	max. 500 ms				
Time delay t2:	adjustable 0 - 10 s				
Time delay t3:	max. 1 s				

Output

Number of contacts:	1x changeover/SPDT (AgNi/Silver Alloy)				
Current rating:	8 A/AC1; 1/3 HP 240 Vac, 1/4 HP 120 Vac; PD. B300				
Breaking capacity:	2000 VA/AC1, 240 W/DC				
Inrush current:	10 A				
Switching voltage:	250 V AC/24 V DC				
Indication of state:	red LED				
Mechanical life:	60.000.000 ops.		30.000.000 ops.		
Electrical life (AC1):	150.000 ops.		200.000 ops.		

Other information

Operating temperature:	-20 .. +55 °C (-4 .. 131 °F)				
Storage temperature:	-30 .. +70 °C (-22 .. 158 °F)				
Dielectrical strength:	4 kV (supply - output)				
Operating position:	any				
Mounting:	DIN rail EN 60715				
Protection degree:	IP40 from front panel/ IP10 terminals			IP40 from front panel/ IP20 terminals	
Overvoltage category:	III.				
Pollution degree:	2				
Max. cable size (mm²):	solid wire max. 2x 2.5 or 1x 4/ with sleeve max. 1x 2.5 or 2x 1.5 (AWG 12)			max.1x 2.5, max. 2x 1.5/ with sleeve max. 1x 1.5 (AWG 12)	
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")			90 x 52 x 65 mm (3.5" x 2" x 2.6")	
Weight:	65 g (2.3 oz.)	65 g (2.3 oz.)	66 g (2.3 oz.)	110 g (3.9 oz.)	110 g (3.9 oz.)
Standards:	EN 60255-1, EN 60255-26, EN 60255-27				

Function description


Relay in 3-phase main monitors correct phase sequence and phase failure. Green LED illuminates permanently and indicates energization. In case of phase failure red LED flashes and relay turns off. When changing to faulty state, time delay applies - delay setting is done by potentiometer on the front panel of the device. In case of incorrect phase sequence, red LED shines permanently and relay is open. In case supply voltage falls below 60 % Un (U_{off} - lower level), relay immediately opens with no delay and faulty state is indicate by red LED.

HRN-56: Thanks to supply from all phases, relay is functional also in case of one phase failure.


- Relay monitors phase sequence and failure (e.g. control of correct motor winding etc.).
- Relay is designated for monitoring of 3-phase networks.
- Supply from all phases which means that relay is functional also in case of one phase failure.
- Supply and monitored supply Un:

1-MODULE	3-MODULE
HRN-56/208 - 3x 208 V	HRN-56/480 - 3x 480 V
HRN-56/240 - 3x 240 V	HRN-56/575 - 3x 575 V
HRN-56/400 - 3x 400 V	
- Fixed delay t1 (500 ms), adjustable delay t2 (0.1 - 10 s) and fixed delay t3 (max. 1 s).


Description

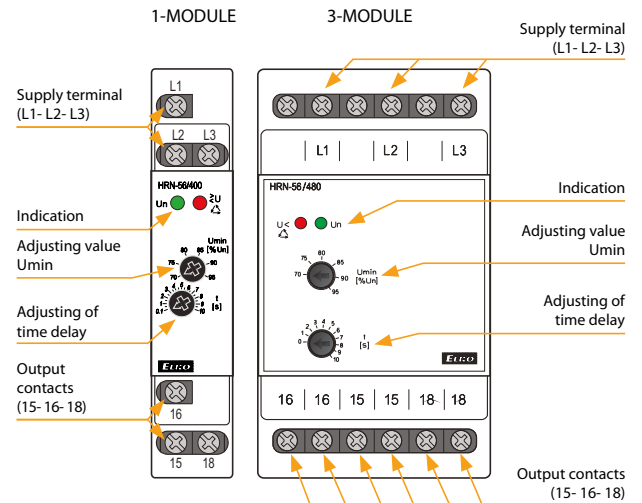


Function

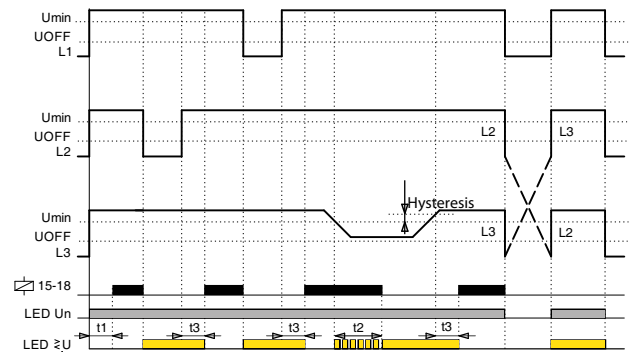

Connection

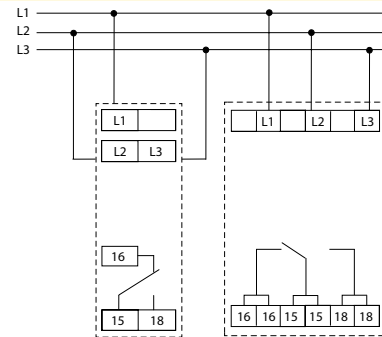

Symbol



HRN3-70, PMR3-70 | Voltage monitoring relays in 3P with selectable range



EAN code
HRN3-70: 8595188188838
PMR3-70: 8595188185288

Technical parameters	HRN3-70	PMR3-70
Supply/monitored terminals:	L1-L2-L3	3-4-5
Supply/monitored voltage:	AC 3× 190 – 500 V (50-60 Hz)	
Consumption (max.):	2 VA/1 W	
Upper level (Umax):	110 %Un	
Lower level (Umin):	80 – 95 %Un	
Asymmetry:	adjustable, 2 – 10 %Un + OFF	
Max. permanent voltage:	AC 3× 550 V	
Peak overload (1 s):	AC 3× 600 V	
Time delay (t1):	2 s	
Time delay (t2):	adjustable, 0.3 – 30 s	
Time delay (t3):	adjustable, 1 – 300 s	
Accuracy:		
Hysteresis (fault to OK):	5 %	
Output		
Contact type:	2× changeover (AgNi)	1× changeover (AgNi)
Current rating:	13 A/AC1; 1 HP 240 Vac, 1/2 HP 120 Vac; PD. B300	
Breaking capacity:	4000 A/AC1, 384 W/DC1	
Switching voltage:	250 V AC/24 V DC	
Power dissipation (max.):	2.4 W	1.2 W
Mechanical life:	10.000.000 ops.	
Electrical life (AC1):	100.000 ops.	
Other information		
Operating temperature:	–20 .. 55 °C (–4 .. 131 °F)	
Storage temperature:	–30 .. 70 °C (–22 .. 158 °F)	
Dielectric strength:		
supply – output 1	AC 4 kV	AC 2.5 kV
supply – output 2	AC 4 kV	-
output 1 – output 2	AC 4 kV	-
Operating position:	any	
Mounting:	DIN rail EN 60715	into socket (8-pin)
Protection degree:	IP40 front panel/ IP20 terminals	IP40
Overvoltage category:	III.	
Pollution degree:	2	
Cross-wire section – solid/ stranded with ferrule (mm²):	max. 1× 2.5, 2× 1.5/ max. 1× 2.5 (AWG 14)	max. 1× 4, 2× 2.5/ max. 1× 4 (AWG 12)
Dimensions:	90 × 52 × 66 mm	48 × 48 × 79 mm
Weight:	140 g (4.94 oz)	100 g (3.53 oz)
Standards:	EN 60255-1, EN 60255-26, EN 60255-27	

Range switch (Un)


The range switch has two ranges of phase-to-phase voltage values:

low (190 to 250V) and high (380 to 500V)


After connecting to the supply/monitored voltage, the device evaluates voltage size and selects the corresponding range of values. When switching between individual positions within the selected range, the green „LED Un“ will flash briefly.

- It is used for monitoring of voltage, phase failure, sequence and asymmetry in 3-phase network.
- Wide range of monitored voltage with automatic selection of an low/high range.
- Fixed overvoltage level (Umax), adjustable undervoltage level (Umin).
- Adjustable time delay t2 (to eliminate short-term voltage drops and peaks).
- Adjustable time delay t3 (to eliminate short-term OK state).
- Adjustable asymmetry level with option to turn it OFF.
- Measures true root mean square value of the voltage - TRUE RMS.
- Fault memory reset can be done by RESET button on the panel or by an external opening contact.

Description

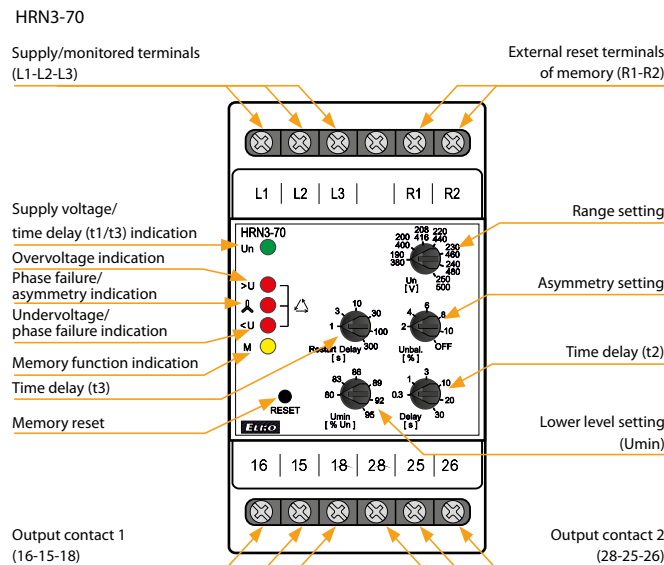


Connection

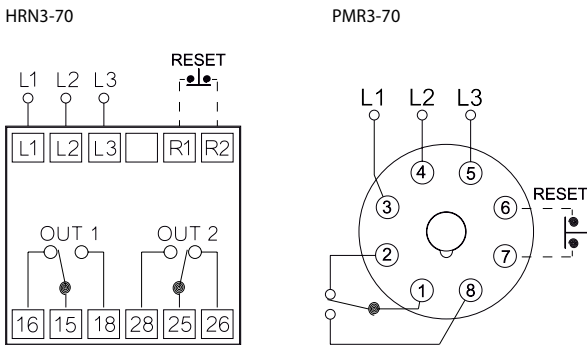

Function


Overvoltage - undervoltage

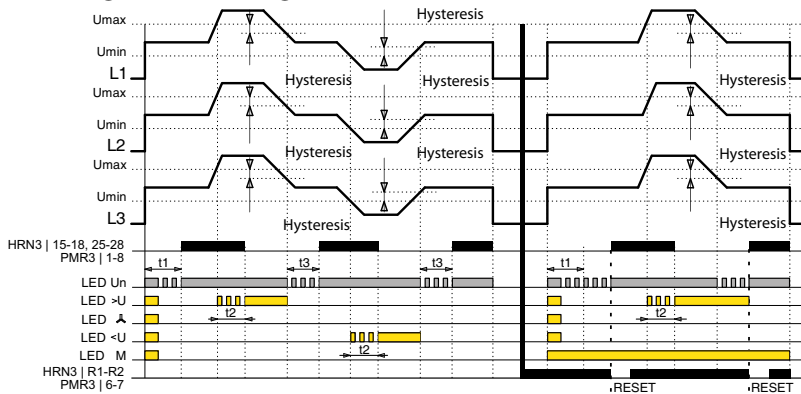


Graphs legend:

L1, L2, L3 = 3-phase voltage
 RESET = memory reset
 t1 = time delay, after connecting to voltage
 t2 = time delay into fault state
 t3 = time delay to OK state
 15-18 = output contact 1 (HRN3)
 25-28 = output contact 2 (HRN3)
 1-8 = output contact (PMR3)
 LED >U = overvoltage indication
 LED <U = undervoltage/phase failure indication
 LED Δ = phase failure/asymmetry indication
 LED M = memory function indication
 LED Un = supply/monitored voltage, time delay t1 and t3 indication

Phase asymmetry - failure

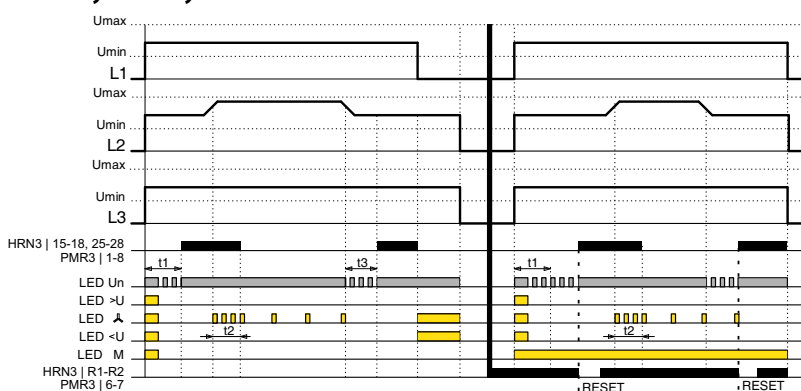

Phase sequence

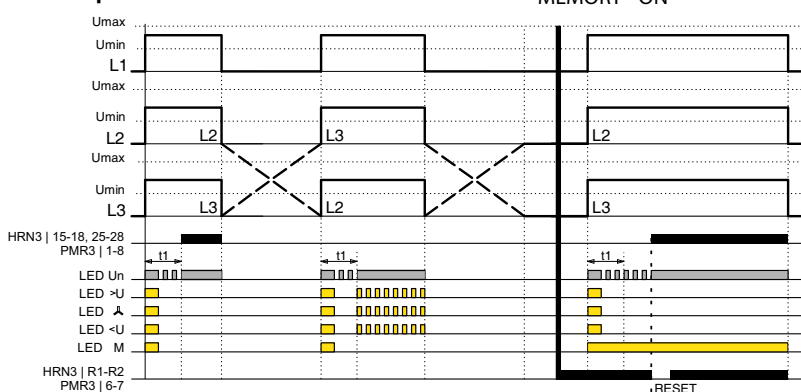

After connecting the device to the supply voltage, all the LEDs on the panel will flash briefly.

If a 3-phase voltage is connected to the monitoring relay and all conditions are met (correct voltage magnitude, sequence and phase asymmetry), the output contacts close after the time delay t1 has elapsed. During the time delay, the green „LED Un“ flashes, after the end of the delay it lights up permanently (OK state).

- When the voltage exceeds or falls outside the „Umin“ and „Umax“ levels, after the time delay t2 the green and the corresponding red „LED \lessgtr “ light up.

The output contacts are open (fault state). During the time delay, the red LED flashes.

- If the phase sequence is incorrect when the power is connected, after the time delay t1 the green „LED Un“ lights up + all 3 red „LEDs \lessgtr “ flash simultaneously.

The output contact is open (fault state). During the time delay, the green LED flashes.

- When the set phase asymmetry is exceeded, after the time delay t2 the green „LED Un“ lights up and the red „LED Δ “ flashes briefly.

The output contact is open (fault state). During the time delay, the red LED flashes rapidly.

- In the event of a phase failure, the output contacts open without a time delay t2 (fault state), the green „LED Un“ and the corresponding red „LED \lessgtr “ light up.

- To return from the fault state to the OK state, the time delay t3 is always applied. During this time delay, the green „LED Un“ flashes.

Reset and fault state memory activation:

By connecting terminals R1-R2 or pins 6-7 in the PLUG-IN version via an external push button with a break contact (RESET), the fault state memory is activated.

After turning on the power, the yellow „LED M“ on the device panel lights up. If a fault condition occurs, it is stored in memory. The red LED signalize fault just like in mode with fault state memory turned off. If the voltage values return to the set levels, the corresponding red LED will be permanently lit and at the same time the green „LED Un“ will start flashing. It is now possible to reset fault memory state, this closes the output contact and the red LED goes out (OK state). Fault memory reset (RESET) is performed either with an external pushbutton or with the pushbutton on device panel.

HRN3-80, HRN3-81 | Voltage monitoring relays in 3P - selectable range/fixed range






EAN code
HRN3-80: 8595188188814
HRN3-81: 8595188188821




- The relay is designed to monitor undervoltage (HRN3-80), phase loss, sequence and asymmetry in 3-phase network.
- Power supply from monitored circuit.
- **HRN3-80:** Monitors the drop below the lower voltage level (Umin).
- **HRN3-80:** The lower level of Umin is set in % of the selected range.
- Wide range of monitored voltage 208 – 480 V.
- Adjustable time delay (to eliminate short-term voltage drops).
- Measures true root mean square value of the voltage - TRUE RMS.
- Adjustable level of asymmetry with the option to turn it off.

Technical parameters		HRN3-80	HRN3-81
Supply and measuring			
Supply/monitored terminals:	L1-L2-L3		
Supply/monitored voltage:	AC 3× 208 – 480 V (50-60 Hz)		
Consumption (max.):	2 VA/1 W		
Range setting:	adjustable	fixed	
Lower level setting (Umin):	80 – 95 %Un	x	
Asymmetry setting:	adjustable, 2 – 10 %Un + OFF		
Max. permanent voltage:	AC 3× 550 V		
Peak overload (1 s):	AC 3× 600 V		
Time delay (t1):	2 s		
Time delay (t2):	adjustable, 0.3 – 30 s		
Accuracy			
Setting accuracy (mech.):	5 %		
Repeat accuracy:	< 1 %		
Temperature dependency:	< 0.1 %/°C (°F)		
Hysteresis (fault to OK):	5 %		
Output			
Contact type:	1x changeover/SPDT (AgNi)		
Current rating:	16 A/AC1; 1 HP 240 Vac, 1/2 HP 120 Vac; PD. B300		
Breaking capacity:	4000 A/AC1, 384 W/DC1		
Switching voltage:	250 V AC/24 V DC		
Power dissipation (max.):	1.2 W		
Mechanical life:	10.000.000 ops.		
Electrical life (AC1):	100.000 ops.		
Other information			
Operating temperature:	–20 .. 55 °C (–4 .. 131 °F)		
Storage temperature:	–30 .. 70 °C (–22 .. 158 °F)		
Dielectric strength:	AC 4 kV (supply – output)		
Operating position:	any		
Mounting:	DIN rail EN 60715		
Protection degree:	IP40 front panel / IP20 terminals		
Overvoltage category:	III.		
Pollution degree:	2		
Cross-wire section – solid/ stranded with ferrule (mm²):	max. 1× 2.5, 2× 1.5/ max. 1× 2.5 (AWG 14)		
Dimensions:	90 × 52 × 66 mm		
Weight:	66 g (2.32 oz)	64 g (2.26 oz)	
Standards:	EN 60255-1, EN 60255-26, EN 60255-27		

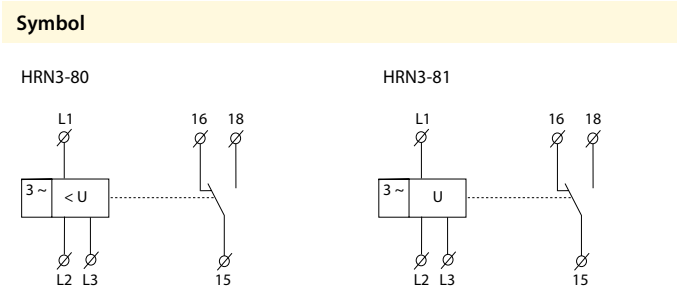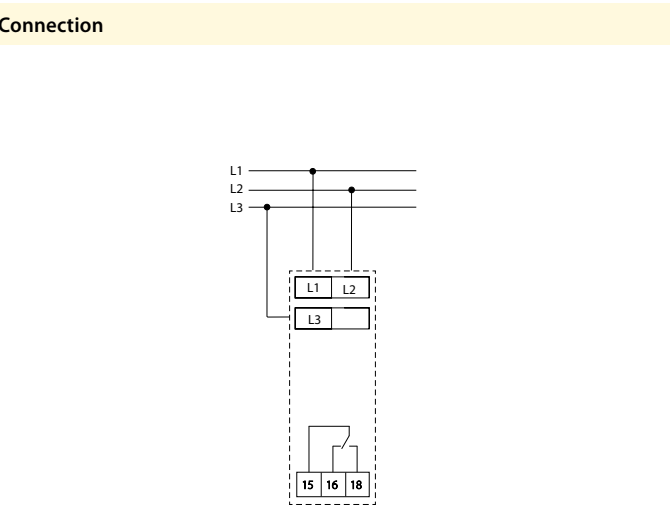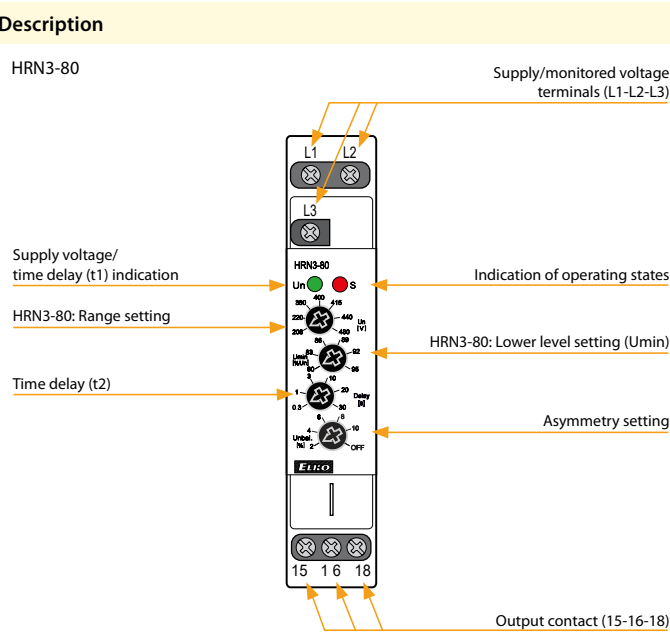

Function

Undervoltage:

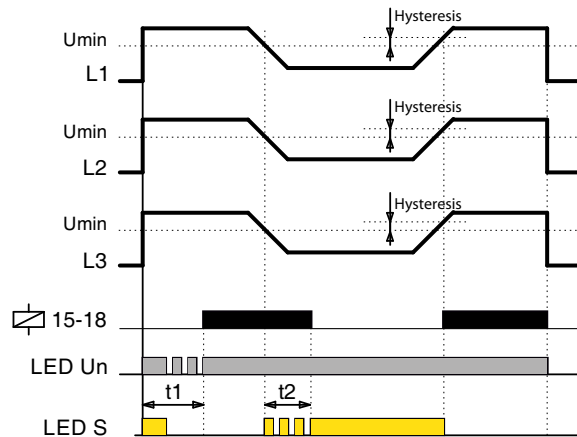

After connecting the device to the supply voltage, both LEDs on the panel will flash briefly.

If 3-phase voltage is connected to the monitoring relay and all conditions are met (correct voltage level, phase sequence and asymmetry), the output contact closes after the time delay t_1 elapsed.

During the time delay, the green „LED Un“ flashes, at the end of the delay „LED Un“ lights up continuously (OK state).


When the voltage drops below the lower level „Umin“ (HRN3-80 only), after the time delay t_2 has elapsed the green and red LEDs are lit. The output contact is open (fault state).

During the time delay t_2 , the red „LED S“ flashes quickly.

If the phase sequence is incorrect when the power supply is connected, after the time delay t_1 has elapsed the green and red LED flashes quickly. The output contact is open (fault state).

During the time delay t_1 , the green „LED Un“ flashes.

Phase sequence:

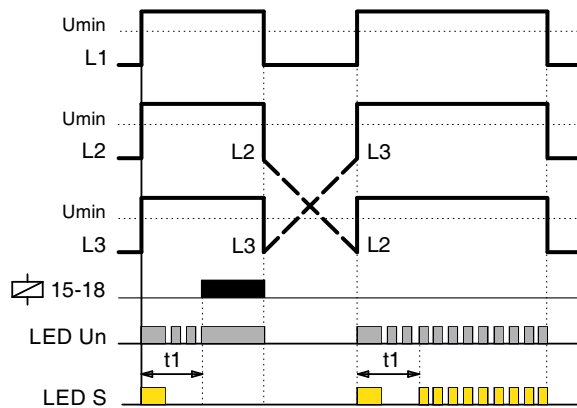


When the set phase asymmetry is exceeded, after the time delay t_2 has elapsed the green LED is lit and the red LED flashes briefly. The output contact is open (fault state).

During the time delay t_2 , the red „LED S“ flashes quickly.

In the event of phase failure, the output contact opens without a time delay t_2 (fault state), the green and red LEDs are lit.

The return from the fault state to the OK state occurs without a time delay.

Phase asymmetry, failure:

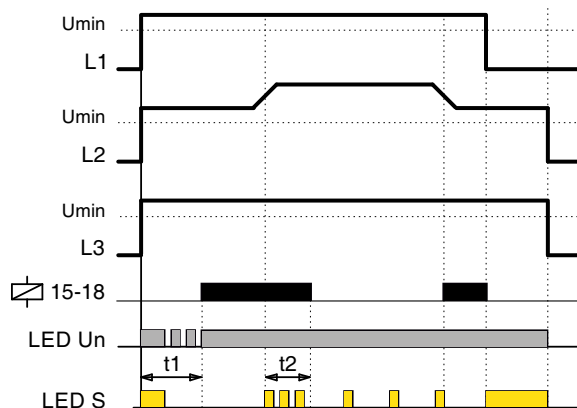

MONITORING RELAYS-CURRENT

AC



PRI-32

Monitoring by current transformer (wire through an opening, galv. separated, without heat loss), adjust. current 1-20 A, multivoltage AC 24-240 and DC 24 V, output 8 A changeover. page 43



PRI-34

Multifunction current monitoring relay, measured by built-in current transformer, 5 rated currents (1 A-16 A), 1 A and 5 A range is suitable for external current transformer, AC/DC supply 24-240 V, output 8 A prep. page 44



PRI-51

Monitoring of current by in-built transformer, 7 ranges, range 5 A is suitable for current transformer, supply and output as PRI-32, difference from PRI-32: direct monitoring and finer ranges (higher sensitivity) = higher accuracy in measuring. page 46

Type	Design	Supply voltage	Galvanically separated	Monitored parameters					Setting			Description	Page
				Phases	Range	$> I$	$< I$	$\leq I$	Delay	Hysteresis	Memory faults		
PRI-32	1-M	AC 24-240 V DC 24 V	●	1	AC 1 - 20 A	●	x	x	x	x	x	Monitors the overflow of the current flowing through the guarded conductor, passed through the hole in the panel.	43
PRI-34/1A PRI-34/2A PRI-34/5A PRI-34/8A PRI-34/16A	1-M	AC/DC 24-240 V	x	1	AC 0.05 - 1 A AC 0.1 - 2 A AC 0.25 - 5 A AC 0.4 - 8 A AC 0.8 - 16 A	●	●	●	●	●	●	Monitors the current depending on the selected function. The power supply is not galvanically isolated from the monitored current terminals. It is possible to connect ext. current transformer.	44
PRI-51/0.5A PRI-51/1A PRI-51/0.1-10A PRI-51/2A PRI-51/5A PRI-51/8A PRI-51/16A	1-M	AC 24-240 V DC 24 V	●	1	AC 0.05 - 0.5 A AC 0.1 - 1 A AC 0.1-10 A AC 0.2 - 2 A AC 0.5 - 5 A AC 0.8 - 8 A AC 1.6 - 16 A	●	x	x	●	x	x	Monitors the excess current flowing through the conductor connected to the monitored terminals. The power supply is galvanically isolated from the monitored current terminals. It is possible to connect ext. current transformer.	46



EAN code
PRI-32: 8595188121965

Technical parameters

PRI-32

Supply circuit

Supply terminals:	A1 - A2
Voltage range:	AC 24 - 240 V, DC 24 V (AC 50-60 Hz)
Burden:	max. 1.5 VA/1 W
Max. dissipated power (Un + terminals):	2 W
Operating range:	-15 %; +10 %

Measuring circuit

Current range:	1 - 20 A (AC 50-60 Hz)
Current adjustment:	potentiometer

Accuracy

Setting accuracy (mech.):	5 %
Repeat accuracy:	< 1 %
Temperature dependency:	< 0.1 %/°C (°F)
Limit values tolerance:	5 %
Overload capacity:	max. 100 A/10 s

Output


Number of contacts:	1x changeover/SPDT (AgNi/Silver Alloy)
Current rating:	8 A/AC1; 1/3 HP 240 Vac, 1/4 HP 120 Vac; PD. B300
Breaking capacity:	2000 VA/AC1, 240 W/DC
Output indication:	red LED
Mechanical life:	60.000.000 ops.
Electrical life (AC1):	150.000 ops.

Other information


Operating temperature:	-20 .. 55 °C (-4 .. 131 °F)
Storage temperature:	-30 .. 70 °C (-22 .. 158 °F)
Dielectrical strength:	4 kV (supply - output)
Operating position:	any
Mounting:	DIN rail EN 60715
Protection degree:	IP40 from front panel/IP10 terminals
Overvoltage category:	III.
Pollution degree:	2
Max. cable size (mm ²):	solid wire max. 2x 2.5 or 1x 4, with sleeve max. 1x 2.5 or 2x 1.5 (AWG 12)
Dimensions:	90 x 17.6 x 80.5 mm (3.5" x 0.7" x 3.2")
Weight:	75 g (2.6 oz.)
Standards:	EN 60255-1, EN 60255-26, EN 60255-27

- Current transformer is a part of the product. Inside this transformer there is a wire which senses the volume of flowing current.
- This construction reduces thermal stress of product when compared with conventional solutions with inbuilt shunt, and increases current range up to 20 Amps, and galvanically separates monitored circuit.
- For heating bars in sliding rails, heating cables, indication of current flow, controlling of 1-phase motor consumption,...
- Supply is galvanically separated from measuring current.
- Current exceeding - current flowing through monitored wire must not exceed 100 A.

Description

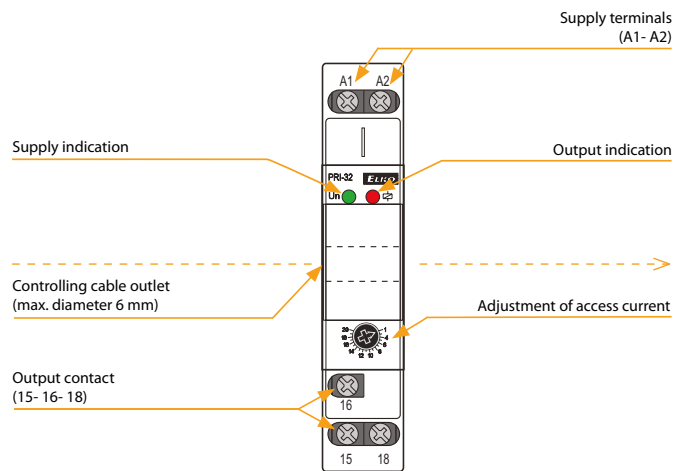


Function

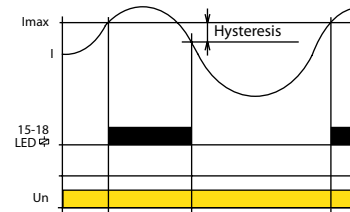


Monitoring relay PRI-32 serves to monitor current level in single phase AC circuits. Due to its fluent adjustment of release current, it is predestined for applications with necessity of current flow indication, and can be used as precedence relay. Output relay is off in normal state. In case the set current level is exceeded, it switches. Multivoltage supply is an advantage.

Connection

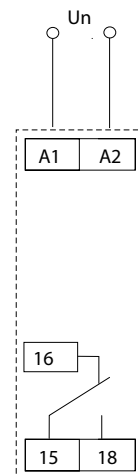

Symbol



PRI-34 | Multifunction current monitoring relays in 1P - AC






EAN code
PRI-34/1A: 8595188188968
PRI-34/2A: 8595188182829
PRI-34/5A: 8595188182836
PRI-34/8A: 8595188188975
PRI-34/16A: 8595188182843




Technical parameters		PRI-34
Supply		
Supply terminals:	A1 – A2	
Supply voltage:	AC/DC 24 – 240 V (AC 50-60 Hz)	
Consumption (max.):	3.8 VA/0.7 W	
Supply voltage tolerance:	–15 %; +10 %	
Measuring circuit		
Current range:	PRI-34/1A In - 1A PRI-34/2A In - 2A PRI-34/5A In - 5A PRI-34/8A In - 8A PRI-34/16A In - 16A (AC 50-60 Hz)	
Max. permanent current peak overload (1 s):	PRI-34/1A 2A/10A PRI-34/2A 4A/10A PRI-34/5A 10A/16A PRI-34/8A 16A/16A PRI-34/16A 17A/32A	
Upper level setting (Imax):	10 – 100 %In	
Lower level setting (Imin):	5 – 95 %In	
Time delay (d):	300 ms	
Time delay (t):	adjustable, 0.5 – 10 s	
Accuracy		
Setting accuracy (mech.):	5 %	
Repeat accuracy:	< 1 %	
Temperature dependency:	< 0.1 %/°C	
Limit values tolerance:	5 %	
Hysteresis (fault to OK):	5 % (function O1, U1, W) Imax – Imin (function O2, U2)	
Output		
Contact type:	1x changeover (AgNi)	
Current rating:	13 A/AC1; 1 HP 240 Vac, 1/2 HP 120 Vac; PD. B300	
Breaking capacity:	4000 VA/AC1, 384 W/DC1	
Switching voltage:	250 V AC/24 V DC	
Power dissipation (max.):	1.2 W	
Mechanical life:	10.000.000 ops.	
Electrical life (AC1):	100.000 ops.	
Other information		
Operating temperature:	–20 .. +55 °C (–4 .. 131 °F)	
Storage temperature:	–30 .. +70 °C (–22 .. 158 °F)	
Dielectric strength:	AC 4 kV (supply – output)	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Protection degree:	IP40 front panel / IP20 terminals	
Overvoltage category:	III.	
Pollution degree:	2	
Cross-wire section – solid/stranded with ferrule (mm²):	max. 1× 2.5, 2× 1.5/ max. 1× 2.5 (AWG 14)	
Dimensions:	90 × 17.6 × 64 mm (3.5" × 0.7" × 2.5")	
Weight:	60 g (2.15 oz)	
Standards:	EN 60255-1, EN 60255-26, EN 60255-27	

- It is used to monitor the value of alternating current, e.g.: motors, heating cables, lamps and other devices.
- Power supply and monitoring circuits are not galvanically isolated.
- Monitors current exceeding the upper current level (Imax) and falling below the lower current level (Imin) – according to the selected function.
- Smooth adjustment of both current levels.
- Adjustable time delay (to eliminate short-term current drops and spikes).
- Option to select functions with fault state memory (Latch).
- Measures true root mean square value of the current - TRUE RMS.
- Possibility to extend the current range using an external current transformer.

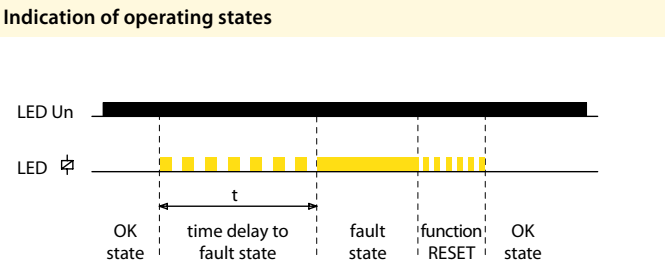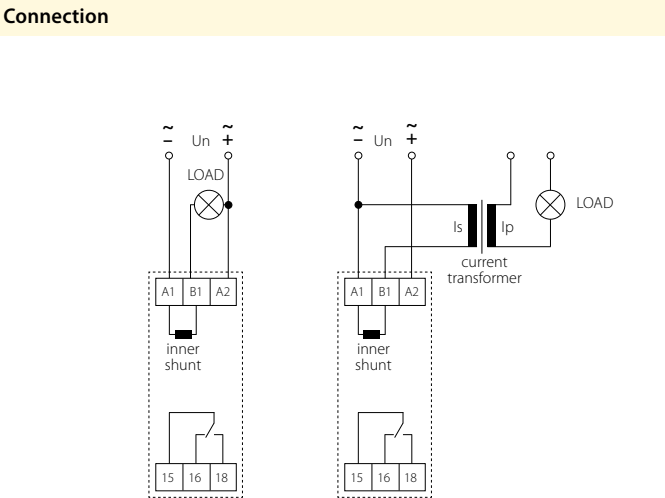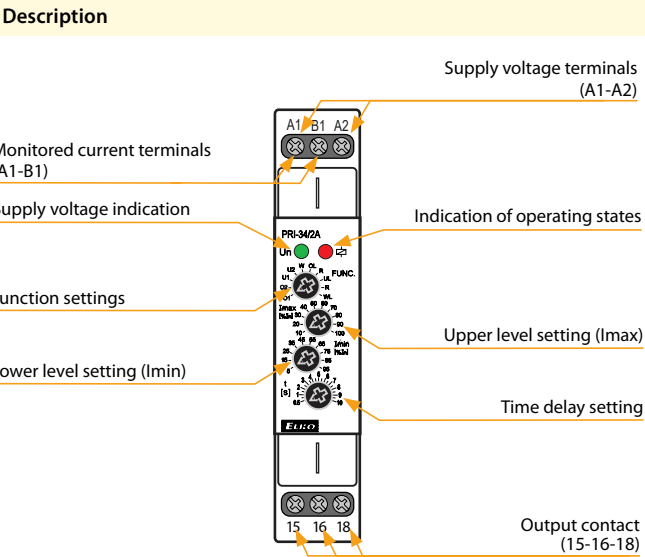


Function


O1 OVER (hysteresis 5%)

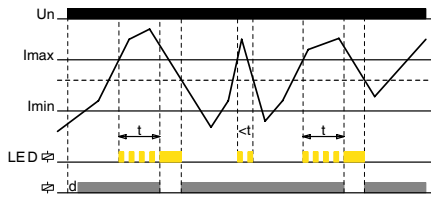

O2 OVER (hysteresis to I_{min})

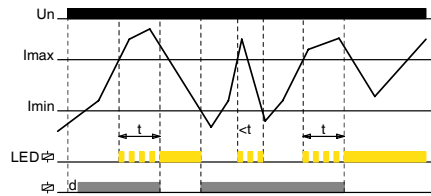

OL OVER + Latch

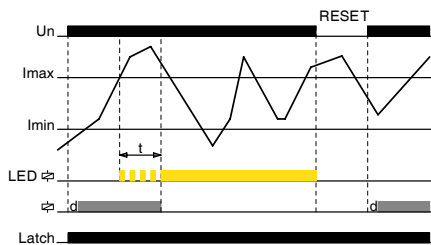

OVER:

- If the value of the monitored current is lower than the set upper level „ I_{max} “, the output contact is closed. If the „ I_{max} “ is exceeded, the output contact will open after the set delay (fault state).
- If the current falls below the fixed hysteresis (function O1) or the set lower level „ I_{min} “ (function O2), the output contact will closes again.
- If the OL function (OVER + Latch) is selected, when the upper current level „ I_{max} “ is exceeded, the output contact remains open even when the current returns from the fault state.


Fault memory reset can be done in two ways:

- Short-term interruption of supply voltage.
- By setting the function switch to position R (RESET) or any function without memory fault.


The RESET state lasts for 3 s after switching the function switch from the R position to a function with memory fault (UL, OL, WL).

When moving to any other function from the R position, this delay does not apply.


U1 UNDER (hysteresis 5%)

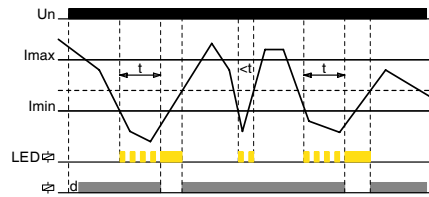

U2 UNDER (hysteresis to I_{max})

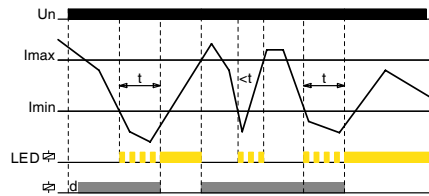


UL UNDER + Latch

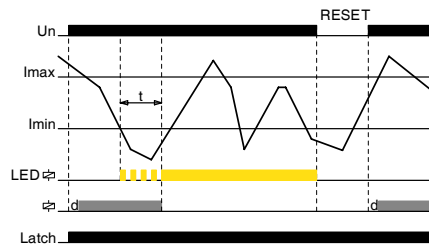


UNDER:

- If the value of the monitored current is higher than the set lower level „ I_{min} “, the output contact is closed. When the current drops below the „ I_{min} “, output contact opens after the set delay (fault state).
- If the current exceeds the fixed hysteresis (function U1) or the set upper level „ I_{max} “ (function U2), the output contact closes again.
- If the UL function (UNDER + Latch) is selected, when the current drops below the lower level „ I_{min} “, the output contact remains open even when returning from the fault state. Fault memory reset can be done as in the previous case.

W WINDOW (hysteresis 5%)

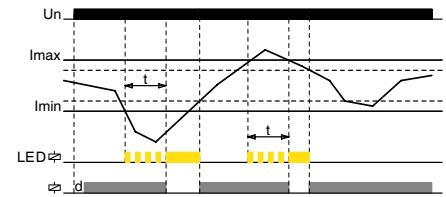

WL WINDOW + Latch

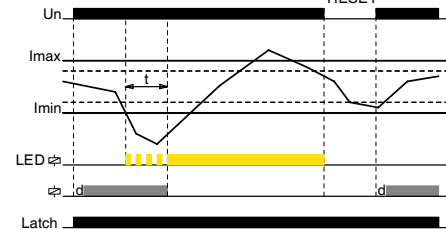

Graphs legend:

t = time delay to fault state

d = delay 0.3 s after connection of power supply (U_n)

WINDOW:

- If the value of the monitored current is lower than upper level „ I_{max} “ and at the same time higher than lower level „ I_{min} “, the output contact in closed. If the „ I_{max} “ is exceeded or drops below the „ I_{min} “, output contact opens after the set delay (fault state).
- To return from the fault state, a fixed hysteresis is applied.
- If the WL function (WINDOW + Latch) is selected, the fault state is again stored in memory and output contact stays open, even when returning from the fault state. Fault memory reset can be done as in the previous cases.

PRI-51 | Current monitoring relays of I_{max} level in 1P - AC





EAN code
PRI-51/1A: 8595188124904
PRI-51/2A: 8595188124911
PRI-51/5A: 8595188124928
PRI-51/8A: 8595188124935
PRI-51/16A: 8595188124942

- It serves for monitoring of heating in rail-switches, heating cables, consumption of 1-phase motors, indicates current flow.
- Flexible adjustment by potentiometer.
- Adjustable delay 0.5 - 10 s to eliminate short current peaks.
- It is possible to use for current scanning from current transformer.
- Supply is galvanically separated from measured current, it must be in the same phase.



Technical parameters		PRI-51
Supply circuit		
Supply terminals:	A1 - A2	
Voltage range:	AC 24 - 240 V and DC 24 V (AC 50-60 Hz)	
Burden:	max. 25 VA/1.6 W	
Max. dissipated power (Un + terminals):	2.5 W	
Supply voltage tolerance:	−15 %; +10 %	
Measuring circuit		
Load:	between B1 - B2	
Current range:	PRI-51/1 A: AC 0.1-1 A PRI-51/2 A: AC 0.2-2 A PRI-51/5 A*: AC 0.5-5 A	PRI-51/8 A: AC 0.8-8 A PRI-51/16 A: AC 1.6-16 A (AC 50-60 Hz)
Max. permanent current:	PRI-51/1 A: 4 A PRI-51/2 A: 8 A PRI-51/5 A, PRI-51/8 A, PRI-51/16 A: 17 A	
Inrush overload <1ms:	50 A	
Current adjustment:	potentiometer	
Time delay:	adjustable 0.5 - 10 s	
Accuracy		
Setting accuracy (mechanical):	5 %	
Repeat accuracy:	< 1 %	
Temperature dependancy:	< 0.1 %/°C (°F)	
Limit values tolerance:	5 % (10 % for 0.05 - 0.5 A and 0.1 - 10 A range)	
Hysteresis (fault to OK):	5 %	
Mechanical life:	60.000.000 op.	
Electrical life (AC1):	150.000 op.	
Output		
Number of contacts:	1x changeover/SPDT (AgNi/Silver Alloy)	
Current rating:	8 A/AC1; 1/3 HP 240 Vac, 1/4 HP 120 Vac; PD. B300	
Breaking capacity:	2000 VA/AC1, 240 W/DC	
Output indication:	red LED	
Other information		
Operating temperature:	−20 .. 55 °C (−4 .. 131 °F)	
Storage temperature:	−30 .. 70 °C (−22 .. 158 °F)	
Dielectrical strength:	4 kV (supply - output)	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Protection degree:	IP40 from front panel/IP10 terminals	
Overvoltage cathegory:	III.	
Pollution degree:	2	
Max. cable size (mm²):	solid wire max. 2x 2.5 or 1x 4, with sleeve max. 1x 2.5 or 2x 1.5 (AWG 12)	
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")	
Weight:	72 g (2.5 oz.)	
Standards:	EN 60255-1, EN 60255-26, EN 60255-27	

* applicable also for current transformer

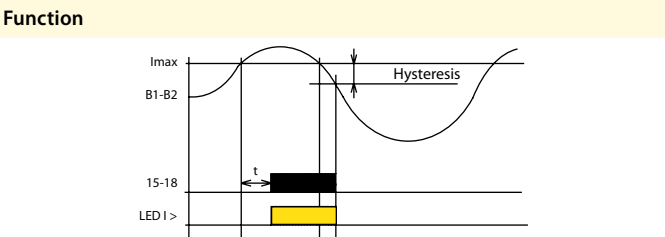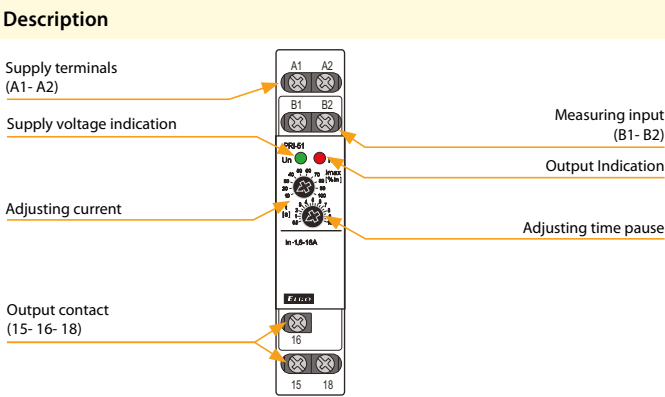

Monitoring relay PRI-51 serves to monitor current level in one-phase AC circuits. Gradual setting of actuating current of monitoring relay enables many different applications. Output relay is in normal state opened. After the set current level is reached, relay closes after the set delay (0.5 - 10 s). When returning from faulty to normal state there is a hysteresis (5 %). Multi-voltage of this relay is an advantage. It is possible to monitor load which doesn't have the same supply as monitoring relay PRI-51.

Range of PRI-51 can be increased by an external current transformer.

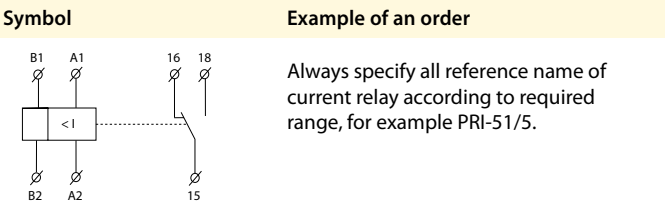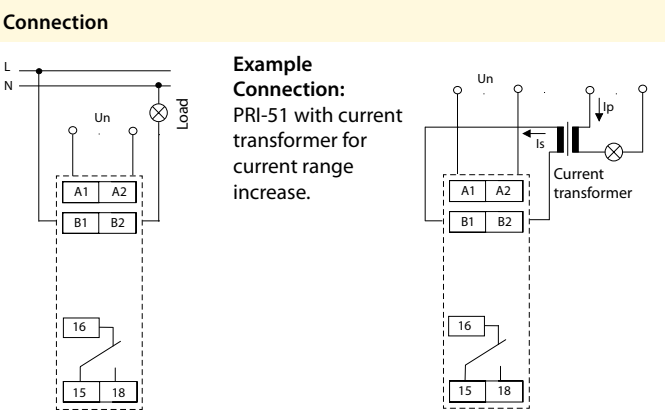

VS



VS116U

Supply voltage:
AC/DC 12-240 V
Output contact:
1x changeover/SPDT 16 A.
page 48



VS308U


Supply voltage:
AC/DC 12-240 V
Output contacts:
3x changeover/TPDT 8 A.
page 48

Type	Design	Supply voltage	Output contact	Other features			Description	Page
				LED signal light	RC unit	Parallel diode		
VS116U	1M-DIN	AC/DC 12 – 240 V	1x16 A changeover/ SPDT	●	●	●	Universal supply voltage	48
VS308U	1M-DIN	AC/DC 12 – 240 V	3x 8 A changeover/ TPDT	●	●	●	Universal supply voltage	

VS | Auxiliary relays




- Power relay used for switching larger load output, strengthen or „multiplying“ contacts of the existing device.
- In the design 1-MODULE , DIN rail mounting, output status indicated by high intensity LED with choice of LED color (red, green, blue or white LED*).


Technical parameters		VS116U	VS308U
Supply terminals:		A1 - A2	
Voltage range:		AC/DC 12-240 V (50-60 Hz)	AC/DC 12-240 V (50-60 Hz)
Burden (max.):		AC 0.7 - 3 VA/DC 0.5 - 1.7 W	AC 0.7 - 3 VA/DC 0.5 - 1.7 W
Supply terminals:		x	x
Voltage range:		x	x
Burden:		x	x
Supply voltage tolerance:		-15%; +10%	
Max. dissipated power (Un + terminals):	4 W	3 W	
Output			
Number of contacts:	1 x changeover/SPDT (AgSnO ₂)		3 x changeover/TPDT (AgNi/Silver Alloy)
Current rating:	16 A/AC1; 1 HP 240Vac, 1/2 HP 120Vac; PD. B300		8 A/AC1; 1/2 HP 240Vac; PD. B300
Breaking capacity:	4000VA/AC1, 384W/ DC		2000VA/AC1, 192W/ DC
Inrush current:	30 A/<3 s		10 A/<3 s
Switching voltage:	250V AC/24V DC		
Output indication:	high intensity LED		
Mechanical life:	30.000.000 ops.		
Electrical life (AC1):	100.000 ops.		60.000 ops.
Time between switching:	min. 2s		
Other information			
Operating temperature:	-20 .. +55 °C (-4 .. 131 °F)		
Storage temperature:	-30 .. +70 °C (-22 .. 158 °F)		
Dielectric strength:	4 kV (supply-output)		
Operating position:	any		
Mounting:	DIN rail EN 60715		
Protection degree:	IP40 from front panel/IP20 terminals		
Overvoltage category:	III.		
Pollution degree:	2		
Max. cable size (mm²):	max. 1x 2.5 or 2x 1.5 max. 1x 2.5 (AWG 12)		
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")		
Weight:	59 g (2.1 oz.)		80 g (2.8 oz.)
Standards:	EN 60669-1, EN 60669-2-1		

Description

VS116U

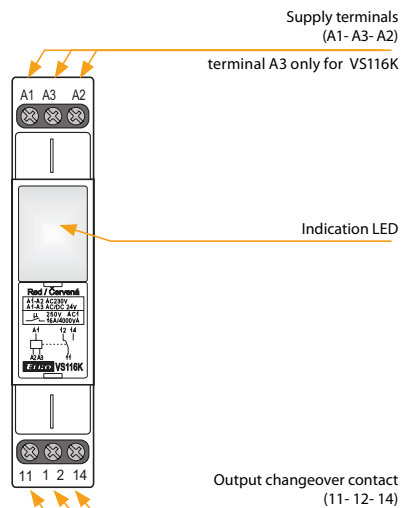


VS308U

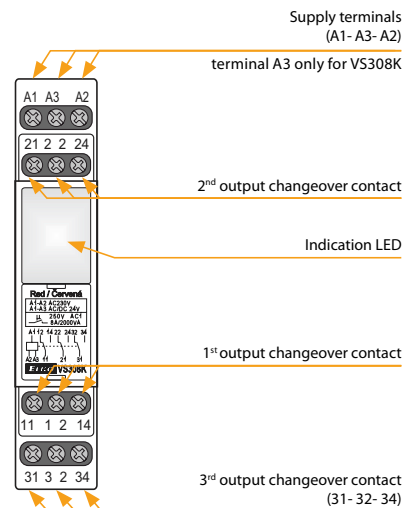


Symbol

VS116U



VS308U



VS | Auxiliary relays

EAN codes

VS116U/red	8595188124607	VS308U/red	8595188130103
VS116U/green	8595188136433	VS308U/green	8595188136440
VS116U/white	8595188138482	VS308U/white	8595188138512
VS116U/blue	8595188138475	VS308U/blue	8595188138505

Order code

	VS116U/red: 2460	VS308U/red: 3010
	VS116U/green: 3643	VS308U/green: 3644
	VS116U/white: 3848	VS308U/white: 3851
	VS116U/blue: 3847	VS308U/blue: 3850

Notes

Max. time of changeover of contact is 10 ms.

* possibility to choose blue and white color of LED for power relays line VS in case of minimal order quantity 100 pcs.

Installation contactors

Installation contactors VS



VS120

Number of contacts:
1x20 A. Configuration
of switching and
breaking contacts:
10, 01.
page 56



VS220

Number of contacts:
2x20 A. Configuration
of switching and
breaking contacts: 20,
11, 02.
page 56



VS425

Number of contacts:
4x25 A. Configuration
of switching and
breaking contacts:
40, 31, 22, 04.
page 56



VS440

Number of contacts:
4x40 A. Configuration
of switching and
breaking contacts:
40, 31, 22, 04.
page 56



VS463

Number of contacts:
4x63 A. Configuration
of switching and
breaking contacts:
40, 31, 22.
page 56

ALL IN ONE
daily
weekly
yearly
astro
PROGRAM

WEB
SERVER

Wi-Fi
2.4 GHz




EAN code
SHT-13/1: 8595188189071
SHT-13/2: 8595188184854


Technical parameters	SHT-13/1	SHT-13/2
Supply terminals:	A1-A2	
Supply voltage:	AC/DC 24 – 240 V (AC 50-60 Hz)	
Consumption (max.):	Wi-Fi "OFF" 0.5 W/2 VA "ON" 1 W/3 VA	
Supply voltage tolerance:	–15 %; +10 %	
Output		
Contact type:	1x changeover (AgSnO ₂)	2x changeover (AgSnO ₂)
Current rating:	16 A/AC1; 1 HP 240 Vac, 1/2 HP 120 Vac; PD. B300	
Breaking capacity:	4000 VA/AC1, 384 W/DC1	
Inrush current:	30 A/< 3 s	
Switching voltage:	250 V AC/24 V DC	
Power dissipation (max.):	1.2 W	2.4 W
Mechanical life:	30.000.000 ops.	
Electrical life (AC1):	100.000 ops.	
Time circuit		
Accuracy:	max. ±0.5 s/day at 23°C (73.4 °F)	
Min. switching interval:	1 s	
Data retention time:	min. 10 years	
Set time backup:	up to half a year with 60 outages (CR 2032 - 3V)	
Program circuit		
Number of memory locations:	200 - time programs, 30 - holidays	
Program type:	daily, weekly, yearly, astro	
Displayed data:	LCD display with white backlight	
Settings via website:	by Wi-Fi (2.4 GHz)	
Other information		
Operating temperature:	–20 .. +55 °C (–4 .. 131 °F)	
Storage temperature:	–30 .. +70 °C (–22 .. 158 °F)	
Dielectric strength:		
supply – output	AC 4 kV	
output 1 – output 2	AC 4 kV	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Protection degree:	IP40 front panel / IP20 terminals	
Overvoltage category:	III.	
Pollution degree:	2	
Cross-wire section – solid/ stranded with ferrule (mm²):	max. 1× 2.5, 2× 1.5/ max. 1× 2.5 (AWG 14)	
Dimensions:	90 × 35 × 64 mm (3.5" × 1.4" × 2.5")	
Weight:	122 g (4.3 oz)	135 g (4.8 oz)
Standards:	EN 61812-1	

Symbol

SHT-13/1




SHT-13/2




- All programs in one device (daily, weekly, yearly and astronomical).
- UNiversal supply voltage in range of AC/DC 24 – 240 V (AC 50-60 Hz).
- Simple setting after the first start-up.
- User replaceable battery to back up the set time during power outages.
- Built-in web server for setup and control via Wi-Fi connection.
- Time synchronization through NTP server (require internet connection).
- Possibility of permanent connection to the local network.
- New well-arranged display with white backlight.
- ASTROnomic program: manual entry of coordinates or selecting from one of more than 500 preset cities.
 - selection of days of the week
 - astro interrupt function (night break): controls the sunrise/sunset times and compares them with the set OFF/ON times
 - high position accuracy thanks to two decimal places in latitude/logitude
- One/two channel design (each with an operating hours counter).
- Pulse/cycle output mode.
- Transition of summer/winter time – AUTO or OFF.
- Sealable transparent front panel cover.
- PIN code protection against unauthorized changes.
- Wireless firmware update - **current version 1.46**

Description

SHT-13/2

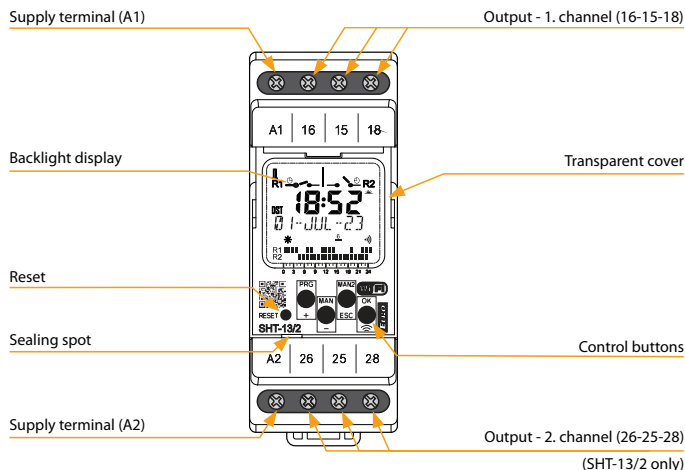


Description of displayed elements

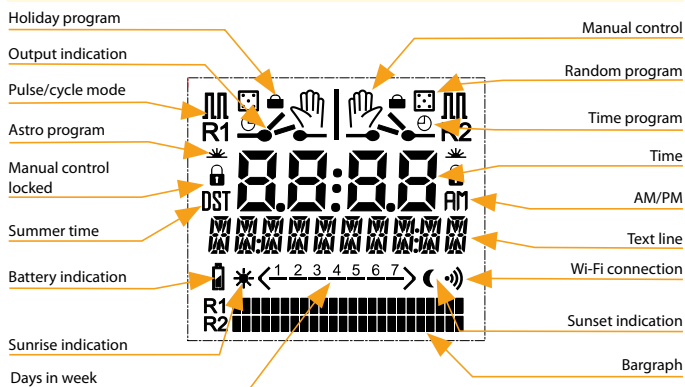


Connection

SHT-13/1

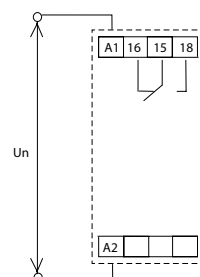

SHT-13/2



POWER SUPPLIES

Switching power supplies
DC, unregulated

Voltage 12 V



PS1M-15/12V
Input: AC 100 - 240 V
Output: DC 12 V stab.
Load: 1.25 A/15 W.
- short circuit protection
- overload protection
- overvoltage protection
page 53



PS2M-24/12V
Input: AC 100 - 240 V
Output: DC 12 V stab.
Load: 2 A/24 W.
- short circuit protection
- overload protection
- overvoltage protection
page 53



PS3M-54/12V
Input: AC 100-240 V
Output: DC 12V stab.
Load: 4.5 A/54 W.
- short circuit protection
- overload protection
- overvoltage protection
page 53



PS4M-85/12V
Input: AC 100-240 V
Output: DC 12 V stab.
Load: 7.1 A/85 W.
- short circuit protection
- overload protection
- overvoltage protection
page 53



PS6M-135/12V
Input: AC 100-240 V
Output: DC 12V stab.
Load: 10.2 A/122W.
- short circuit protection
- overload protection
- overvoltage protection
page 53

Voltage 24 V



PS1M-15/24V
Input: AC 100 - 240 V
Input: DC 24 V stab.
Load: 0.625 A/15 W.
- short circuit protection
- overload protection
- overvoltage protection
page 53



PS2M-30/24V
Input: AC 100 - 240 V
Input: DC 24 V stable
Load: 1.25 A/30 W.
- short circuit protection
- overload protection
- overvoltage protection
page 53



PS3M-60/24V
Input: AC 100-240 V
Input: DC 24 V stab.
Load: 2.5 A/60 W.
- short circuit protection
- overload protection
- overvoltage protection
page 53



PS4M-92/24V
Input: AC 100 - 240 V
Input: DC 24 V stab.
Load: 3.83 A/92 W
- short circuit protection
- overload protection
- overvoltage protection
page 53



PS6M-150/24V
Input: AC 100-240 V
Output: DC 24V stab.
Load: 5.3 A/127W.
- short circuit protection
- overload protection
- overvoltage protection
page 53

Type	Design	Supply voltage	Galvanically isolated	Output					Output protection against			Description	Page
				Analog	Switching	Stabilized DC	Output voltage	Loadability	Overcurrent	Short circuit	Temperature		
PS1M-15/12V	1M-DIN	AC 100 - 240 V	X	X	●	●	DC 12 V	1.25 A	●	●	X	Fixed output voltage DC 12 V. Power: 15 W.	53
PS1M-15/24V	1M-DIN	AC 100 - 240 V	X	X	●	●	DC 24 V	0.625 A	●	●	X	Fixed output voltage DC 24 V. Power: 15 W.	
PS2M-24/12V	2M-DIN	AC 100 - 240 V	X	X	●	●	DC 12 V	2 A	●	●	X	Fixed output voltage DC 12 V. Power: 24 W.	
PS2M-30/24V	2M-DIN	AC 100 - 240 V	X	X	●	●	DC 24 V	1.25 A	●	●	X	Fixed output voltage DC 24 V. Power: 30 W.	
PS3M-54/12V	3M-DIN	AC 100 - 240 V	X	X	●	●	DC 12 V	4.5 A	●	●	X	Fixed output voltage DC 12 V. Power: 54 W.	
PS3M-60/24V	3M-DIN	AC 100 - 240 V	X	X	●	●	DC 24 V	2.5 A	●	●	X	Fixed output voltage DC 24 V. Power: 60 W.	
PS4M-85/12V	4M-DIN	AC 100 - 240 V	X	X	●	●	DC 12 V	7.1 A	●	●	X	Fixed output voltage DC 12V. Power: 85 W.	
PS4M-92/24V	4M-DIN	AC 100 - 240 V	X	X	●	●	DC 24 V	3.83 A	●	●	X	Fixed output voltage DC 24 V. Power: 92 W.	
PS6M-135/12V	6M-DIN	AC 100 - 240 V	X	X	●	●	DC 12 V	10.2 A	●	●	X	Fixed output voltage DC 12 V. Power: 122 W (120 V), 135 W (230 V)	
PS6M-150/24V	6M-DIN	AC 100 - 240 V	X	X	●	●	DC 24 V	5.3 A	●	●	X	Fixed output voltage DC 12V. Power: 85 W.	



EAN code
 PS1M-15/12V: 8595188180474
 PS1M-15/24V: 8595188180481
 PS2M-24/12V: 8595188180498
 PS2M-30/24V: 8595188180504
 PS3M-54/12V: 8595188180511
 PS3M-60/24V: 8595188180528
 PS4M-85/12V: 8595188180535
 PS4M-92/24V: 8595188180542
 PS6M-135/12V: 8595188199698
 PS6M-150/24V: 8595188199704



- Rated output voltage 12 or 24V DC with the possibility of regulation.
- High efficiency of up to 90%.
- Low ripple & noise.
- Protection: Over load, Over voltage and Short circuit.
- Continuously adjustable output voltage to adapt to the specific application, e.g. the need to compensate for the voltage drop caused by the length of the line.

Technical parameters

Input										
Voltage range:	AC 100 - 240 V (50/60 Hz), DC 145 - 330 V									
Tolerance:	± 10%									
Efficiency:	85%	86%	88%	89%	88%	90%	88%	90%	89%	90%
Consumption without load (max.):	0.3W/4VA	0.5W/4VA	0.3W/8VA	0.4W/8VA	0.3W/7VA	0.5W/6.5VA	0.4W/11VA	0.1W/12VA	TBD	TBD
Consumption with full load (max.):	16W/30VA	17.5W/32VA	30W/50VA	33W/60VA	60W/95VA	70W/111VA	95W/150VA	105W/160VA	TBD	TBD
Inrush current:****	max. 25A at 115V AC/60Hz max. 45A at 240V AC/50Hz				max. 30A at 115V AC/60Hz max. 60A at 240V AC/50Hz		max. 35A at 115V AC/60Hz max. 70A at 240V AC/50Hz		max. 35A at 115V AC/60Hz max. 70A at 240V AC/50Hz	
Output										
Rated voltage:**	12V DC	24V DC	12V DC	24V DC	12V DC	24V DC	12V DC	24V DC	12V DC	24V DC
Voltage setting range:	11 - 13V	23 - 25V	11 - 13V	23 - 25V	11.4 - 12.6V	22.8 - 25.2V	11 - 13V	23 - 25V	11 - 13V	23 - 25V
Rated current:	1.25A	0.625A	2A	1.25A	4.5A	2.5A	7.1A	3.83A	11.3A/230V 10.2A/120V	6.25A/230V 5.3A/120V
Rated power:	15W	15W	24W	30W	54W	60W	85W	92W	135W	150W
Ripple & Noise:	120mV	150mV	120mV	150mV	120mV	150mV	120mV	150mV	100mV	150mV
Output indication:	blue LED		blue LED		green LED		blue LED		blue LED	
Tolerance of output voltage:	5 %									
Overload protection:	from 130 % - 200% rated output power									
Overvoltage protection:	from 110 % - 145% rated output power								from 105 % - 135% rated output power	
Overcurrent protection:	from 110 % - 180% rated output power									
Short circuit protection:	temporarily disconnecting the output									
Other information										
Operating temperature:***	-20 .. +50°C (-4 .. 122 °F)									
Operating humidity:	20% ~ 90% RH non-condensing									
Storage temperature:	-40 .. +80°C (-40 .. 176 °F)									
Dielectric strength:	3kV AC									
Insulation resistance:	100M Ω/500V DC/25°C (77°F)/70% RH									
Overvoltage category:	III.									
Pollution degree:	2									
Max. cable size:	max. 1x 2.5 mm², max. 2x 1.5 mm² solid wire/with sleeve max. 1x 2,5 mm²									
Terminal torque:										
input terminals	0.5 Nm		0.3 Nm		0.3 Nm		0.3 Nm		0.3 Nm	
output terminals	0.5 Nm									
Protection degree:	IP20									
MTBF:	200 000 hours minimum, full load at 25°C ambient temperature									
Mounting:	DIN rail EN 60715									
Dimensions:	90 x 18 x 58 mm (3.5" x 0.71" x 2.3")		90 x 35 x 58 mm (3.5" x 1.4" x 2.3")		90 x 52.5 x 58 mm (3.5" x 2.1" x 2.3")		90 x 70 x 58 mm (3.5" x 2.8" x 2.3")		90 x 105 x 58 mm (3.5" x 4.1" x 2.3")	
Weight:	78 g (2.8 oz)		120 g (4.2 oz)		190 g (6.7 oz)		270 g (9.5 oz)		380 g (13.8 oz)	
Standards:	IEC60950-1, UL62368-1, TUV EN61558-2-16									

* PS6M-135/12V & PS6M-150/24V on request


** different rated voltage on request: PS1M, PS2M, PS3M - 5V, 15V, 48V; PS4M, PS6M - 15V, 48V

*** PS6M - max. operating temperature limited to 45°C (113°F)


**** the stated values are valid for the full load from the source

PS1M, PS2M, PS3M, PS4M, PS6M | Switching power supplies DC - unregulated







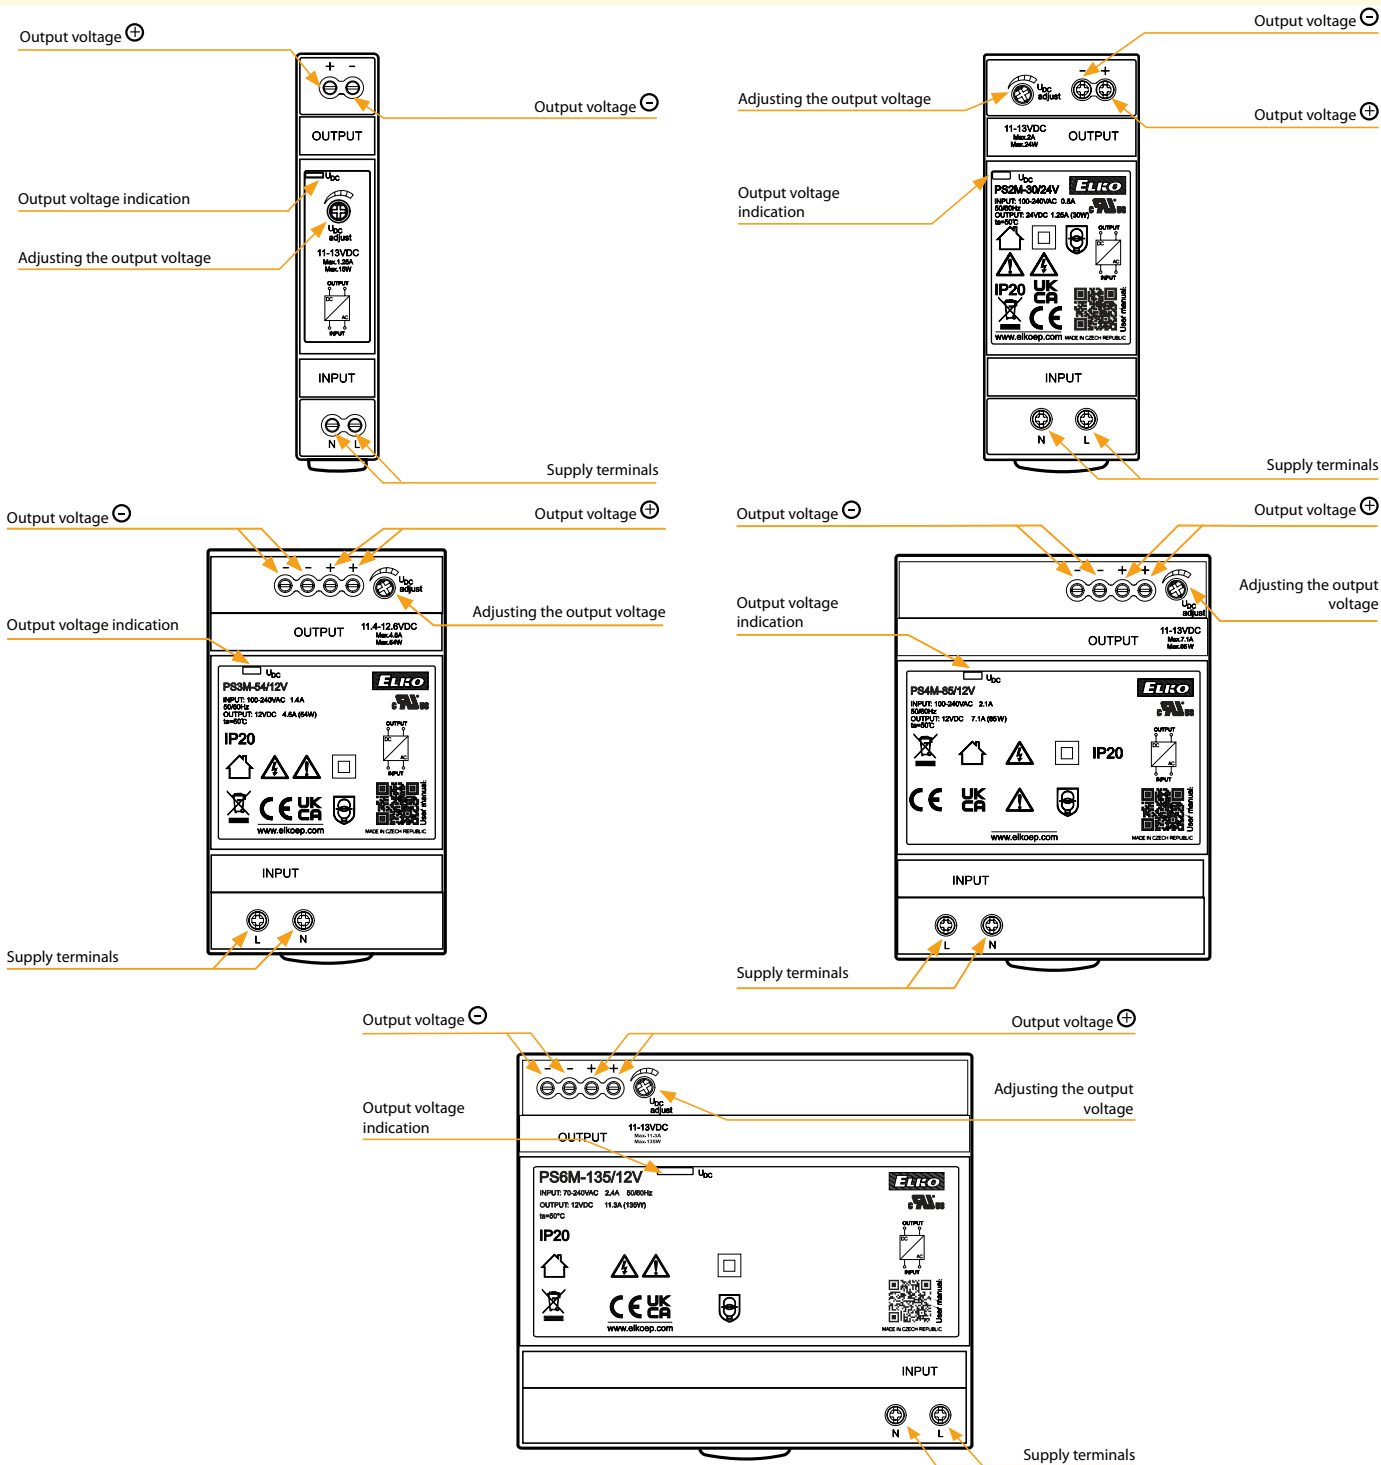Description

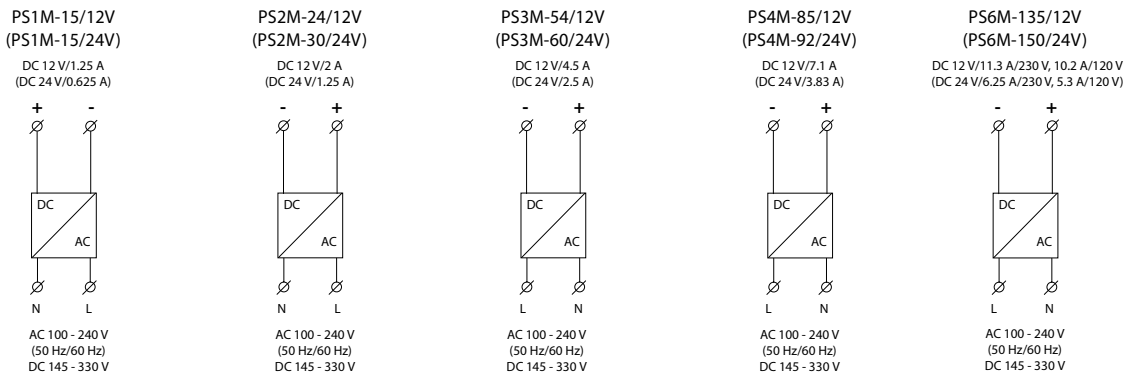

Connection



Explanation of symbols

TYPE OF LOAD (symbols)	bulbs, halogen lamps	low-voltage el.bulbs 12/24V wound transformers	low-voltage el.bulbs 12/24V electronic transformers	ESL dimmable compact fluorescent lamps	Dimmable LED bulbs (triac dimmer)	Dimmable LED bulbs (dimmer with MOSFET)
	 R	 L	 C	 ESL	 LED ¹	 LED ²

Demonstrated symbols are informative

Explanation:



Dimmer with designated load:

R - resistive

L - inductive

C - capacitive

ESL - energy saving bulbs

LED¹ - dimmable LED bulbs, designed for dimmers with phase-controlled rising edge (triac dimmers)

LED² - dimmable LED bulbs designed for dimmers with phase or phase-to-phase phase control (dimmers with MOSFET).

IPxx protection - under normal conditions: normal conditions are understood as such conditions of operating an electrical device, installation and power supply network for which the entire device is designed, produced and installed. Upon these normal conditions of use and upon normal maintenance, all protective devices must be effective throughout the entire expected service life of the product.

Recommendation for mounting modular dimmers: leave a gap of min. 0.5 module (approx. 9 mm / 0.4") on side of the device to ensure better cooling of the device.

VS120, VS220, VS425, VS440, VS463 | Installation contactors



- For switching electric circuits, especially for resistive loads and 3-phase induction motors
- Number of contacts: **VS120** - 1, **VS220** - 2, **VS325, VS340, VS363** - 3, **VS425, VS440, VS463** - 4
- It is produced in configuration of switching and breaking contacts:
VS120: 10, 01 **VS220:** 20, 11, 02
VS325: 30 **VS425:** 40, 31, 22, 13 04
VS340: 30 **VS440:** 40, 31, 22, 04
VS363: 30 **VS463:** 40, 31, 22
- It is possible to connect auxiliary contacts VSK to contactors VS425, VS440, VS463

EAN code
see page 38

Technical parameters	VS120	VS220	VS325/VS425	VS340/VS440	VS363/VS463
Rated insulation voltage (Ui):	230 V	230 V	440 V	440 V	440 V
Rated thermo-current I_{th} (in AC):	20 A	20 A	25 A	40 A	63 A
Voltage range:	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz

Switched operation

AC-1 for 400 V, 3 phase:	x	x	16 kW	26 kW	40 kW
AC-1 for 230 V:	4 kW, 1 phase	4 kW, 1 phase	9 kW, 3 phase	16 kW, 3 phase	24 kW, 3 phase
AC-3 for 400 V, 3 phase:	x	x	4 kW	11 kW	15 kW
AC-3 for 230 V:	1.3 kW only NO, 1 phase	1.3 kW only NO, 1 phase	2.2 kW, 3 phase	5.5 kW, 3 phase	8.5 kW, 3 phase
AC-7a for 400 V, 3 phase:	x	x	16 kW	26 kW	40 kW
AC-7a for 230 V:	4 kW, 1 phase	4 kW, 1 phase	9 kW, 3 phase	16 kW, 3 phase	24 kW, 3 phase
AC-7b for 400 V, 3 phase:	x	x	4 kW	11 kW	15 kW
AC-7b for 230 V:	1.3 kW only NO, 1 phase	1.3 kW only NO, 1 phase	2.2 kW, 3 phase	5.5 kW, 3 phase	8.5 kW, 3 phase
AC-15 for 400 V, 1 phase:	4 A	4 A	4 A	4 A	4 A
AC-15 for 230 V, 1 phase:	6 A	6 A	6 A	6 A	6 A
DC1 $U_e = 24/110/220$ V:	20/6/0.6 A	20/6/0.6 A	25/6/0.6 A	40/4/1.2 A	63/4/1.2 A
Loadability of modular contactors see page 58					
The max. number of switching for max. load:	600 switch/hr.	600 switch/hr.	600 switch/hr.	600 switch/hr.	600 switch/hr.

Electrical life in 230/400 V

AC-1- resistive load :	200.000	200.000	200.000	100.000	100.000
AC-3-power load:	300.000	300.000	500.000	500.000	150.000
AC-5a - high-intensity discharge lamp:	100.000 by 30 μ F	100.000 by 30 μ F	100.000 by 36 μ F	100.000 by 220 μ F	100.000 by 330 μ F
AC-5b - incandescent lamps:	100.000 by 2 kW	100.000 by 2 kW	100.000 by 2 kW	100.000 by 4 kW	100.000 by 5 kW
AC-7a - resistive household devices:	200.000	200.000	200.000	100.000	100.000
AC-7b - inductive household devices:	300.000	300.000	300.000	150.000	150.000
Minimal load:	≥ 17 V, ≥ 50 mA	≥ 17 V, ≥ 50 mA	≥ 17 V, ≥ 50 mA	≥ 17 V, ≥ 50 mA	≥ 24 V, ≥ 100 mA
Short circuit protection with the fuse char. aM:	20 A	20 A	25 A	63 A	80 A
Coordination Type according EN 60 947-4-1:	2	2	2	2	2
Dielectric strenght:	4 kV	4 kV	4 kV	4 kV	4 kV

Contacts - max. cable size

Solid conductor:	AWG 7 (10 mm ²)	AWG 7 (10 mm ²)	AWG 10 (10 mm ²)	AWG 10 (25 mm ²)	AWG 10 (25 mm ²)
Stranded conductor:	AWG 8 (6 mm ²)	AWG 8 (6 mm ²)	AWG 8 (6 mm ²)	AWG 4 (16 mm ²)	AWG 4 (16 mm ²)
Maximal torque:	1.2 Nm (10.62 lbf.in)	1.2 Nm (10.62 lbf.in)	1.2 Nm (10.62 lbf.in)	3.5 Nm (30.95 lbf.in)	3.5 Nm (30.95 lbf.in)

Coil - max. cable size

Solid conductor:	AWG 14 (2.5 mm ²)	AWG 14 (2.5 mm ²)	AWG 14 (2.5 mm ²)	AWG 14 (2.5 mm ²)	AWG 14 (2.5 mm ²)
Stranded conductor:	AWG 14 (2.5 mm ²)	AWG 14 (2.5 mm ²)	AWG 14 (2.5 mm ²)	AWG 14 (2.5 mm ²)	AWG 14 (2.5 mm ²)
Max. torque:	0.6 Nm (5.31 lbf.in)	0.6 Nm (5.31 lbf.in)	0.6 Nm (5.31 lbf.in)	0.6 Nm (5.31 lbf.in)	0.6 Nm (5.31 lbf.in)

Operating

Coil control voltage:	AC/DC 24 V, 120 V, 230 V	AC/DC 24 V, 48 V, 120 V, 230 V	AC/DC 24 V, 48 V, 120 V, 230 V	AC/DC 24 V, 120 V, 230 V	AC/DC 24 V, 48 V, 120 V, 230 V
Coil permanent supply +/- 10 %:	2.1 VA/2.1 W	2.1 VA/2.1 W	2.6 VA/2.6 W *	5 VA/5 W	5 VA/5 W
Coil gear supply +/- 10 %:	2.1 VA/2.1 W	2.1 VA/2.1 W	2.6 VA/2.6 W *	5 VA/5 W	5 VA/5 W
Mounting side-by-side:	max. 2 contactors**	max. 2 contactors**	max. 2 contactors**	max. 2 contactors**	max. 2 contactors**
Operational temperature:	-5 .. +55 °C (23 .. 131 °F)				
Storing temperature:	-30 .. +80 °C (-22 .. 176 °F)				
Weight:	120 g (4.2 oz.)	130 g (4.6 oz.)	213 g (7.5 oz.)	400 g (14 oz.)	400 g (14 oz.)
Dimensions:	17.5 x 85 x 60 mm (0.7" x 3.35" x 2.4")	17.5 x 85 x 60 mm (0.7" x 3.35" x 2.4")	35 x 85 x 60 mm (1.4" x 3.35" x 2.4")	53.3 x 84 x 60 mm (2.1" x 3.31" x 2.4")	53.3 x 84 x 60 mm (2.1" x 3.31" x 2.4")
Standards:	IEC 60947-4-1, IEC 60947-5-1, IEC 61095, EN 60947-4-1, EN 60947-5-1, EN 61095, EN 60947-1				

* 3.8 VA/3.8 W for -04 version of contacts

** Note: If several contactors are mounted close together a gap of 9 mm must be maintained between every other contactor.



*** HP rating: VS120 & VS220: 1-phase 1 HP|240 Vac, 1/3 HP|120 Vac; PD. B300, P300

VS325 & VS425: 1-phase 1 HP|240 Vac, 1/3 HP|120 Vac; 3-phase 3 HP|240 Vac, 5 HP|460 Vac; PD. B300, P300


VS340 & VS440: 1-phase 3 HP|240 Vac, 1 HP|120 Vac; 3-phase 7 HP|240 Vac, 15 HP|460 Vac; PD. B300, P300

VS363 & VS463: 1-phase 5 HP|240 Vac, 2 HP|120 Vac; 3-phase 10 HP|240 Vac, 20 HP|460 Vac; PD. B300, P300




VS120




VS325

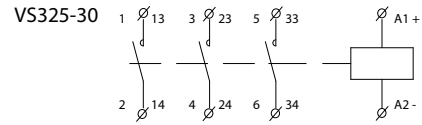






VS220







VS340




VS425

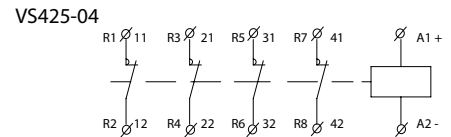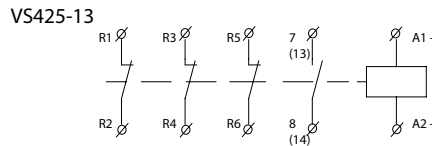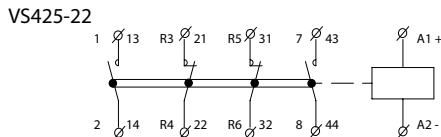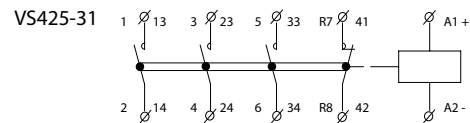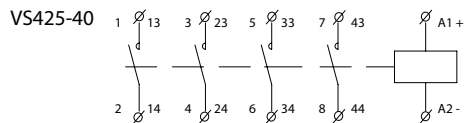




VS440

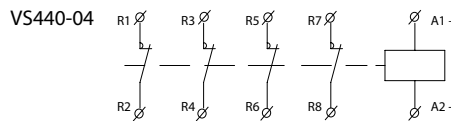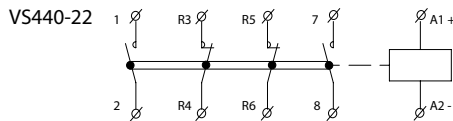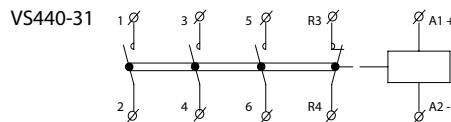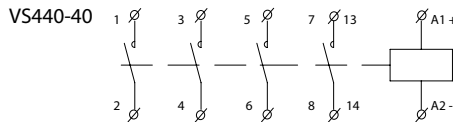

VS363



VS463

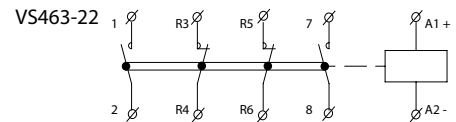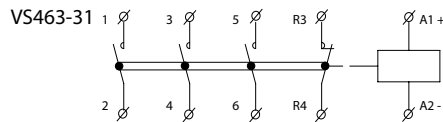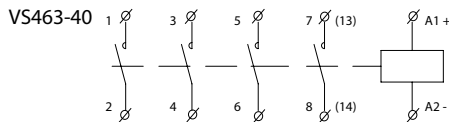

Auxiliary contacts for VS425, VS440, VS463

Datas of auxiliary contacts for VSK-11 and VSK-20

Ambient temperature:	-5 .. +55 °C (23 .. 131 °F)
Rated insulation voltage (Ui):	500 V
Dielectric strength:	4 kV
Rated current 230 V (AC 15):	6 A
Rated current 400 V (AC 15):	4 A
Max. switching frequency:	6 A
The max. number of switching for max. load:	600 sep./hod.
Minimal load:	≥ 12 V, ≥ 10 mA
Short circuit protection with the fuse char. aM:	6 A
Solid/Stranded conductor (max):	2.5 mm ² /2.5 mm ² (AWG 10)
Maximal torque:	0.8 Nm
Weight:	10 g (0.35 oz.)
Dimensions:	10 x 85 x 60 mm (0.4" x 3.35" x 2.4")


Connection of auxiliary contact VSK-11 and VSK-20

EAN code
see page 59

VSK-11



VSK-20



Number of lights on one contactor's contact

TYPE OF LIGHT	OUTPUT (W)	I (A)	VS120	VS220	VS425	VS440	VS463
Incandescent lamps	60	0.26	33	33	33	65	85
	100	0.43	20	20	20	40	50
	200	0.87	10	10	10	20	25
	500	2.17	3	3	3	8	10
	1000	4.35	1	1	1	4	5
Flourescent lamps	18	0.37	22	22	24	90	140
	24	0.35	22	22	24	90	140
	36	0.43	17	17	20	65	95
	58	0.67	14	14	17	45	70
Flourescent lamps lead-lag circuit	18	0.11	2 x 30	2 x 30	2 x 40	2 x 100	2 x 150
	24	0.14	2 x 24	2 x 24	2 x 31	2 x 78	2 x 118
	36	0.22	2 x 17	2 x 17	2 x 24	2 x 65	2 x 95
	58	0.35	2 x 10	2 x 10	2 x 14	2 x 40	2 x 60
Flourescent lamps parallel correction	18	0.12	7	7	8	48	73
	24	0.15	7	7	8	48	73
	36	0.2	7	7	8	48	73
	58	0.32	4	4	5	31	47
Flourescent lamps with electronic ballast units (EVG)	1 x 18	0.09	25	25	35	100	140
	1 x 36	0.16	15	15	20	52	75
	1 x 58	0.25	14	14	19	50	72
	2 x 18	0.17	12	12	17	50	70
	2 x 36	0.32	7	7	10	26	38
	2 x 58	0.49	7	7	9	25	36
High-pressure mercury-vapour lamps uncorrected	50	0.61	14	14	18	38	55
	80	0.8	10	10	13	29	42
	125	1.15	7	7	9	20	29
	250	2.15	4	4	5	10	15
	400	3.25	2	2	3	7	10
	700	5.4	1	1	2	4	6
High-pressure mercury-vapour lamps parallel correction	1000	7.5	1	1	1	3	4
	50	0.28	4	4	5	31	47
	80	0.41	4	4	5	27	41
	125	0.65	3	3	4	22	33
	250	1.22	1	1	2	12	18
	400	1.95	1	1	1	9	13
Halogen metal vapour lamps uncorrected	700	3.45	-	-	-	5	7
	1000	4.8	-	-	-	4	5
	35	0.53	18	18	22	43	60
	70	1	10	10	12	23	32
	150	1.8	5	5	7	12	18
	250	3	3	3	4	7	10
Halogen metal-vapour lamps parallel correction	400	3.5	3	3	3	6	9
	1000	9.5	1	1	1	2	3
	2000	16.5	-	-	-	1	1
	35	0.25	5	5	6	36	50
	70	0.45	2	2	3	18	25
	150	0.75	1	1	1	11	15
High-pressure sodium-vapour lamps uncorrected	250	1.5	-	-	1	6	9
	400	2.5	-	-	1	6	8
	1000	5.8	-	-	-	2	3
	2000	11.5	-	-	-	1	2
	150	1.8	5	5	6	17	22
	250	3	3	3	4	10	13
High-pressure sodium-vapour lamps parallel correction	400	4.7	2	2	2	6	8
	1000	10.3	-	-	1	3	3
	150	0.83	1	1	1	11	16
	250	1.5	-	-	1	6	10
Low-pressure sodium-vapour lamps uncorrected	400	2.4	-	-	-	4	6
	1000	6.3	-	-	-	2	3
	18	0.35	22	22	27	71	90
	35	1.5	7	7	9	23	30
	55	1.5	7	7	9	23	30
	90	2.4	4	4	5	14	19
Low-pressure sodium-vapour lamps parallel correction	135	3.5	3	3	4	10	13
	180	3.3	3	3	4	10	13
	18	0.35	6	6	7	44	66
	35	0.31	1	1	1	11	16
	55	0.42	1	1	1	11	16
	90	0.63	1	1	1	8	12
Low-pressure sodium-vapour lamps parallel correction	135	0.94	-	-	-	4	7
	180	1.16	-	-	-	5	8

EAN codes for VS



VS120

VS120-10UL 230V AC/DC: 8595188189880
VS120-10UL 120V AC/DC: 8595188189897
VS120-10UL 24V AC/DC: 8595188189903

VS120-01UL 230V AC/DC: 8595188189910
VS120-01UL 120V AC/DC: 8595188189927
VS120-01UL 24V AC/DC: 8595188189934

VS220

VS220-20UL 230V AC/DC: 8595188189828
VS220-20UL 120V AC/DC: 8595188189835
VS220-20UL 24V AC/DC: 8595188189842

VS220-11UL 230V AC/DC: 8595188189859
VS220-11UL 120V AC/DC: 8595188189866
VS220-11UL 24V AC/DC: 8595188189873

VS220-02UL 230V AC/DC: 8595188189941
VS220-02UL 120V AC/DC: 8595188189958
VS220-02UL 24V AC/DC: 8595188189965

VS325

VS325-30UL 230V AC/DC: 8595188190039
VS325-30UL 120V AC/DC: 8595188190046
VS325-30UL 24V AC/DC: 8595188190053

VS425

VS425-40UL 230V AC/DC: 8595188189972
VS425-40UL 120V AC/DC: 8595188189989
VS425-40UL 24V AC/DC: 8595188189996

VS425-31UL 230V AC/DC: 8595188190008
VS425-31UL 120V AC/DC: 8595188190015
VS425-31UL 24V AC/DC: 8595188190022

VS425-22UL 230V AC/DC: 8595188190060
VS425-22UL 120V AC/DC: 8595188190077
VS425-22UL 24V AC/DC: 8595188190084

VS425-04UL 230V AC/DC: 8595188190091
VS425-04UL 120V AC/DC: 8595188190107
VS425-04UL 24V AC/DC: 8595188190114

VS440

VS440-40UL 230V AC/DC: 8595188190121
VS440-40UL 120V AC/DC: 8595188190138
VS440-40UL 24V AC/DC: 8595188190145

VS440-31UL 230V AC/DC: 8595188190152
VS440-31UL 120V AC/DC: 8595188190169
VS440-31UL 24V AC/DC: 8595188190176

VS440-22UL 230V AC/DC: 8595188190213
VS440-22UL 120V AC/DC: 8595188190220
VS440-22UL 24V AC/DC: 8595188190237

VS440-04UL 230V AC/DC: 8595188190244
VS440-04UL 120V AC/DC: 8595188190251
VS440-04UL 24V AC/DC: 8595188190268

VS363

VS363-30UL 230V AC/DC: 8595188190336
VS363-30UL 120V AC/DC: 8595188190343
VS363-30UL 24V AC/DC: 8595188190350

VS463

VS463-40UL 230V AC/DC: 8595188190275
VS463-40UL 120V AC/DC: 8595188190282
VS463-40UL 24V AC/DC: 8595188190299

VS463-31UL 230V AC/DC: 8595188190305
VS463-31UL 120V AC/DC: 8595188190312
VS463-31UL 24V AC/DC: 8595188190329

VS463-22UL 230V AC/DC: 8595188190367
VS463-22UL 120V AC/DC: 8595188190374
VS463-22UL 24V AC/DC: 8595188190381

VS340

VS340-30UL 230V AC/DC: 8595188190183
VS340-30UL 120V AC/DC: 8595188190190
VS340-30UL 24V AC/DC: 8595188190206

EAN codes for VSK and covers

VSK-11: 8595188121613
VSK-20: 8595188121606

Explore out best-selling non-UL products, including high-quality relays and other essential components.

Trusted by professionals across the U.S. market and providing reliable performance and exceptional value for various applications.



CRM-91HE
(10 functions)
**Multifunction Timer Relay
with External Potentiometer**



- Control by external control unit - potentiometer (can be placed/mounted for example on switch board doors or in panel).



CRM-2HE
(2 functions)
**Asymmetric Flasher with
External Potentiometers**



- Control by external control unit - potentiometer (can be placed/mounted for example on switch board doors or in panel).



CRM-9S
(10 functions)
**Multifunction
Timer Relay**



- Multifunction time relay for universal use in automation, control, and regulation or in-house installations.



HRN-100
(4-wire connection)
**Multifunction Voltage
Monitoring Relay in 3P with
LCD Display**



- Multifunction and in many ways universal monitoring relay which protects devices and equipment connected to a 3-phase network.



HRH-5

(2 functions)

Asymmetric Flasher with External Potentiometers



- Control by external control unit - potentiometer (can be placed/ mounted for example on switch board doors or in panel).



MR-41 MR-42

Memory Relays



- Relays MR-41, MR-42 memorize its last state even after supply failure. During the failure relay will turn off and after re-energizing will automatically turns on.



TER-7

(10 functions)

Temperature Monitoring Thermostat



- It monitors motor coil temperature.
- Fixed levels of switching.



TER-9

(10 functions)

Digital Thermostat



- Digital thermostat with 6 functions and built-in time switch clock with day, week and year program. You can also limit temperature functions and courses this way in real time.



SJR-2

(10 functions)

ON DELAY Time Relay



- For gradual switching of high power, prevents current strokes in the main.

Explore out best-selling non-UL products, including high-quality relays and other essential components.

Trusted by professionals across the U.S. market and providing reliable performance and exceptional value for various applications.



CRM-91HE
(10 functions)
Multifunction Timer Relay with External Potentiometer



- Control by external control unit - potentiometer (can be placed/mounted for example on switch board doors or in panel).



CRM-2HE
(2 functions)
Asymmetric Flasher with External Potentiometers



- Control by external control unit - potentiometer (can be placed/mounted for example on switch board doors or in panel).



CRM-9S
(10 functions)
Multifunction Timer Relay



- Multifunction time relay for universal use in automation, control, and regulation or in-house installations.



HRN-100
(4-wire connection)
Multifunction Voltage Monitoring Relay in 3P with LCD Display



- Multifunction and in many ways universal monitoring relay which protects devices and equipment connected to a 3-phase network.



HRH-5

(2 functions)
Asymmetric Flasher with
External Potentiometers



- Control by external control unit - potentiometer (can be placed/ mounted for example on switch board doors or in panel).



MR-41 MR-42

Memory Relays



- Relays MR-41, MR-42 memorize its last state even after supply failure. During the failure relay will turn off and after re-energizing will automatically turns on.



TER-7

(10 functions)
Temperature
Monitoring Thermostat



- It monitors motor coil temperature.
- Fixed levels of switching.



TER-9

(10 functions)
Digital Thermostat



- Digital thermostat with 6 functions and built-in time switch clock with day, week and year program. You can also limit temperature functions and courses this way in real time.



SJR-2

(10 functions)
ON DELAY Time Relay



- For gradual switching of high power, prevents current strokes in the main.



SHT-14/1

Multifunction Time Switch
with Wi-Fi connection



- To control switching based on predefined time programs or sunrise/sunset with the possibility of a night pause. In addition, with the possibility to control and configure from anywhere thanks to Wi-Fi connection (WRC).



HRN-31
(replaces HRN-33, -63)
**1P AC/DC Multifunction
Voltage Monitoring Relay**

Described Function
Overvoltage Monitoring

Manufacturing
CNC Machining Center

- Prevents CNC machine control unit damage by monitoring for states above the voltage limit.
- Maintains operational precision, reduces downtime, and repair costs by ensuring voltage is within safe limits for the equipment.



HRN-32/2
(replaces HRN-35)
**1P AC/DC Multifunction
Voltage Monitoring Relay**

Described Function
Dual Overvoltage Monitoring

Data Centers
Dual Power Supply Units for Servers

- Prevents CNC machine control unit damage by monitoring for states above the voltage limit.
- Maintains operational precision, reduces downtime, and repair costs by ensuring voltage is within safe limits for the equipment.



HRN-36
(replaces HRN-34, -64)
**1P DC Multifunction
Voltage Monitoring Relay**

Described Function
Overvoltage + Latch

Public Transportation
Ticket Vending Machines

- Prevents vending machine failure by monitoring for states above the voltage limit.
- Maintains service reliability, reduces downtime, and repair costs by ensuring voltage is within operational safety limits.



HRN-39
(replaces HRN-37, -67)
**1P AC/DC Multifunction
Voltage Monitoring Relay**

Described Function
Undervoltage Monitoring

Healthcare
Medical Laboratory Refrigerators

- Prevents damage to sensitive samples by monitoring for states below the voltage limit.
- Ensures critical temperature control is maintained, reduces risk of sample spoilage, and supports compliance with healthcare standards.



HRN3-81
**3P AC Undervoltage and
Phase Monitoring Relay**

Described Function
Phase Failure Monitoring

Utilities
Electrical Substation Transformer

- Detects phase failure in transformers to prevent damage and maintain power distribution efficiency.
- Ensures consistent electrical supply, reducing the risk of power outages and associated costs by maintaining grid reliability.

**SHT-13 / SHT-13/2****Multifunction Digital Time Switch With Wi-Fi Connection**

Described Function
Smart Control and Monitoring

Conference Rooms**Automated Light Adjustment**

- Adjusts lighting based on schedule meetings and ambient light, ensuring optimal lighting conditions.
- Wi-Fi connectivity allows for remote adjustments and monitoring, providing flexibility and ease of use.

**PRI-34****1P AC Multifunction Current Monitoring Relay**

Described Function
Window

Renewable Energy**Solar Panel Inverters**

- Prevents inverter damage by monitoring for current outside operational ranges.
- Maintains system efficiency, reduces downtime, and repair costs by ensuring current is within safe limits for the equipment.

**HRN3-70****3P AC Overvoltage and Phase Monitoring Relay**

Described Function
Overcurrent with Hysteresis

Construction**Electric Floor Heating**

- Prevents floor heating system overload by monitoring for current beyond safe limits.
- Enhances safety and efficiency, using hysteresis to minimize unnecessary switching, maintaining a consistent and optimal heating environment.

**PMR1-31****1P AC/DC Multifunction Voltage Monitoring Relay**

Described Function
Window + Latch

Industrial Automation**Automated Assembly Line Equipment**

- Monitors voltage levels to ensure automated equipment operates within safe electrical conditions.
- The latch function locks the system in a safe state, requiring a manual restart, preventing damage due to persistent unstable conditions.

**PMR1-36/2****1P DC Multifunction Voltage Monitoring Relay**

Described Function
Dual Window Monitoring

Water Treatment**Pump Control Systems in Water Distribution**

- Ensures pumps operate within precise voltage windows, critical for water flow consistency.
- Dual circuits allow monitoring of two systems, improving reliability and efficiency in water distribution.

Use Cases - Top 10 Relays by US Sales



CRM-161

(10 functions)

**Multifunction
Time Relay**

Described Function
On Delay

Automotive Industry

Assembly line

- Coordination of timing between individual production line stations:
- When one station completes its part of the work (e.g., engine assembly), the timing relay triggers the next station (e.g., body assembly) after a set delay.



CRM-183J ZR

**Singlefunction
Time Relay**

On Delay

Water Treatment and Waste Management

Pumps in a water treatment plant

- Delayed activation of individual pumps:
- When starting multiple pumps (e.g., during the transfer of waste to the biological treatment tanks), the relay ensures that the pumps are activated one after another, with a defined delay.



CRM-2H

**Singlefunction
Time Relay**

Asymmetric Cycler

HVAC Industry

Building ventilation system

- Warehouse cyclic ventilation:
- In rooms that need to be regularly ventilated (e.g., a storage room), the relay can be programmed to regularly turn the ventilation system on and off, allowing for effective and precise control of ventilation cycles.



CRM-82TO

(2 functions)

**Multifunction
Time Relay**

Described Function
Off Delay Without
Supply Voltage

Security Industry

Emergency lighting

- Delayed shutdown of emergency lighting after the main power source is restored:
- It allows the emergency lighting to be powered by a backup source for up to 10 minutes after the main power source is restored, avoiding a complete blackout in case of a repeated power outage.



CRM-91H

(10 functions)

**Multifunction
Time Relay**

Described Function
Impulse Generator

Textile Industry

Fabric feeding machine

- Feeding machine timing:
- The relay generates pulses at a specific interval to ensure precise timing and control of the fabric feeding machine. It guarantees its efficient and reliable operation with precisely set parameters.

**CRM-93H**

(10 functions)

**Multifunction
Time Relay**Described Function
Memory (Impulse) Relay**Elevator Manufacturing**

Passenger elevator

- Floor buttons and consequent elevator movement:
- After pressing a floor button, the relay activates the corresponding circuit and keeps it active even after the impulse ended, keeping the elevator in motion, until a second pulse is received, this time to stop the elevator.

**HRN-56****Voltage
Monitoring Relay****Food Industry**

Motor in an industrial mixer

- Stopping the motor in case of a phase failure:
- In case of a phase failure, the relay stops the mixer motor to prevent any damage that may occur due to its improper rotation.

**PRI-51****Current
Monitoring Relay****Electronics Manufacturing**

Assembly line

- Overcurrent monitoring in component motors:
- In case of overcurrent in the motor of an assembly line component, the relay will turn off this motor to prevent it from overloading or jamming.

**VS116U****Power Relay****Mining industry**

Mining excavator

- Control of mining excavator components:
- The components of an excavator are controlled by massive motors, operating at currents too high to be controlled directly. The relay splits the circuit into a control part and a power part. The control part operates at a low current, which can be handled by the control panel inside the driver's cabin.

**VS308U****Power Relay****Construction**

Construction crane

- Control of mining excavator components:
- The components of an excavator are controlled by massive motors, operating at currents too high to be controlled directly. The relay splits the circuit into a control part and a power part. The control part operates at a low current, which can be handled by the control panel inside the driver's cabin.

Agriculture, Forestry, Farming - Dryers, Grain Processing Machines

Time Relays

- Starting equipment in sequence (inrush current prevention)

Auxiliary Relays

- Electrically separating circuits

Monitoring Relays

- Detecting and preventing overload



Buildings, Complexes, Stadiums, Amusement Parks - Gate & Garage Door Panels

Time Relays

- Delayed start / extended operation

Auxiliary Relays

- Switching single phase load

Monitoring Relays

- Indicating current flow



Car Washing Stations - Compressors

Time Relays

- Cyclic control

Auxiliary Relays

- Utilizing a range of AC/DC supply voltages

Monitoring Relays

- Safe stop / off in case power loss



Cement / Concrete Plants - Grinder / Crusher Motor Auxiliary Heaters / Cooling Fans

Time Relays

- Starting and stopping loads at a specific time of day

Auxiliary Relays

- Electrically separating circuits

Monitoring Relays

- Indicating overcurrent / overvoltage



EV Charging (Station Manufacturing & Servicing) - Fast Charging Station Auxiliary Circuits

Time Relays

- Timing signal lamps, horns

Auxiliary Relays

- Switching single phase load

Monitoring Relays

- Preventing damage in case of overcurrent / overvoltage



Food & Beverage (Production & Processing) – Conveyor Systems, Automated Lines, Injectors, Fillers

Time Relays

- Cyclic light & heat control

Auxiliary Relays

- Utilizing a range of AC/DC supply voltages

Monitoring Relays

- Controlling switching between power sources



Heavy Industry, Metals – High Power Motor Auxiliary Heaters / Cooling Fans

Time Relays

- Starting equipment in sequence (inrush current prevention)

Auxiliary Relays

- Electrically separating circuits

Monitoring Relays

- Detecting and preventing overload



Lighting - High Power Street Lamps

Time Relays

- Delayed start / extended operation

Auxiliary Relays

- Switching single phase load

Monitoring Relays

- Indicating current flow



Mining Sites – Kiln Auxiliary Drives & Heaters

Time Relays

- Cyclic control

Auxiliary Relays

- Electrically separating circuits

Monitoring Relays

- Safe stop / off in case power loss



Oil & gas – Pump Motor Auxiliary Heaters

Time Relays

- Starting and stopping loads at a specific time of day

Auxiliary Relays

- Switching single phase load

Monitoring Relays

- Indicating overcurrent / overvoltage



Plastic Produce – Single Phase DOL Starters

Time Relays

- Cyclic control

Auxiliary Relays

- Utilizing a range of AC/DC supply voltages

Monitoring Relays

- Preventing damage in case of overcurrent / overvoltage



Pulp & paper – DC Drive Field Circuits

Time Relays

- Delayed start / extended operation

Auxiliary Relays

- Electrically separating circuits

Monitoring Relays

- Controlling switching between power sources



Pump stations & Water Treatment Plants – Single Phase Motors & Actuators

Time Relays

- Starting and stopping loads at a specific time of day

Auxiliary Relays

- Switching single phase load

Monitoring Relays

- Preventing damage in case of overcurrent / overvoltage



Renewable Energy (Solar, Wind) – Battery Storage Units

Time Relays

- Timing signal lamps, horns

Auxiliary Relays

- Utilizing a range of AC/DC supply voltages

Monitoring Relays

- Indicating current flow



Warehouse & Other Logistics Operations – Automated Shelving Systems

Time Relays

- Cyclic light & heat control

Auxiliary Relays

- Electrically separating circuits

Monitoring Relays

- Safe stop / off in case power loss



Problematic choice of suitable relay contact for a particular load switched with a product is described below. Mostly we experience problems with incorrect choice of load (meaning incorrect relay for a particular load) which results in permanent switching of contact (sealing) or damage on relay contact – which then results in malfunction.
What load can you use? Detailed types of load according to standard EN 60947 are described in charts below – categories of use.

Category of use	Typical use	EN
AC current, $\cos\phi = P/S$ (-)		
AC-1	Non-inductive or slightly inductive load, resistance furnace Includes all appliances supplied by AC current with power factor ($\cos\phi$) ≥ 0.95 Examples of usage: resistance furnace, industrial loads	60947-4
AC-2	Motors with slip-ring armature, switching off	60947
AC-3	Motors with short-circuit armature, motor switching when in operation This category applies to switching off motors with short-circuit armature while in operation. While switching, contactor switches current which is 5 up to 7 times rated current of motor.	60947-4
AC-4	Electro-motors with short-circuit armature: start up, braking by backset, changeover	60947
AC-5a	Switching of electrical gas-filled lights, fluorescent lights	60947-4
AC-5b	El. bulb switching Enables low contact loading due to resistance of cold fiber is many times smaller than the one of hot fiber.	60947-4
AC-6a	Switching of transformers	60947-4
AC-6b	Switching of capacitors	60947-4
AC-7a	Switching low inductive loads of home appliances and similar applications	60947
AC-7b	Load of motors for home appliances	60947
AC-8a	Switching of hermetically sealed motors of cooling compressors with manual reset switches against overload Hermetically sealed cooling compressors have to be placed in one box without external shaft or shaft padding and motor must operate with cooling liquid	60947
AC-8b	Switching of hermetically sealed motors of cooling compressors with manual reset switches against overload Hermetically sealed cooling compressors have to be placed in one box without external shaft or shaft padding and motor must operate with cooling liquid	60947
AC-12	Switching of semiconductor loads with separation transformers	60947-5
AC-13	Switching of semiconductor loads with separation transformers	60947-5-1
AC-14	Switching of low electro-magnetic loads (max.72 VA)	60947-5-1
AC-15	Management of alternating electro-magnetic loads This category applies to switching inductive loads with input for closed electro-magnetic circuit higher than 72 VA Use: switching coils of contactors	60947-5
AC-20	Connecting and disconnecting in unloaded states	60947-3
AC-21	Switching resistive loads, including low loading	60947-3
AC-22	Switching of mixed resistive and inductive loads, including low overloading	60947-3
AC-23	Switching of motor loads or other high inductive loads	60947-3
AC-53a	Switching of motors with short-circuit armature with semiconductor contactors	60947

DC current, $t = L/R$ (s) Note: Category AC 15 replaces formerly used category AC 11

DC-1	Non-inductive or low inductive load, resistive furnaces	60947-4
DC-3	Shunt motors: start-up, braking by backset, reversion, resistive braking	60947-4-1
DC-5	Series motor: start-up, braking by backset, reversion, resistive braking	60947-4-1
DC-6	Non-inductive or low inductive loads, resistive furnaces – el. bulbs	60947-4-1
DC-12	Management of resistive loads and fixed loads with insulation by opto-electric element	60947-5-1
DC-13	Switching of electromagnets	60947-5-1
DC-14	Switching of electromagnetic loads in circuits with limiting resistor	60947-5-1
DC-20a(b)	Switching and breaking without load(a: frequent switching ,b: occasional switching)	60947-3
DC-21a(b)	Switching ohmic loads including limiting overloading (a: frequent switching ,b: occasional switching)	60947-3
DC-22a(b)	Switching of compound ohmic and inductive loads including limited overloads (e.g. shunt motors) (a: frequent switching, b: random switching)	60947-3
DC-23	Switching of highly inductive loads (e.g. series motors)	60947-3

How can you distinguish for which load is our product (relay) designated?



















Our company record this information on a products and also in our catalog, instruction manual and other promotional and technical material (website etc.).

It is important to realize that it is not always possible to point out load because of lack of information about the device (user cannot measure $\cos\phi$) or it is not possible because of inconstancy of parameters of switched device. Manufacturer of relays records always guaranteed parameters in ideal conditions which are done by a norm (temperature, pressure, humidity, etc.) and reality can be in a lot of cases different. Category of use (classification) of a particular relay is done by material of output contacts.



















Basic types of materials which are used for production of contacts for high-performance relay are:

- AgCd – suitable for switching ohmic loads. Before of harmfulness of Cd, this type of contact is remitted.
- AgNi – designated for switching resistive loads, good quality switching and conducting (contact doesn't oxidate) small currents/voltages, it is not designated for surge currents and loads with inductive component.
- AgSn or AgSnO₂ – suitable for switching loads with inductive component, not suitable for switching small currents/voltages, it is more resistive to surge currents, suitable for DC voltage switching, less suitable for switching loads of ohmic type.
- Wf (wolfram)-special contact designated for switching surge currents with inductive component.
- with gold (AgNi/Au)- Used for "improving" contacts for low currents/ voltages , prevents oxidation.



















CRM-2H; CRM-2T; CRM-181J; CRM-91H; CRM-111H; CRM-183J / CRM-93H / CRM-113H (1. kontakt); CRM-121H; CRM-131H; HRN-31; HRN-31/2; HRN-32/2; HRN-36; HRN-39; HRN3-70; HRN3-80; HRN3-81; PMR1-31; PMR1-31/2; PMR1-36; PMR1-36/2; PMR1-39; PMR1-39/2; PMR3-70; PRI-34; PTRM-216K; PTRM-216T; PTRM-216KP; PTRM-216TP; PTRM-216K; PTRM-216T;

type of load	 cos φ ≥ 0.95			 AC5a uncompensated	 AC5a compensated	 AC5b	 AC6a	 AC7b	 AC12
Material of contact AgNi, 16A	250V/16A	250V/5A	250V/3A	230V/3A (690VA)	x	800W	x	250V/3A	250V/10A
type of load									
Material of contact AgNi, 16A	250V/6A	250V/6A	250V/6A	DC1 24V/16A	DC3 24V/6A	DC5 24V/4A	DC12 24V/16A	DC13 24V/2A	DC14 24V/2A

VS116U

type of load	 cos φ ≥ 0.95			 AC5a uncompensated	 AC5a compensated	 AC5b	 AC6a	 AC7b	 AC12
Material of contact AgSnO ₂ , 16A	250V/16A	250V/5A	250V/3A	230V/3A (690VA)	230V/3A (690VA) till max output C=14uF	1 000W	x	250V/3A	x
type of load									
Material of contact AgSnO ₂ , 16A	x	250V/6A	250V/6A	24V/16A	24V/3A	24V/2A	24V/16A	24V/2A	x

CRM-82TO; CRM-183J / CRM-93H / CRM-113H (2. + 3. kontakt); VS308U; CRM-161; HRN-56; PRI-32; PRI-51;

type of load	 cos φ ≥ 0.95			 AC5a uncompensated	 AC5a compensated	 AC5b	 AC6a	 AC7b	 AC12
Material of contact AgNi, 8A	250V/8A	250V/3A	250V/2A	230V/1.5A (345VA)	x	300W	x	250V/1A	250V/1A
type of load									
Material of contact AgNi, 8A	x	250V/3A	250V/3A	24V/8A	24V/3A	24V/2A	24V/8A	24V/2A	x

VS120; VS220

type of load	AC-1, AC-7a, AC-21	AC-2	AC-3, AC-3e, AC-7b, AC23	AC-5a (230V)	AC-5b (230V)	AC-6a (230V)	AC-15 (230V)	DC-1 (24V, 48V)	DC-3 (24V, 48V)	DC-5 (24V, 48V)	DC-13 (24V, 48V)	LED	AC-6b, AC-7c (230V)
rated current	20A	12A	NO9A NC6A	8,8A	8,8A	4A	6A	20A, 15A	10A, 5A	10A, 4A	6A	2,4A per contact	switching capacity 30 uF

VS425

type of load	AC-1, AC-7a, AC-21	AC-2	AC-3, AC-3e, AC-7b, AC23	AC-5a (230V)	AC-5b (230V)	AC-6a (230V)	AC-15 (230V)	DC-1 (24V, 48V)	DC-3 (24V, 48V)	DC-5 (24V, 48V)	DC-13 (24V, 48V)	LED	AC-6b, AC-7c (230V)
rated current	25A	14A	8,5A	11,2A	8,8A	2,8A	6A	25A, 20A	15A, 8A	15A, 5A	6A	3,8A per contact	switching capacity 36 uF

VS440

type of load	AC-1, AC-7a, AC-21	AC-2	AC-3, AC-3e, AC-7b, AC23	AC-5a (230V)	AC-5b (230V)	AC-6a (230V)	AC-15 (230V)	DC-1 (24V, 48V)	DC-3 (24V, 48V)	DC-5 (24V, 48V)	DC-13 (24V, 48V)	LED	AC-6b, AC-7c (230V)
rated current	40A	25A	22A	20A	17,6A	10,8A	6A	40A, 25A	22A, 10A	20A, 8A	6A, 4A	11A per contact	switching capacity 220 uF

VS463

type of load	AC-1, AC-7a, AC-21	AC-2	AC-3, AC-3e, AC-7b, AC23	AC-5a (230V)	AC-5b (230V)	AC-6a (230V)	AC-15 (230V)	DC-1 (24V, 48V)	DC-3 (24V, 48V)	DC-5 (24V, 48V)	DC-13 (24V, 48V)	LED	AC-6b, AC-7c (230V)
rated current	63A	32A	30A	32A	22A	17,2A	6A	63A, 26A	25A, 11A	25A, 10A	6A, 4A	18A per contact	switching capacity 330 uF

Packing of 1-MODULE relay - 1 pc



Packing of 1-MODULE relay - 10 pcs



Packing of 1-MODULE relay with accessories



Packing of 2-MODULE relay - 1 pc




Packing of 3-MODULE relay - 1 pc




Dimensions


1-MODULE

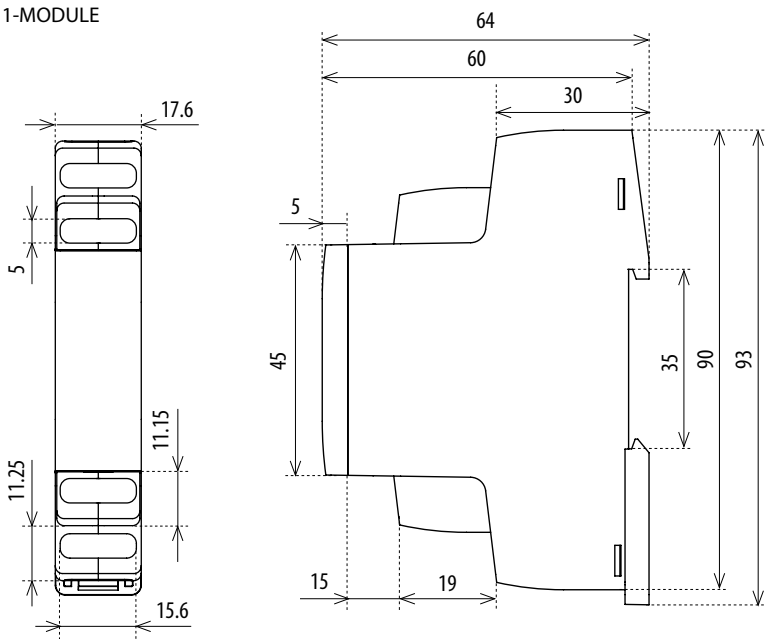


Front panels for 1-MODULE, examples of use:

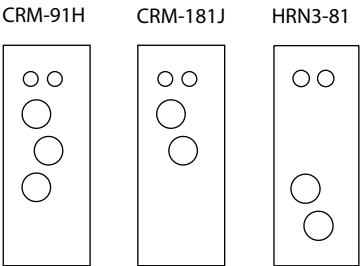



3-MODULE

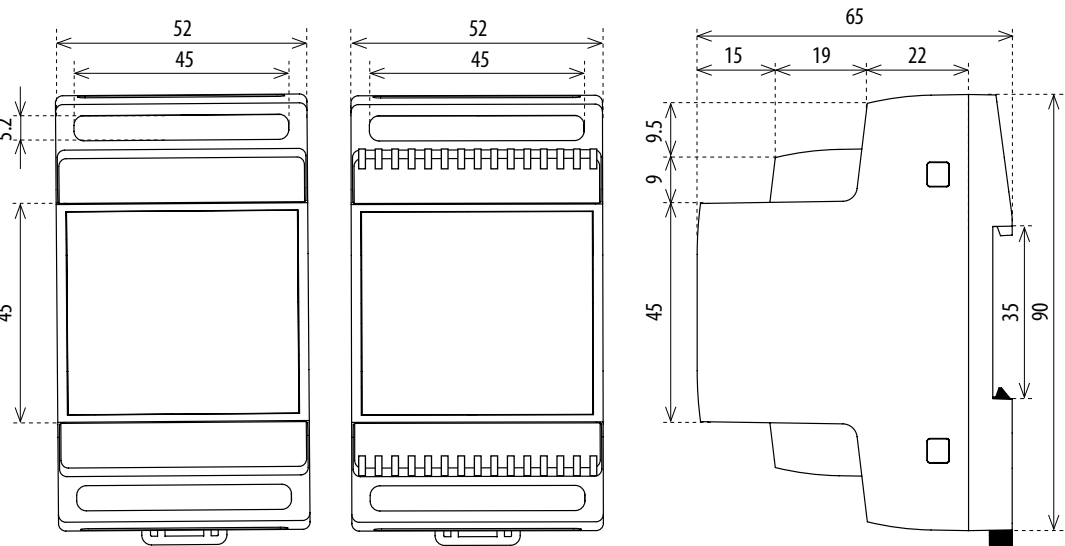

2-MODULE

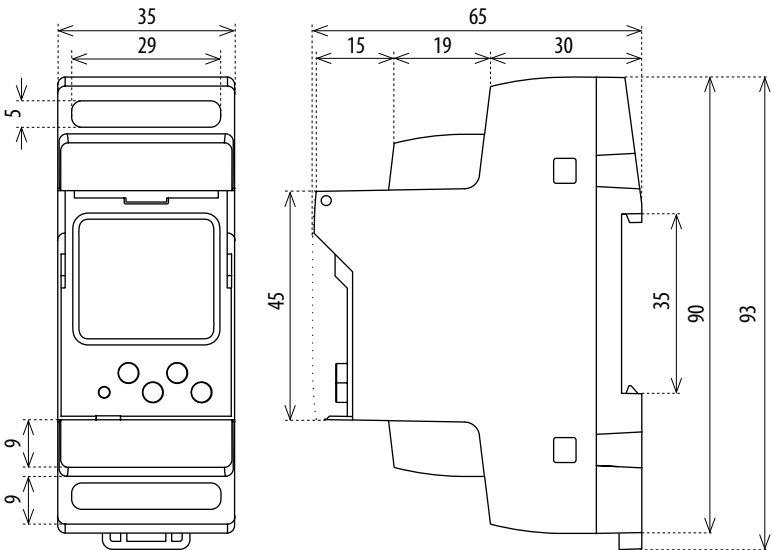


6-MODULE

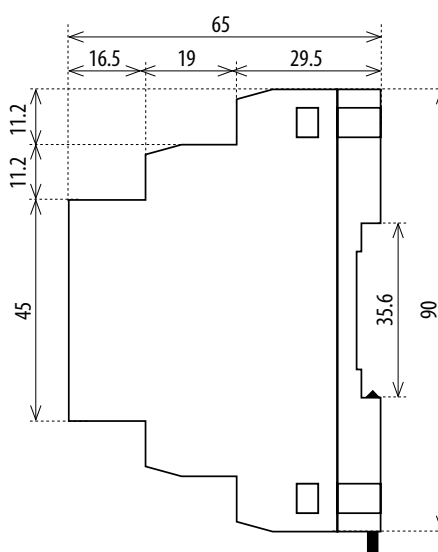
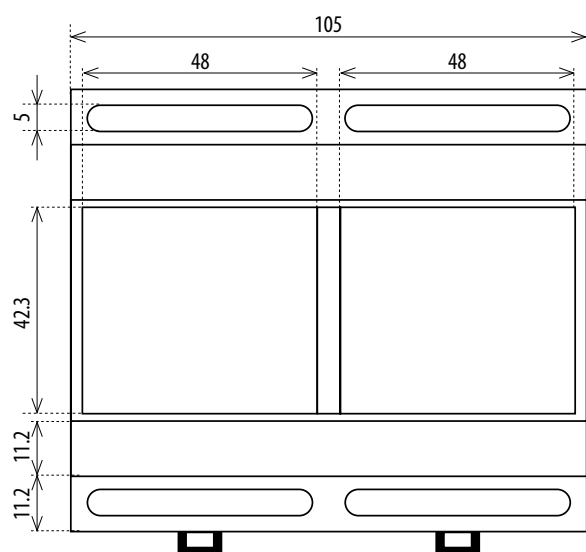


Front panels for 6-MODULE, examples of use:

PRI-53



PMR3-70


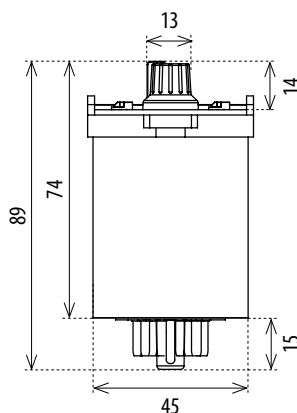
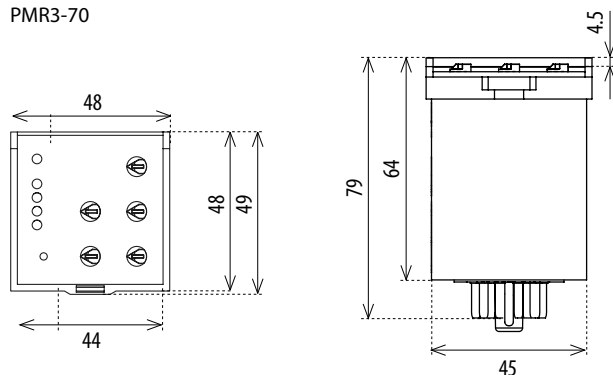


front panels PLUG-IN, examples of use:

PTRx-216T

PTRx-216K

PMR1-3x







Dimensions

VS120
VS220

VS425

VS440
VS463


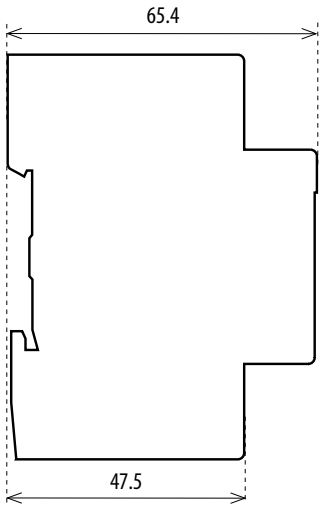
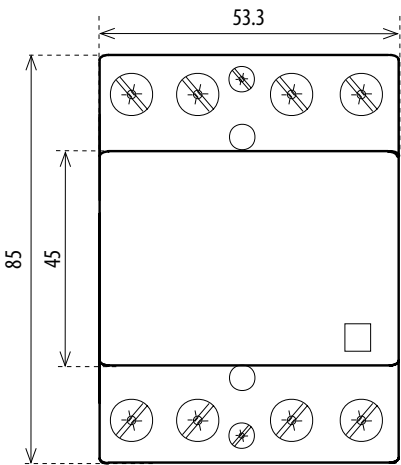
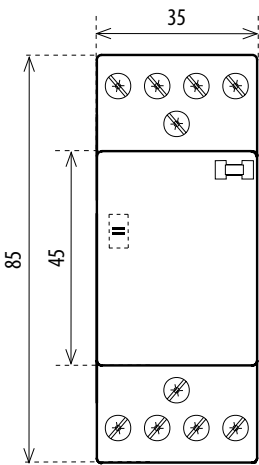
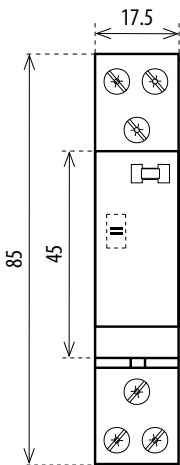


PS1M-15/12V
PS1M-15/24V

PS2M-24/12V
PS2M-30/24V



PS3M-54/12V
PS3M-60/24V

PS4M-85/12V
PS4M-92/24V

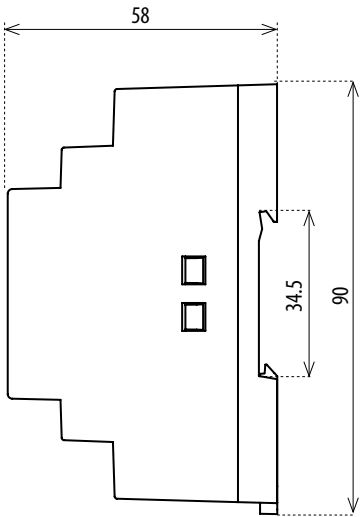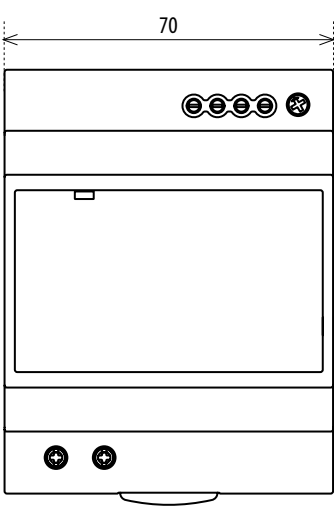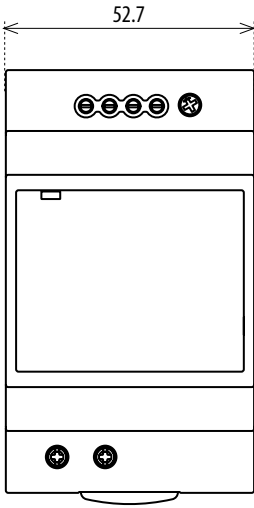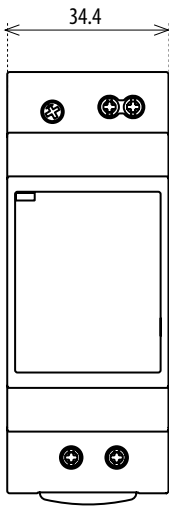

Multifunction time relay CRM-91H, CRM-93H

- for electric appliances, where is necessary to change the exact timing - controlling of the illumination, heating, motors, machines, ventilators, contactors

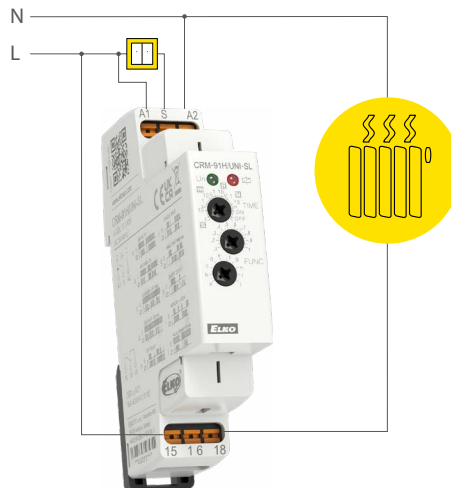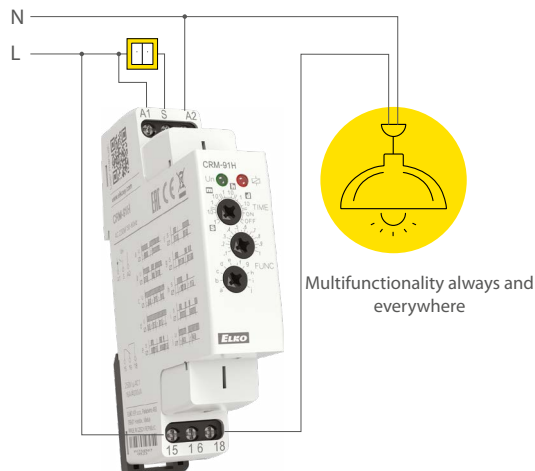


Time relay PLUG-IN type PTRM-216TP

- serves to control light signalization, heating, motor and fan control etc.



Delay OFF without supply voltage CRM-82TO

- delayed back-up switch off at current failure (emergency illumination, emergency respirator)

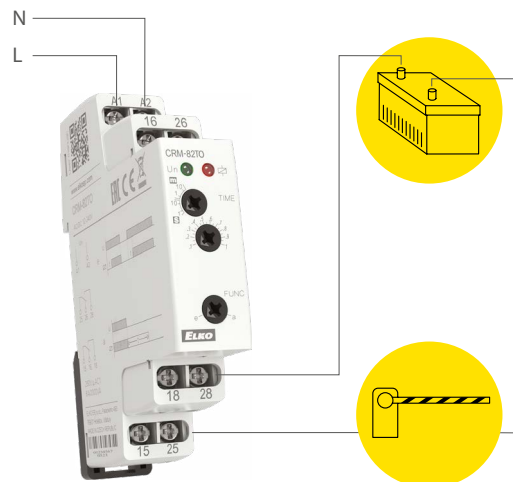


Asymmetric flasher CRM-2H

- regular rooms ventilation, cyclic humidity exhaustion, illumination controlling, circulation pump, flash, warning appliances, regular pump down, regular irrigation via electromagnetic valve



Singlefunction time relay CRM-181J


- time switch, using for run down the pump after switch off the heating, switching of ventilators

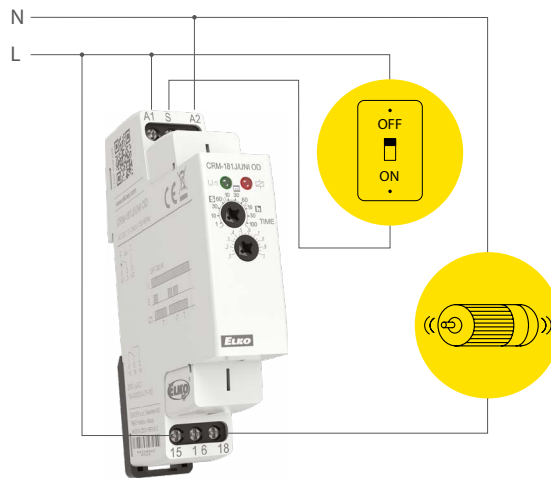

Examples of usage


Modular contactor VS120, VS220, VS425

- to switch circuits for supply and control heating, lights, air-conditioning and other el. devices.
- Switches loads AC-1, AC-3, AC-7a, AC-7b, AC-15.

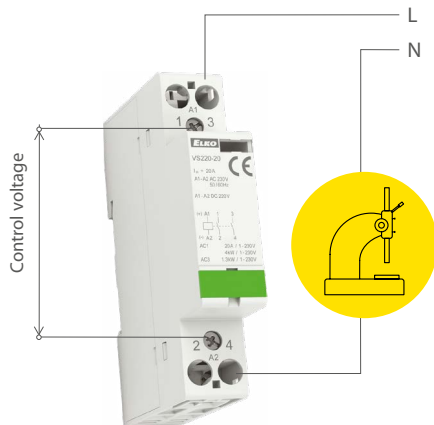


Voltage monitoring relay HRN-32/2

- start of back-up supply in case of failure

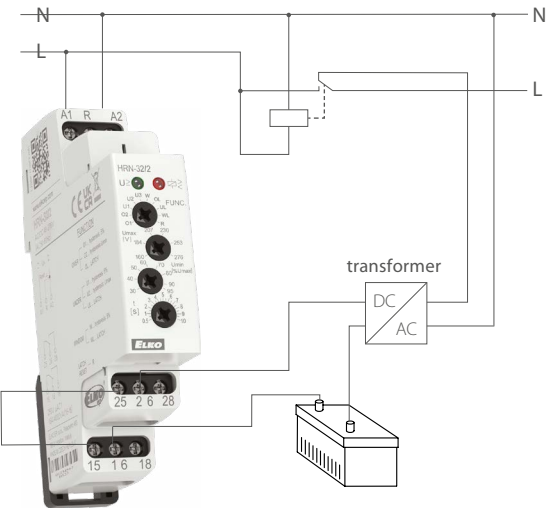


Monitoring voltage relay HRN-31 (HRN-31/2)

- monitoring of mains voltage for appliances inclinal to supply tolerance

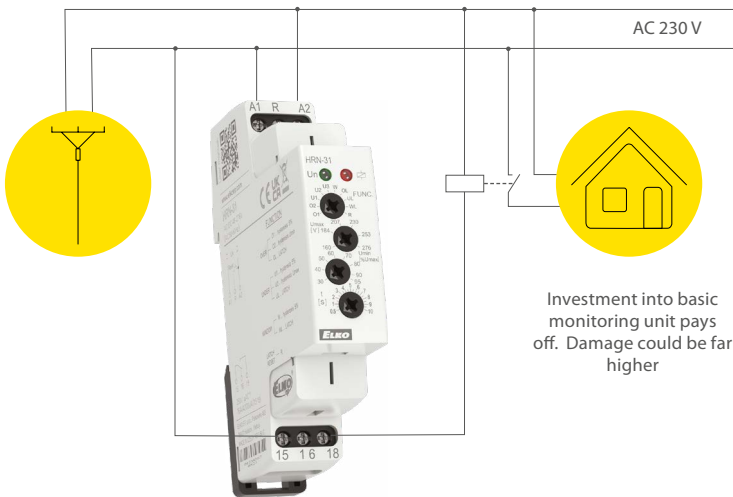


Monitoring voltage relay HRN-31 (HRN-31/2)

- protection of appliances against under-/overvoltage

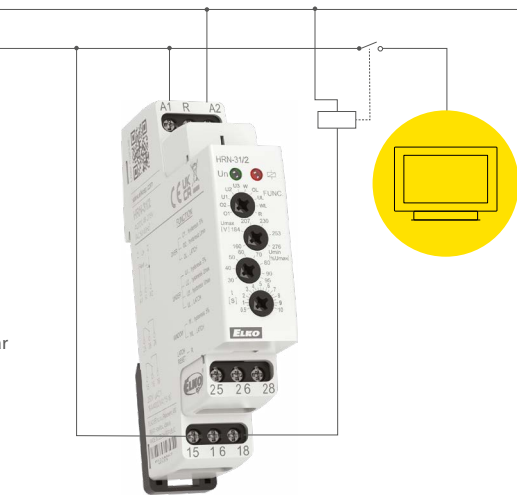


Monitoring voltage relay HRN-36

- load disconnected when voltage declines or battery is discharged

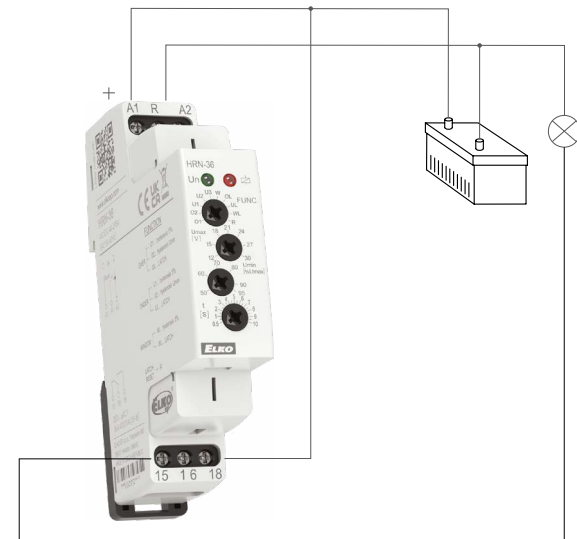


Modular contactors VS440, VS463

- to switch supply and control circuits for heating, air-conditioning and other el. devices, switching 3-phase motors
- Switches loads A-1, AC-3, AC-7a, AC-7b, and AC-15

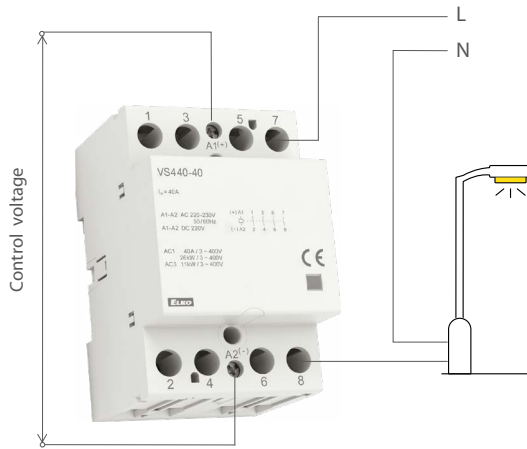


Power relays VS

- switching of higher load than is capacity of switched unit = repeater
- assistant light controlling, signalling, boilers, ...

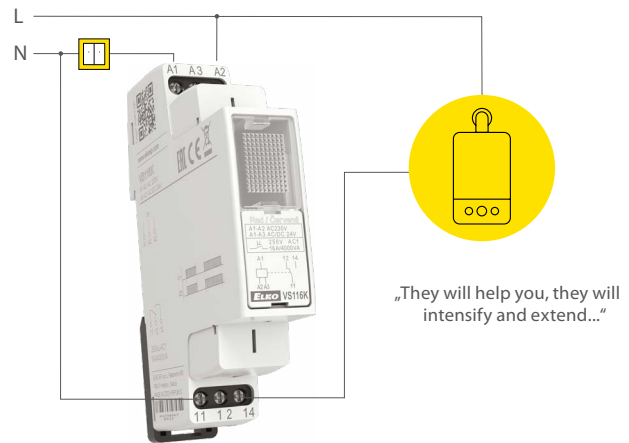


Monitoring current relay PRI-51, PRI-32

- current-limiting relay (on one branch two appliances, which never work together), controlling systems, motors, heating, current indication, controlling of 1-phase motor run down, during the installation of main housing switchboard could be controlled via eye, if the cooker is not switched
- in connection with current transformers, it is possible to extend current ranges up to 600A, which makes more things possible

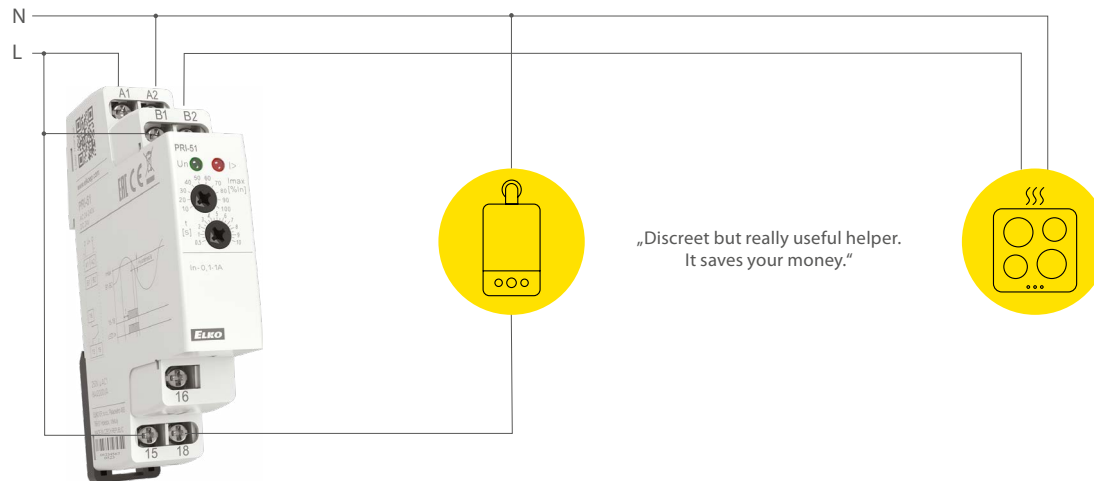

More Than Just Resellers

We innovate, develop and manufacture out products in-house




30 Years

On the Market




16 Years

ISO Certification



40

Developers




400

Employees




21 500 sq ft

Manufacturing
Space




200

Proprietary Plastic
Mods

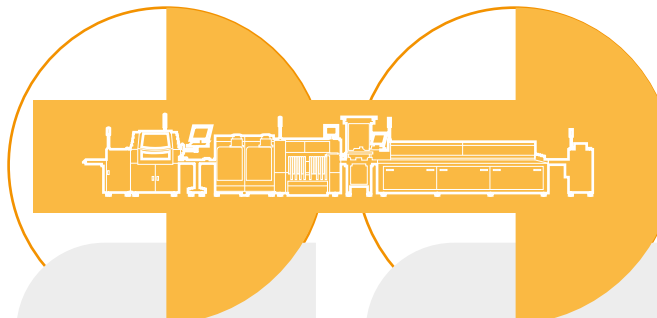


3

SMD Lines




1 Mil.

Components
per Day



600 000

Products
per Year



21 500 sq ft

Finalization
and Dispatch




2 000

Warehousing
Spaces



3

Printing Lasers

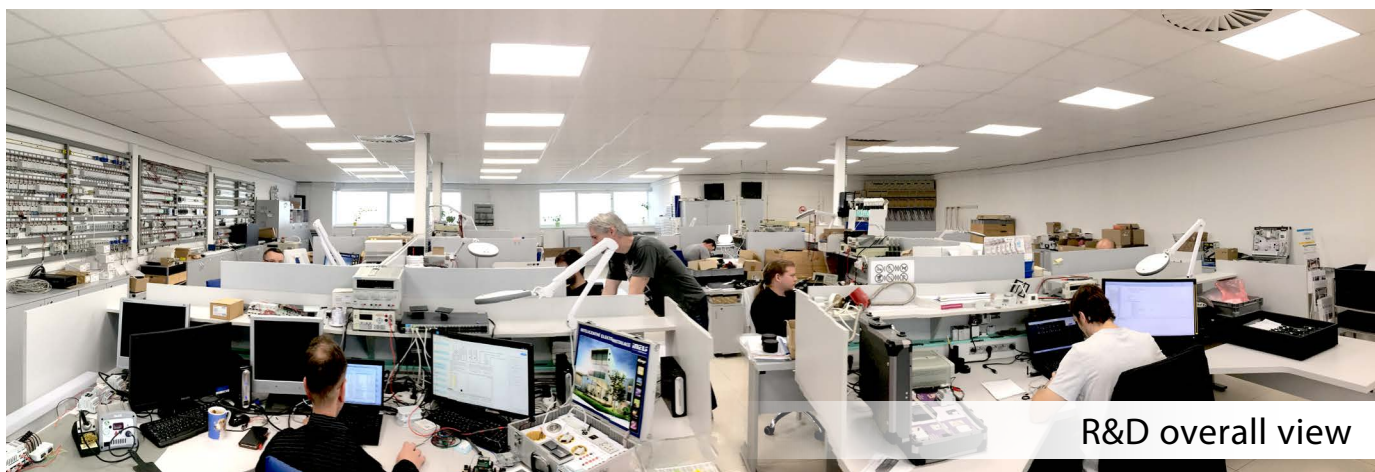

R&D overall view



Manufacturing hall



Testing lab



Finalization and dispatch



Jan Pacovsky

Managing member, CEO

Cell: +1(608)746-1332

Email: pacovsky@elkoep.na

www.elkoepna.com

Headquarters | 1150 NW 72nd Ave, Tower I, Suite 455 #9226 | Miami, FL 33126 |

phone: +1(608)746-1332 | pacovsky@elkoepna.com | www.elkoepna.com

Central Warehouse | 7200 Intermodal Dr, Louisville, KY 40258

